


# Photo Sensors

## for Steel & Heavy industries

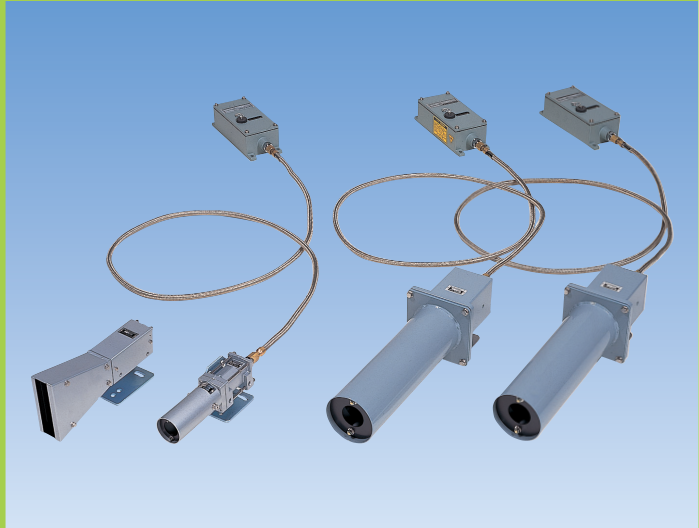

### HMD

- FD-A300 P Series
- FD300A series
- FD600A series
- FD-A310C series
- FD-A300AN series
- HMPD801-EX series
- KD150C series
- KD50 series
- HD series

### CMD




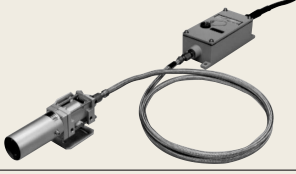




- FT44A series
- FT10A series
- FT101 series
- KL(R)50 series
- NT50(P)/NT100(P) series

### Punch hole detection sensor

- SWD55
- SWD60
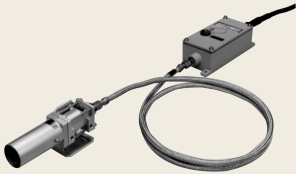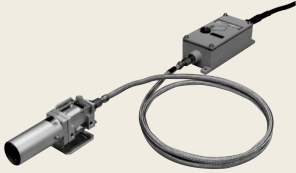
# Photo Sensors for Steel and Heavy Industries

## HMD Overview and List of Models

Operating temperature range (°C)	Appearance	Type	Model/Series Set Price	Detection object temperature (min.)		See Page
				700	650	
-30 -25 -20 -10 0 50 100 150 200 -25 Detecting head 200 -25 Amplifier 50		Fiber type	FD-A300P Series	2m 490/350 5m 540/385 10m 610/445 (High temperature range/low temperature range)	474	
-25 Detecting head 200 -25 Amplifier 50			FD300A FD600A Series	2m 580/360 5m 585/395 10m 595/455 (FD600A/ED300A)	482	
-25 Detecting head 200 -25 Amplifier 50			FD-A310C Series	0.5m 340 1m 360 2m 385	488	
-25 Detecting head 200 -25 Amplifier 50			FD-A300AN Series	2m 720~340 7m 760~360	492	
-10 Without water-cooling 55 With water-cooling 80		Water-cooled type	HMPD801-EX Series	800	494	
-25 Without water-cooling 55 With water-cooling 150			KD150C Series	150	496	
			KD50 Series	450	498	
-20 Detecting head 200 -30 HD502F 70 -10 Amplifier 50		Simplified type	HD400 Series	430(0.5m) 440(1m) 490(2m)	500	
			HD502F Series	560		
-25 HD601 70 -25 HD301 50 -10 Amplifier 50			HD301 Series	350		
		HD601 Series	650			







# Photo Sensors for Steel and Heavy Industries

## Detection Field of View Characteristics (Typical example)

Type	Series name	Shape	Detection field of view		Distance (m)																	
			Standard	Wide	2cm	5cm	10cm	0.5m	1m	2m	3m	4m	5m	10m								
Fiber type	FD-A300P Series FD300A/ FD600A Series FD-A300AN Series	Standard	OHA					40	50	100	150	200	250	500								
		Wide	OHW1		35	40	100	200	80	400	120	600	160	800	200	1000	400	2000				
		Wide	OHW2		30	30	200	400	60	800	90	1200	120	1600	150	2000	300	4000				
	Standard							24	40	84	128											
Water-cooled type	HMPD 801-EX	Standard						30	30	200	400	60	800	90	1200	120	1600	150	2000	300	4000	
	KD150C	Standard								75	150	225										
	KD50	Standard								25	50	75	100	125	250							
		Wide									60	120	180	240	300	600						
Simplified type	HD400 HD502F	Standard		8	21	43																
	HD301									30	70	140	210									
	HD601										25	50	100	150								

# Photo Sensors for Steel and Heavy Industries
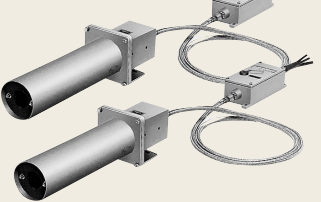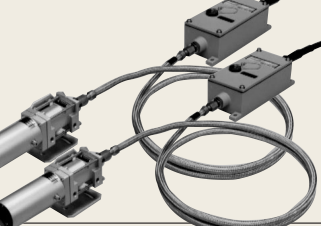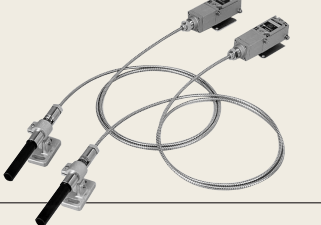
## CMD Overview and List of Models


Operating temperature range (°C)	Appearance	Type	Model/Series Set Price	Detecting distance (m)		See Page
				10	20 30 40 50 60 70 80 90	
-25 <b>Detecting head</b> 200 -25 <b>Amplifier</b> 55		Fiber type	<b>FT44A Series</b>	50		504
-25 <b>Detecting head</b> 200 -25 <b>Amplifier</b> 55				2m 40 3·4·5m 30 7·10m 20	514	
-25 <b>Detecting head</b> 200 -25 <b>Amplifier</b> 55				0.5m 30 3m 20 10m 15		
<b>With water-cooling</b> 150 -10 <b>Without water-cooling</b> 55		Water-cooled type	<b>KL(R)50 Series</b>	50		526
-25 55		Simplified type		<b>NT50(P)</b>	50	
-25 55			<b>NT100(P)</b>		100	

# Photo Sensors for Steel and Heavy Industries

## Directional Characteristics (Typical example)

Type	Model and series name	Shape	Detecting distance (m)								
			5	10	15	20	25	30	50	100	
<p>(Approximate diameter in mm)</p>											
Fiber type	FT44A laser type	Standard	OHA	200	400	600	800	1000	1200		
		High-powered	OH2	100	200	300	400	500	600		
	FT10A	Standard	OHA	200	400	600	800	1000	1200		
Water-cooled type	KL(R)50			400	600	720	760	800	840		
Simplified type	FT101			100	150	200	250	300	350	(With OHC)	
	NT50P				2000		3600		4500	6000	
	NT100P				500		1000		1500	2400	4400

Sensitivity adjustment unnecessary: auto sensing  
One sensor covers a wide range of temperatures from low to high

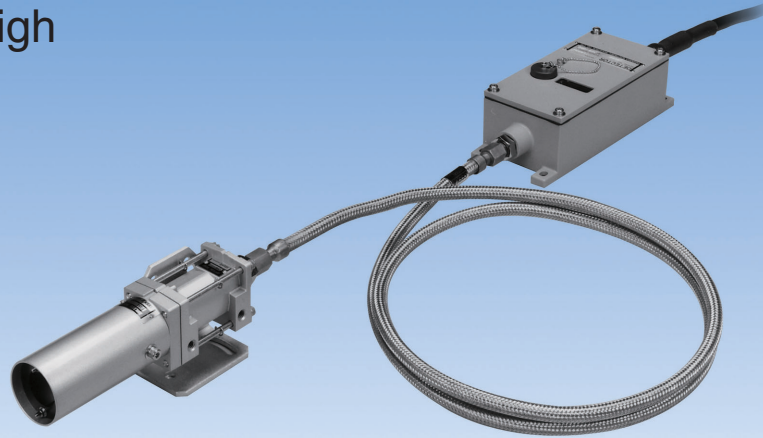

FD-A300P is a series of optical fiber-type hot metal detection photo sensor (HMD) that directly detect infrared energy emitted from heated material (steel products, etc.).

Equipped with a controller that employs an 8-bit microcomputer, this intelligent hot metal detection sensor integrates various functions.

## Features

- Sensitivity adjustment unnecessary: auto sensing mode  
Auto sensing mode automatically adjusts the operation level based on the received light intensity at detection of heated material and manual mode that allows manual setting of operation level are available.
- One sensor for a wide range of temperatures  
Two different ranges for low and high temperatures can be switched with external signal and support low and high temperatures.
- Numerical indication of received light intensity convenient for operation level setting  
Received light intensity at detection of heated material is represented in value between 0.1 and 10.0 for arbitrary setting of output operation level.  
Broad dynamic range of amplifier allows numerical expression of wide range of temperatures of heated materials in analog quantity, which, unlike the conventional HMD sensitivity adjustment, facilitates setting of operation level in concrete figures.
- Recall function: received light intensity detected in the past viewable  
Maximum received light intensity of heated material detected is stored to allow viewing during non-detection.  
Eight most recent maximum received light intensities of heated materials are stored to allow viewing of previous received light intensities in figures by selecting a mode.

## Ordering Guide

The FD-A300P Series does not have set model Nos. Order by specifying the individual model Nos. of components. Models marked with \* compose a set shown on the previous page.

### Example





For ordering sensor with the following properties:

- Temperature of detection object: 600 °C or higher
- Mini power relay output
- Fiber length: 2 m
- Standard-view- Compact, lightweight Airless hood

Component	Model	Quantity
Hood	<b>F38A</b>	1
Optical head	<b>OHA</b>	1
Fiber	<b>FG2</b>	1
Amplifier	<b>FD-A300P</b>	1

## [Optical head]

- The standard and wide types have different optical systems. Detection field of view characteristics (Typical example)

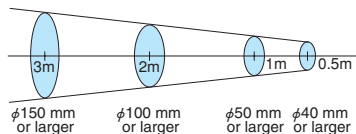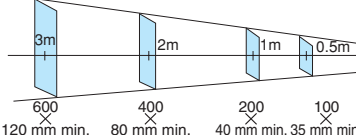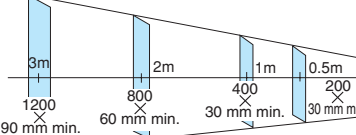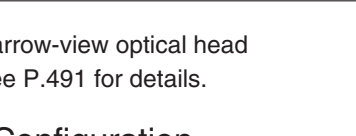
	Field of view	Model
Standard type		<b>OHA</b> ※
		
Wide type		<b>OHW2</b>
		

- Narrow-view optical head  
See P.491 for details.

## Configuration

- **Hood**  
Provided for prevention of soiling of optical head lens or protection from disturbing light. Choice between airless and air purge hoods is available.

- **Optical head**  
Optical component that detects infrared radiation from heated material and condenses into fiber optic cable. Standard-, wide- and narrow-view types are available according to the intended detection field of view.

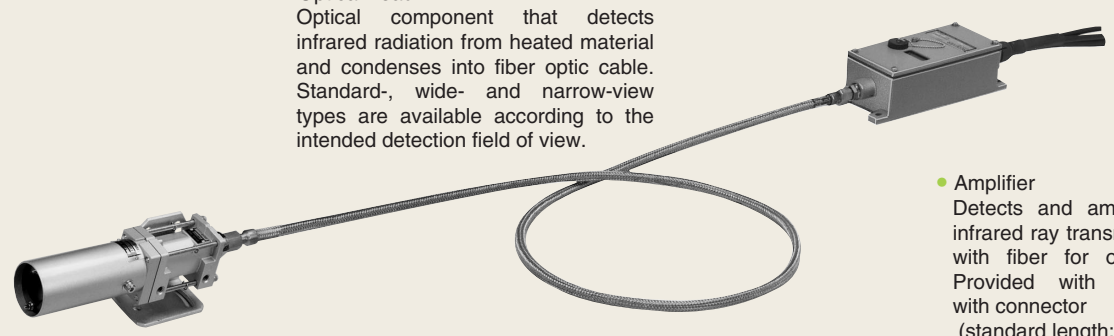

- **Optical head**  
Optical component that detects infrared radiation from heated material and condenses into fiber optic cable. Standard-, wide- and narrow-view types are available according to the intended detection field of view.


- **Amplifier**  
Detects and amplifies infrared ray transmitted with fiber for output. Provided with cable with connector (standard length: 2 m).

- **Fiber optic cable**  
Light guide that transmits infrared ray captured with optical head into amplifier. Flexible tube with stainless steel braid is used as covering.

## [Hood]

Type	Length	Model	Applicable optical head	
Airless hood	Standard-view	120mm	<b>F38A</b> ※	<b>OHA</b>
		200mm	<b>F38A-02</b>	
		300mm	<b>F38A-03</b>	
		400mm	<b>F38A-04</b>	
		500mm	<b>F38A-05</b>	
Airless hood	Wide-view	200mm	<b>F38W</b>	<b>OHW1</b> <b>OHW2</b>
		200mm	<b>F38W</b>	<b>OHW1</b> <b>OHW2</b>
Air purge hood	Standard-view	200mm	<b>F38PC-02</b>	<b>OHA</b>
		300mm	<b>F38PC-03</b>	
		400mm	<b>F38PC-04</b>	
		500mm	<b>F38PC-05</b>	
	Wide-view	—	<b>302W</b>	<b>OHW1</b> <b>OHW2</b>

## [Fiber optic cable]

Length	Model	Appearance (Typical example)
2m	<b>FG2</b> ※	
3m	<b>FG3</b>	
4m	<b>FG4</b>	
5m	<b>FG5</b>	
7m	<b>FG7</b>	
10m	<b>FG10</b>	
15m	<b>FG15</b>	
20m	<b>FG20</b>	
30m	<b>FG30</b>	

## [Amplifier] Appearance common to all models

Control output type	Model
Mini power relay output	<b>FD-A300P</b> ※
Reed relay output	<b>FD-A300PH</b>
Solid-state output	<b>FD-A300PC</b>
Photo-MOS relay output	<b>FD-A300PM</b>

# FD-A300P

## Rating/Performance/Specification/Environmental Specification

Output specification				
Model	FD-A300P	FD-A300PH	FD-A300PC	FD-A300PM
Output type	Mini power relay output	Relay output	Solid-state output	Photo-MOS relay output
Control output				
ON-OFF control				
Operation mode	Light-ON/Dark-ON selector switch provided (DIP switch) Default setting: Light-ON (output activated when light received)			
Rating	Transfer contact MAX 5A 250V AC (Resistance load)	Transfer contact MAX 0.5A 48V DC (Resistance load)	MAX 0.5A 250V AC/DC (Resistance load)	MAX 0.1A 100V AC/DC (Resistance load)
*1) Response time	About 15ms (17ms)	About 5ms (7ms)	About 5ms (7ms)	About 4ms (6ms)
STB output	a contact			
*2) Rating	5A 250V AC max. (Resistance load)			
General specification				
Valid lens diameter	28mm DIA (OHA)			
Power Supply	100 - 220V AC +10%, -15% 50/60Hz			
Power consumption	10W max.			
Connection	with Connector cable 2m (CVV1.25mm <sup>2</sup> )			
Ambient temperature	Optical head, Fiber: -25 to +200°C Amplifier: -25 +50°C (Non-freezing)			
Storage temperature range	-40 to +70°C (Non-condensing)			
Ambient humidity	35 to 85%RH max. (Non-condensing)			
Fiber-optic unit allowable bending radius	50mm			
Insulation resistance	Between power supply and case: 500 VDC, 20 MΩ or higher			
	Between output and case: 500 VDC, 20 MΩ or higher			
	Between power supply and output: 500 VDC, 20 MΩ or higher			
Dielectric withstanding	Temperature range selection input: omitted			
	Between power supply and case: 1500VAC for 1 minute			
	Between output and case: 1500VAC for 1 minute			
	Unless, Reed relay output: AC1000V for 1 minute			
Vibration	Between power supply and output: 1500VAC for 1 minute			
	Unless, Reed relay output: AC1000V for 1 minute			
	Temperature range selection input: omitted			
Shock	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction			
Protective structure	500 m/s <sup>2</sup> / 3 times each in 3 directions			
Weight	Optical head	Basic type (OHA): 680g Wide type (OHW1/OHW2): About 1300g		
	Airless hood	F38A: about 240g F38A-02: about 340g F38A-03: about 430g	F38A-04: about 550g F38A-05: about 650g F38W: about 600g	
	Air purge hood	F38PC-02: about 240g F38PC-03: about 300g F38PC-04: about 370g	F38PC-05: about 440g 302W: about 600g	
	Fiber	FG2: about 0.7kg FG3: about 0.9kg FG4: about 1.1kg	FG5 : about 1.3kg FG7 : about 1.6kg FG10: about 2.1kg	FG15: about 3.1kg FG10: about 4.1kg FG30: about 6.1kg
	Amplifier	About 1.5kg		

## Amplifier Major Specification

Light-sensitive element	Ge photodiode
Sensitivity wavelength	0.8~1.8μm
HMD function	Auto sensing mode (automatic setting of operation level) Manual mode (automatic setting of operation level)
Detecting temperature range	2 ranges: low temperature and high temperature ranges (selectable with external input)
Auxiliary function	- Succeed sensing function/STB function/Initial check function/Recall function
Indication	- Output indicator (OP.L): red LED / STB indicator (STB): green LED - Received light intensity display: 3-digit figure
Received light intensity scale range	0.1-10.0 (in increments of 0.1)
Operation level setting range	Auto sensing mode: 1.0-8.0 (in increments of 0.1) / Manual mode: 1.0-9.0 (in increments of 0.1)

\*1) Response speed is for operation level setting at [received light intensity -2.0]. With extremely low operation level setting with reference to received light intensity, the response time for deactivation becomes longer. Values in parentheses show response times for deactivation with operation level setting of [1.0] against received light intensity [10.0].


\*2) STB output is mini power relay for all models regardless of detection output type.

## Input/Output Circuit and Connection


### Control output

Model FD-A300P

Model FD-A300PH




Model FD-A300PC




Saturation voltage: 3 V max.

Model FD-A300PM



Saturation voltage: 1 V max.


### STB output (all models)



When connecting an inductive load such as relay as the load, be sure to use diode, surge absorber, etc. for protection of output transistor from back electromotive force.



## Amplifier panel layout (with case lid removed)

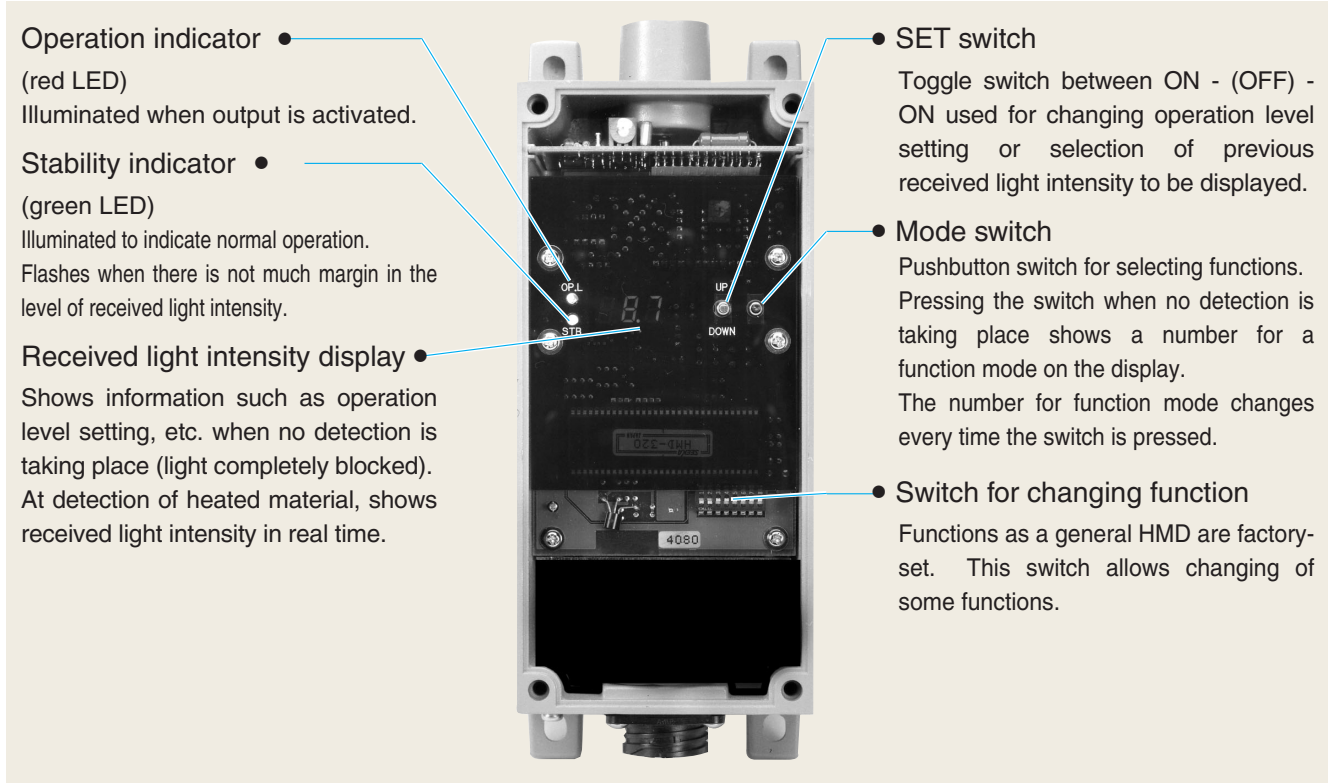

## Lowest Detectable Temperature

### Select between two (high and low) temperature ranges by mode setting

Low temperature range	350~ 800°C
High temperature range	490~1300°C

Guidelines are given below for the temperature of a detection object larger than the detecting field of view with optical head (OHA) and fiber optic cable (FG2) used for detection.

### Guidelines for minimum temperature of detected object

The minimum temperature depends on the length of the fiber optic cable used or detecting field of view of the optical head. Temperatures shown in this table are for heated material larger than the field of view. If the material is smaller than the field of view, the lowest detectable temperature is increased. The guidelines are for the minimum temperatures of detection objects and include margins of about 4 times as much as the inherent performance. For detailed data, see "Minimum Detectable Object and Lowest Detectable Temperature."

Fiber length	Low temperature range		Low temperature range	
	Optical head		Optical head	
	Standard-view model OHA	Wide-view model OHW1/OHW2	Standard-view model OHA	Wide-view model OHW1/OHW2
2m	350 °C min.	415 °C min.	490 °C min.	590 °C min.
3m	356 °C min.	430 °C min.	510 °C min.	610 °C min.
4m	375 °C min.	445 °C min.	525 °C min.	625 °C min.
5m	385 °C min.	450 °C min.	540 °C min.	635 °C min.
7m	400 °C min.	475 °C min.	560 °C min.	660 °C min.
10m	445 °C min.	520 °C min.	610 °C min.	725 °C min.
15m	480 °C min.	555 °C min.	655 °C min.	775 °C min.
20m	500 °C min.	580 °C min.	680 °C min.	800 °C min.
30m	530 °C min.	610 °C min.	720 °C min.	850 °C min.

# FD-A300P

## Convenient High Performance and Various Functions

HMD function in 2 modes and auxiliary function in 4 modes provided in addition to auto sensing mode, eliminating need for sensitivity adjustment

### HMD modes

#### Mode0 auto sensing mode

- Automatically sets the operation level according to the received light intensity at detection of heated material. Factory setting for the operation level is 1.0. Once any heated material is detected, the received light intensity data at that point is used as the basis for automatic setting of the next activation level and deactivation level.
- This operation takes place every time heated material is detected.

#### Mode1 manual mode

- HMD operation with the operation level fixed.
- The operation level can be manually adjusted at will. The set operation level is stored, which remains applied even after power-up.

### Auxiliary function modes

#### Mode2

- Operation level setting mode for high temperature range (H)
- The sensor temperature ranges may be switched with external input for selection between low temperature detection and high temperature detection. This sets the operation level for the high temperature range regardless of the currently active temperature range.

#### Mode3

- Operation level setting mode for low temperature range (L)
- As with Mode 2, this sets the operation level for the low temperature range regardless of the currently active temperature range.

#### Mode4 (recall function)

- Displays the previous maximum data for received light intensity.
- The current maximum value of the received light intensity is stored at every activation and deactivation.
- Up to 8 data may be stored.

#### Mode5


- Mode that helps identify the cause of any STB output.

## STB detection function

Gives an alert for any abnormality found in the received light intensity level with the STB output and flashing of the lamp.

Selection of **Mode5** enables detection of received light level error in 3 patterns:

**STB 1** : Insufficient margin of received light intensity at detection with reference to operation (activation) level

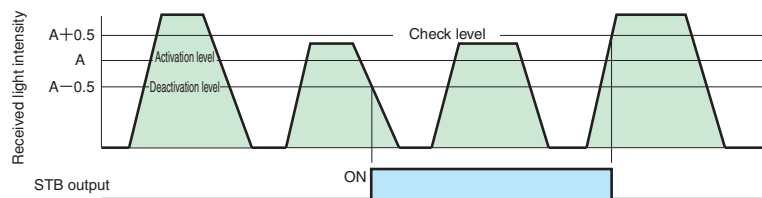

The check level for STB 1 is set at a level 0.5 or 1.0 higher than the activation level (A).


Activation level (A) ≤ 5.0: Check level = A + 0.5

Activation level (A) > 5.0: Check level = A + 1.0

Alert is given when the detection object has passed and the received light intensity detected at deactivation is equal to or lower than the check level.


This alert output is reset when the received light intensity exceeds the check level.

**STB2** : Heated material passed but not detected due to excessively high activation level setting

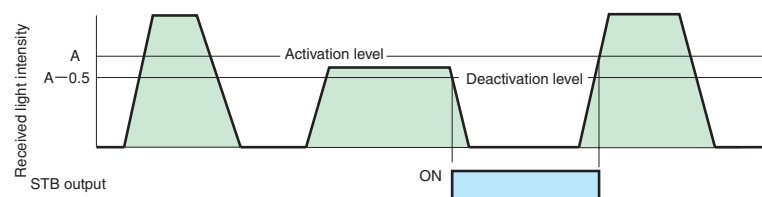

Signal is output when the received light intensity at non-detection is 0.1 or higher.


**STB3** : Light not fully blocked even with no heated material (light blocking state)

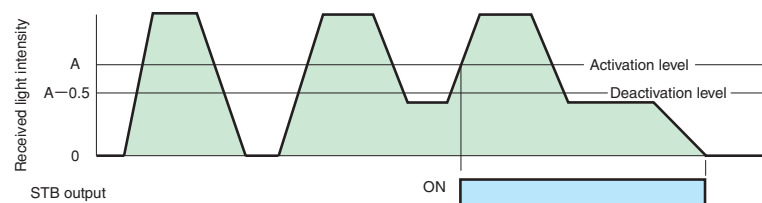


## Minimum Detectable Object and Lowest Detectable Temperature

The graphs below may be used to find the relationship between the diameter of a detection object and its lowest detectable temperature.

- The minimum detectable object diameter means the width of a round or square bar or board with a length equal to or more than the field of view that may be detected at any point in the field of view.

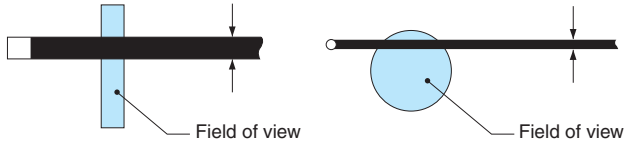

- Detecting distance means the distance between the surface of a detection object and the center of the optical head mounting.

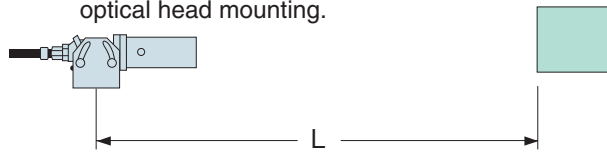

- Using graphs

The graphs show data for a detecting distance of 1 m. For a detecting distance other than 1 m, use the following formula to find the coefficient  $K$  and multiply the reading on the Y-axis of the graph (detection object diameter) by the coefficient  $[K]$ .  
 Coefficient  $K = L + (0.6 - 0.6 \times L)$  ( $L =$  detecting distance (m))  
 Example: for detecting distance of 50 cm ( $L = 0.5$ )  
 $K = 0.5 + (0.6 - 0.6 \times 0.5) = 0.8$   
 The coefficient is 0.8. Multiply this by Y-axis reading of the graph (detection object diameter):  $50 \times 0.8 = 40$   
 This means that the point for detection object diameter 50 mm must be regarded as the point for diameter 40 mm.  
 Multiply other values by the coefficient above in the same way and complete the replaced Y-axis scale.


For detection with (OHW1/OHW2) used as optical head and detecting distance of 1 m or shorter  
 Use the distance as the coefficient.

Example: for detection using OHW1 and distance 0.7 m  
 In this case, the coefficient is 0.7.  
 Multiply the Y-axis readings of the graph by 0.7 to complete the replaced Y-axis scale.  
 The point for detection object diameter 200 must be regarded as the point for diameter 140.


For detecting distance of 1 m or longer (with any optical head model)  
 Use the distance as the coefficient.

Example: for detecting distance 2.5 m  
 In this case, the coefficient is 2.5.  
 Multiply the Y-axis readings of the graph by 2.5 to complete the replaced Y-axis scale.


Temperature range	L
Optical head	OHA

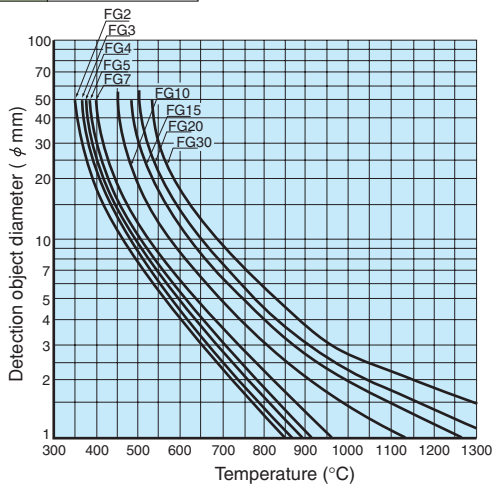


Temperature range	H
Optical head	OHA

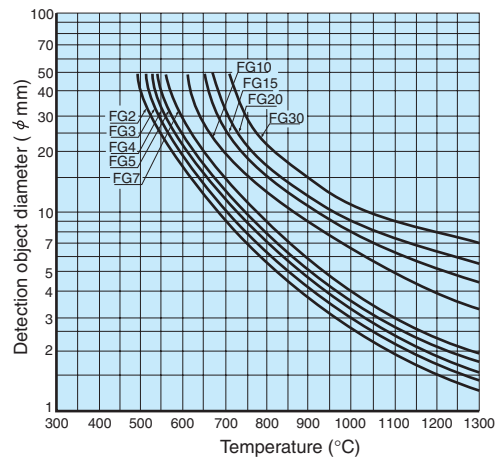

Temperature range	L
Optical head	OHW1/OHW2

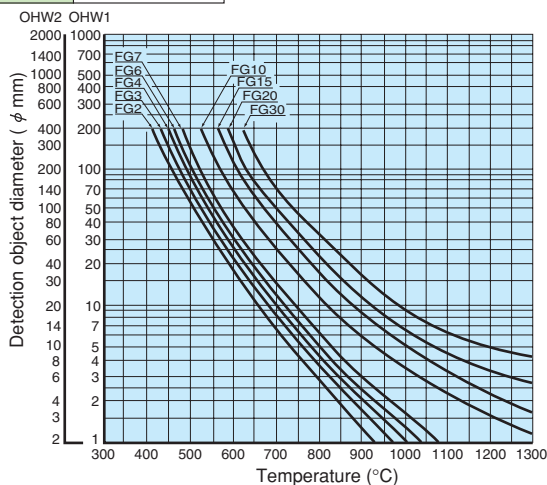


Temperature range	H
Optical head	OHW1/OHW2

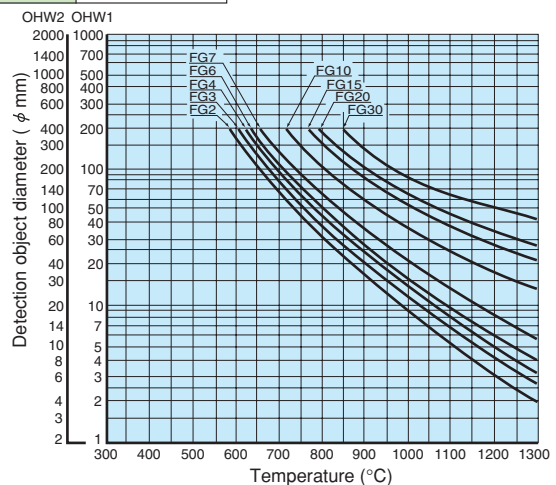


# FD-A300P

## Light Axis Alignment

- Alignment with optical sight  
Use the optical sight provided on the optical head.

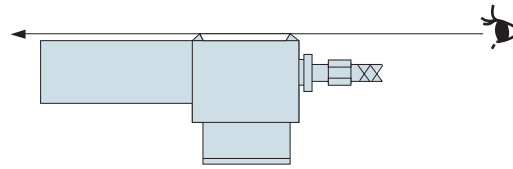

- Alignment with Light axis aligner (optional)  
Mount an Light axis aligner containing a halogen lamp on the optical head and radiate the light beam pattern through the lens surface.  
The projected beam pattern shows the detection field of view, which allows more accurate field adjustment.

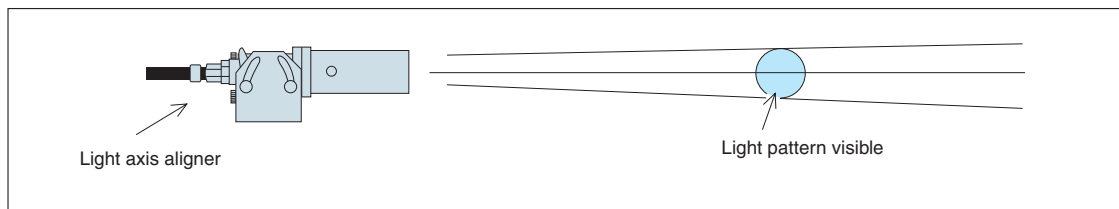

Product name : Light axis aligner for fiber optic sensor


Model : OHF-CL/CLP

- Light axis aligner  
OHF-CL
- Power supply unit  
OHF-CLP
- Halogen lamp (spare)  
OHF-L5

## Dimensions (in mm)


### Amplifier

CAD

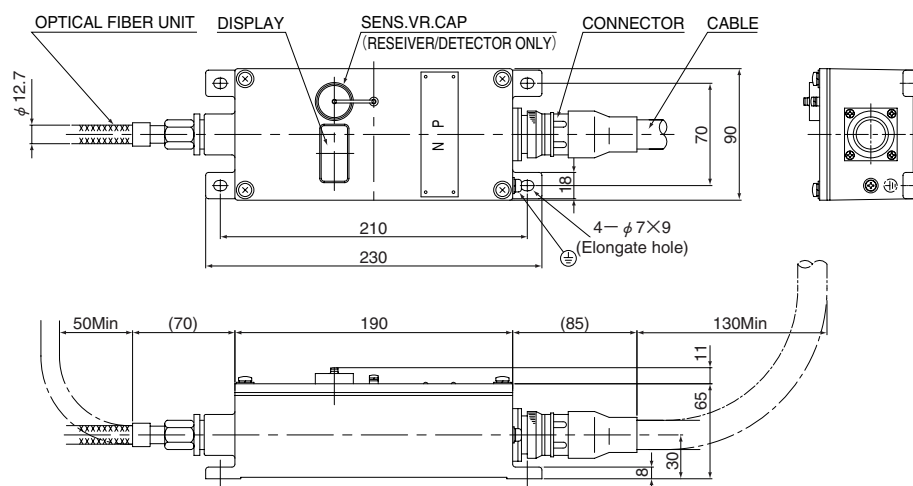

### Fiber

CAD

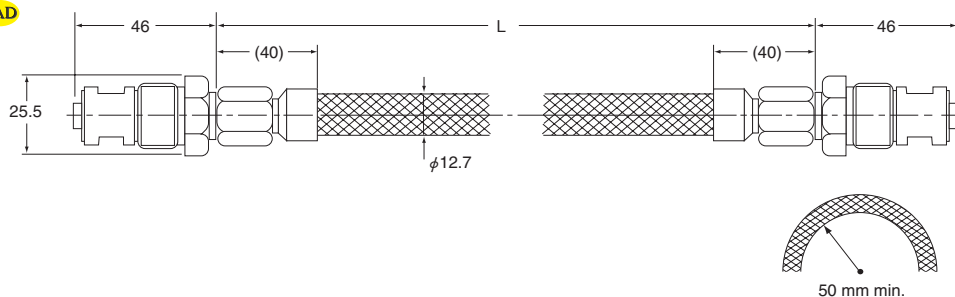

Model	Length(L)
FG2	2m
FG3	3m
FG4	4m
FG5	5m
FG7	7m
FG10	10m
FG20	20m
FG30	30m


# FD-A300P

## Dimensions (in mm; example combinations of hood and applicable optical head)


### Example of combination of Airless hood and optical head

Optical head  
Model OHA

CAD

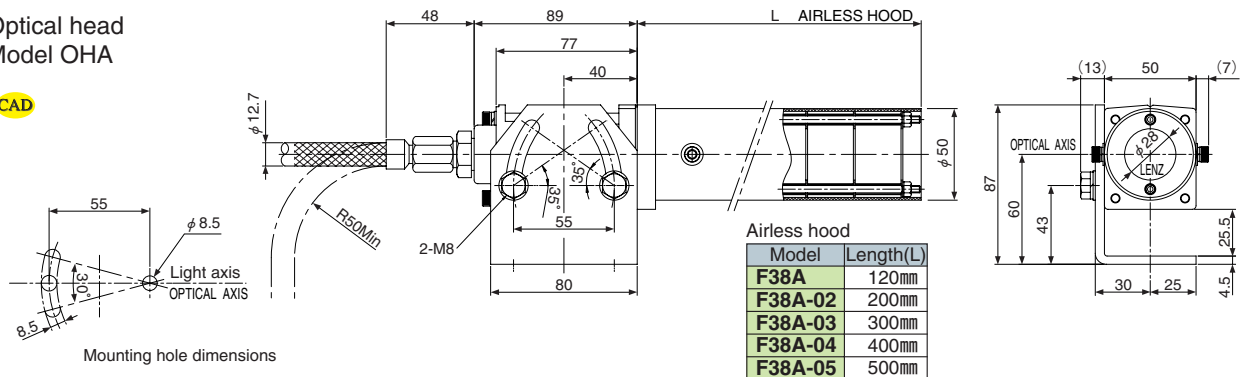


Optical head Model OHW1/OHW2  
Airless hood Model F38W

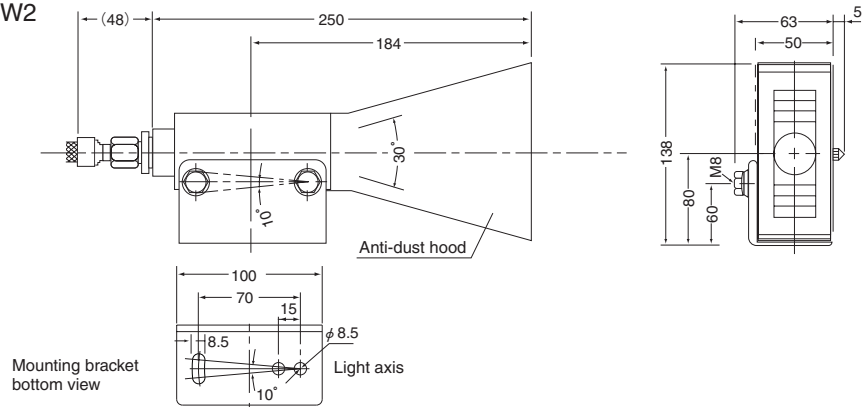

### Example of combination of Airless hood and optical head

Optical head  
Model OHA


CAD

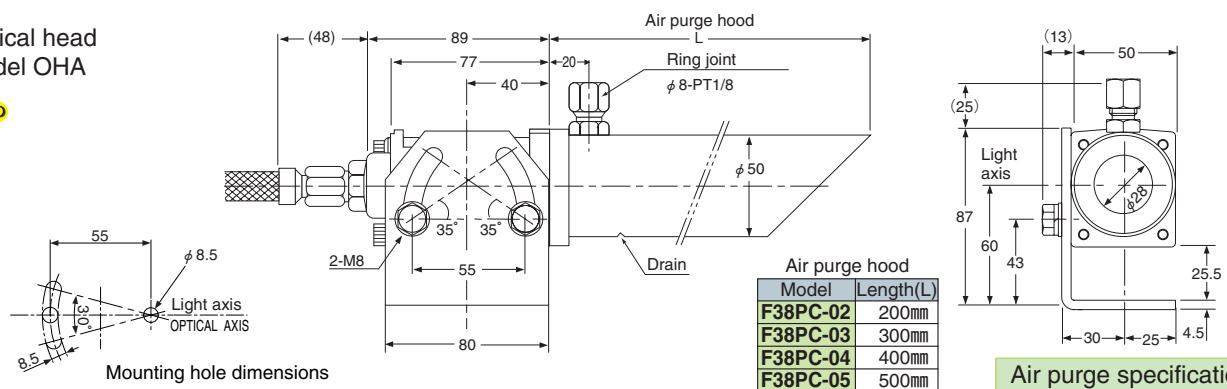

**Air purge specification**  
Flow rate ...200 l/min  
Withstand pressure ...0.98MPa


Optical head Model OHW1/OHW2  
Airless hood Model 302W

CAD

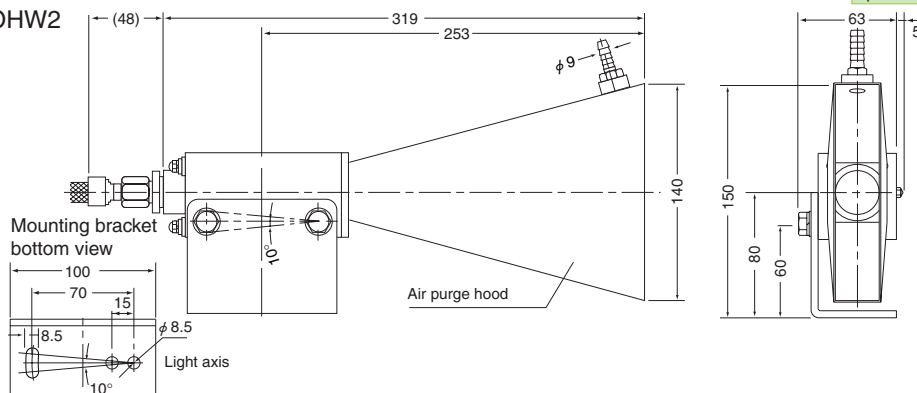

## 5-point level indicator facilitating light axis alignment Cooling unnecessary up to 200 °C

Model : FD300A (low temperature)  
Model : FD600A (medium/high temperature)

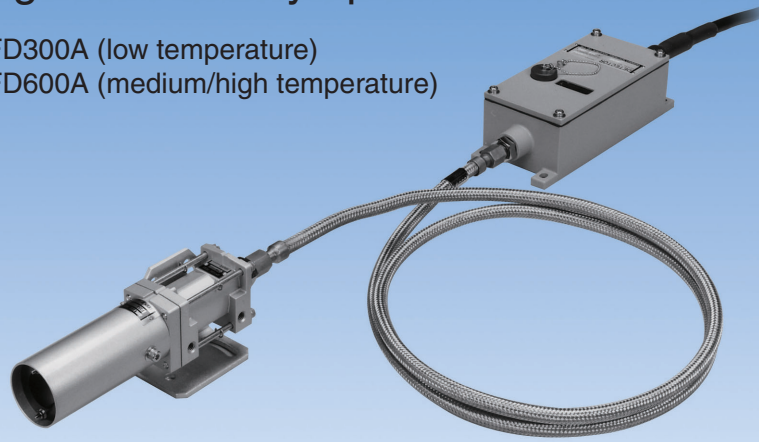

The optical head and amplifier are connected with a fiber optic cable and the infrared ray captured with the optical head is transmitted through highly transmissive glass fiber into an amplifier installed at a distant location. The infrared ray transmitted into the amplifier is optically converted in the light-sensitive element and amplified for control signal output (mini power relay, relay or Solid-state output).

Sensors for low temperature (FD300A Series) and medium/high temperature (FD600A Series) are available.

### ■ Features

- No cooling required  
The optical head integrating hood and optical lens and fiber have no electronic component, which allows use in ambient temperature of up to 200 °C without cooling.
- Excellent durability  
Reliable design with the hood and optical head made of metal, fiber optic cable covered with flexible stainless steel braid and metal-cased amplifier provides robustness and resistance to heat and corrosion.
- 5-point level indicator  
Received light intensity is indicated at 5 levels, offering easy viewing of stability.
- Self-check feature integrated (SAFETY feature)  
Operation can be checked with external signal. Stability check feature is provided, which outputs alarm signal (SAFETY ALARM) when there is not much margin in the received light intensity level at detection due to soiling of lens, light axis misalignment, etc. or external disturbing light or residual heat.

# FD300A·FD600A series

## Ordering Guide

The FD-300A/FD600A Series does not have set model Nos. Order by specifying the individual model Nos. of components. Models with marked with \*compose a set shown on the previous page.

### Example


For ordering sensor with the following properties:

- Temperature of detection object: 600 °C or higher
- Mini power relay output
- Fiber length: 2 m
- Standard-view
- Compact, lightweight
- Airless hood

Component	Model	Quantity
Hood	<b>F38A</b>	1
Optical head	<b>OHA</b>	1
Fiber	<b>FG2</b>	1
Amplifier	<b>FD600A</b>	1

## [Optical head]

- The standard and wide types have different optical systems. Detection field of view characteristics (Typical example)

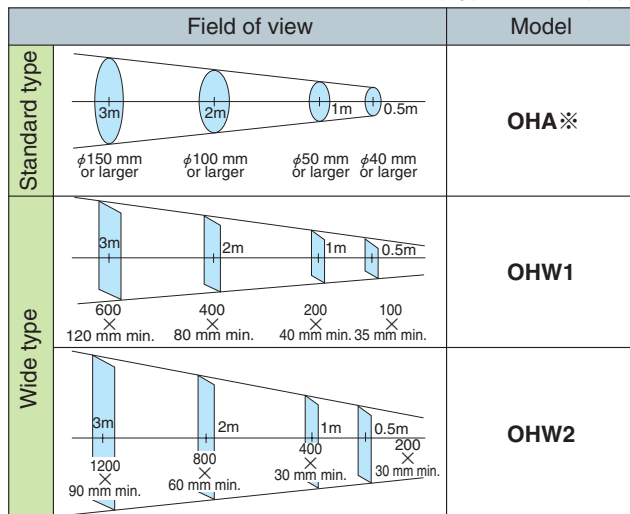

## [Amplifier]


- Select an amplifier based on the temperature of the detection object. The lowest detectable temperature varies depending on the fiber length. Temperatures shown in the table below are applicable only when the heated material (object) is larger than the detection field of view. If the material is smaller than the detection field, the lowest detectable temperature is increased. For detailed data, see “Minimum Detectable Object and Lowest Detectable Temperature.”

Type	Fiber length and detectable temperature				Applicable amplifier series	Output type	Model		
	Length	Model	Standard	Wide					
Low temperature	2m	<b>FG2</b>	360 °C or higher	425 °C or higher	FD300A series	Mini power relay output	<b>FD300A</b> ※		
	3m	<b>FG3</b>	375 °C or higher	440 °C or higher					
	4m	<b>FG4</b>	385 °C or higher	460 °C or higher					
	5m	<b>FG5</b>	395 °C or higher	465 °C or higher		Reed relay output	<b>FD300AH</b>		
	7m	<b>FG7</b>	415 °C or higher	485 °C or higher					
	10m	<b>FG10</b>	455 °C or higher	530 °C or higher					
	15m	<b>FG15</b>	490 °C or higher	570 °C or higher					
	20m	<b>FG20</b>	510 °C or higher	595 °C or higher					
30m	<b>FG30</b>	540 °C or higher	625 °C or higher	Solid-state output	<b>FD300AC</b>				
Medium/high temperature	2m	<b>FG2</b>	580 °C or higher			660 °C or higher	FD600A series	Mini power relay output	<b>FD600A</b>
	3m	<b>FG3</b>	580 °C or higher			660 °C or higher			
	4m	<b>FG4</b>	585 °C or higher			665 °C or higher			
	5m	<b>FG5</b>	585 °C or higher			670 °C or higher		Reed relay output	<b>FD600AH</b>
	7m	<b>FG7</b>	590 °C or higher			675 °C or higher			
	10m	<b>FG10</b>	595 °C or higher			680 °C or higher			
	15m	<b>FG15</b>	610 °C or higher	695 °C or higher					
	20m	<b>FG20</b>	620 °C or higher	710 °C or higher	Solid-state output	<b>FD600AC</b>			
30m	<b>FG30</b>	650 °C or higher	740 °C or higher						

## [Hood]

Type	Length	Model	Applicable optical head	
Airless hood	Standard-view	120mm	<b>F38A</b> ※	<b>OHA</b>
		200mm	<b>F38A-02</b>	
		300mm	<b>F38A-03</b>	
		400mm	<b>F38A-04</b>	
		500mm	<b>F38A-05</b>	
Airless hood	Wide-view	200mm	<b>F38W</b>	<b>OHW1</b> <b>OHW2</b>
		200mm	<b>F38PC-02</b>	<b>OHA</b>
Air purge hood	Standard-view	300mm	<b>F38PC-03</b>	
		400mm	<b>F38PC-04</b>	
		500mm	<b>F38PC-05</b>	
Air purge hood	Wide-view	—	<b>302W</b>	<b>OHW1</b> <b>OHW2</b>

## [Fiber optic cable]

Length	Model	Appearance (Typical example)
2m	<b>FG2</b> ※	
3m	<b>FG3</b>	
4m	<b>FG4</b>	
5m	<b>FG5</b>	
7m	<b>FG7</b>	
10m	<b>FG10</b>	
15m	<b>FG15</b>	
20m	<b>FG20</b>	
30m	<b>FG30</b>	

- Narrow-view optical head  
See P.491 for details

# FD300A·FD600A

## Rating/Performance/Specification/Environmental Specification


Output specification			
Model	FD-300A FD-600A	FD300AH FD600AH	FD300AC FD600AC
Output mode	Mini power relay output	Relay output	Solid-state output
Control output	On-OFF control (Light-ON)		
Rating	Transfer contact MAX 5A 250V AC (Resistance load)	Transfer contact MAX 0.5A 48V DC (Resistance load)	MAX 0.5A 250V AC/DC (Resistance load)
Response time	15ms max.	5ms max.	3ms max.
SAFETY ALARM output			
	Rating	a contact 5A 250V AC max. (Resistance load)	
General specification			
Valid lens diameter	28mm DIA (OHA)		
Power Supply	100 - 220VAC+10%, -15% 50/60Hz		
Power consumption	10W max.		
Connection	with Connector cable 2m (CVV1.25mm <sup>2</sup> )		
Ambient temperature	Optical head, Fiber: -25 to +200°C Amplifier: -25 +50°C (Non-freezing)		
Storage temperature range	-40 to +70°C (Non-condensing)		
Ambient humidity	35 to 85%RH Max. (Non-condensing)		
Fiber-optic unit allowable bending radius	50mm		
Insulation resistance	Between power supply and case: 500 VDC, 20 MΩ or higher		
	Between output and case: 500 VDC, 20 MΩ or higher		
	Between power supply and output: 500 VDC, 20 MΩ or higher		
	Operation check input: omitted		
Dielectric withstanding	Between power supply and case: 1500VAC for 1 minute		
	Between output and case: 1500VAC for 1 minute		
	Unless, Reed relay output: AC1000V for 1 minute		
	Between power supply and output: 1500VAC for 1 minute		
Unless, Reed relay output: AC1000V for 1 minute			
Operation check input: omitted			
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction		
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions		
Protective structure	IP66		
Weight	Optical head	Basic type (OHC): 680g Wide type (W1/W2): About 1300g	
	Airless hood	F38A : about 240g	F38A-03 : about 430g
		F38A-04 : about 550g	F38A-05 : about 650g
		F38W : about 600g	
	Air purge hood	F38PC-02 : about 240g	F38PC-03 : about 300g
F38PC-04 : about 370g		F38PC-05 : about 440g	
302W : about 600g			
Fiber	FG2 : about 0.7kg	FG3 : about 0.9g	FG4 : about 1.1kg
	FG5 : about 1.3kg	FG7 : about 1.6g	FG10 : about 2.1kg
	FG15 : about 3.1kg	FG20 : about 4.1g	FG30 : about 6.1kg
Amplifier	About 1.5kg		

## Input/Output Circuit and Connection


### • Control output

Model FD300A·FD600A

Model FD300AH·FD600AH




Model FD300AC·FD600AC



Saturation voltage: 3 V max.

### • SAFETY ALARM output (all models)



When connecting an inductive load such as relay as the load, be sure to use diode, surge absorber, etc. for protection of output transistor from back electromotive force

## Dimensions

The dimensions are the same with the FD-A300P Series.

See PP. 480-481.

## Configuration


Configuration and functions of components are the same with model FD-A300P.

See P. 475.



# FD300A·FD600A

## Amplifier panel layout (with case lid removed)

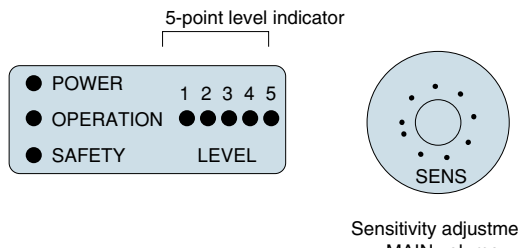

5-point level indicator

- POWER 1 2 3 4 5
- OPERATION ●●●●●
- SAFETY LEVEL

SENS

Sensitivity adjustment MAIN volume

Illuminated at power-up.  
 Operation indicator: illuminated when control output is activated.  
 Stability check indicator (safety indicator)  
 When there is not much margin in the received light intensity, SAFETY ALARM is output and the LED starts flashing.  
 Received light intensity is shown with an indicator with 5 LEDs, which are illuminated differently for the individual levels:  
 LEVEL 1: 1/2 of operation level  
 LEVEL 2: operation level  
 LEVEL 3: double the operation level ( $\pm 50\%$  variable)  
 LEVEL 4: triple the operation level  
 LEVEL 5: quadruple the operation level


illuminated

Sensitivity adjustment  
 Two volumes are provided: MAIN and SUB. Only the MAIN volume can be manually operated from outside.


## Control Output and Stability Check Feature

- ◇ Control output: obtained by detecting infrared radiation from heated material.
- ◇ Stability check feature (SAFETY ALARM output): self-check feature. When there have been several consecutive detections with received light intensity at light reception less than double the operation level or intensity at light blocking state more than 1/2 of the operation level, a level error signal is output to notify of unstable detection.  
 This check level of  $\times$ double the operation level $\bar{E}$  is variable within 50% by adjusting the internal volume.  
 This alarm output is automatically reset when the stable detection condition is restored.  
 The timing chart below shows variation of received light intensity level at each passage of heated material and output condition.

### Timing chart

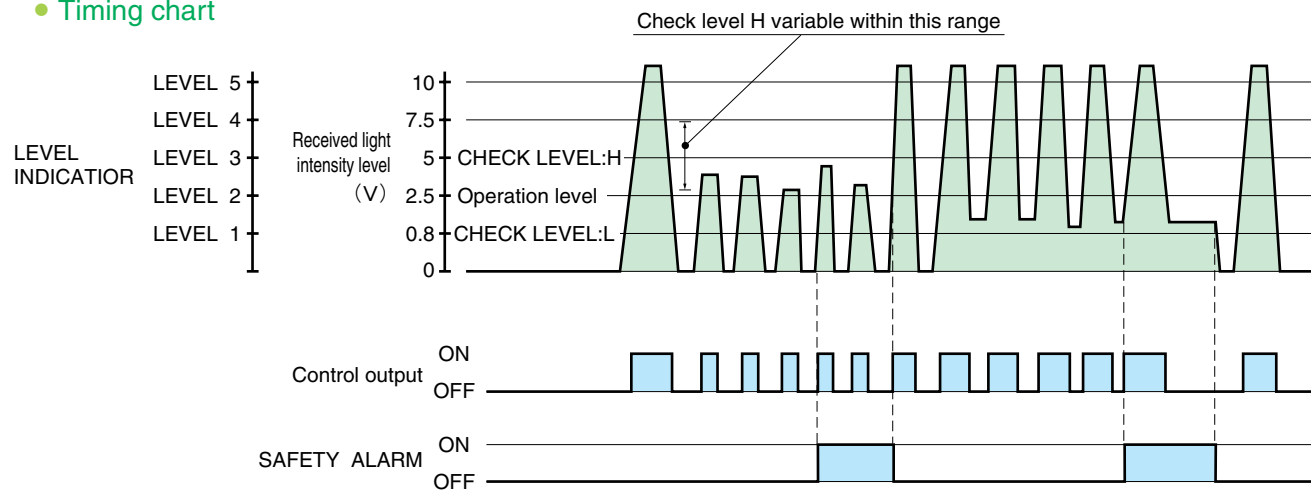

### Adjustment of SAFETY LEVEL for stability check

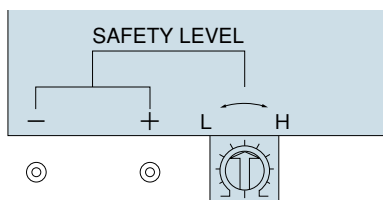


The volume is not provided on the surface.  
 Remove the case lid to access the volume for adjustment.

- SAFETY ALARM operation : The number of checks is set at 7, which means that seven consecutive unstable detections activate the SAFETY ALARM output.
- Operation check : The simulated light source in the detector is illuminated by external check signal to activate the detector.

# FD300A · FD600A

## Connection

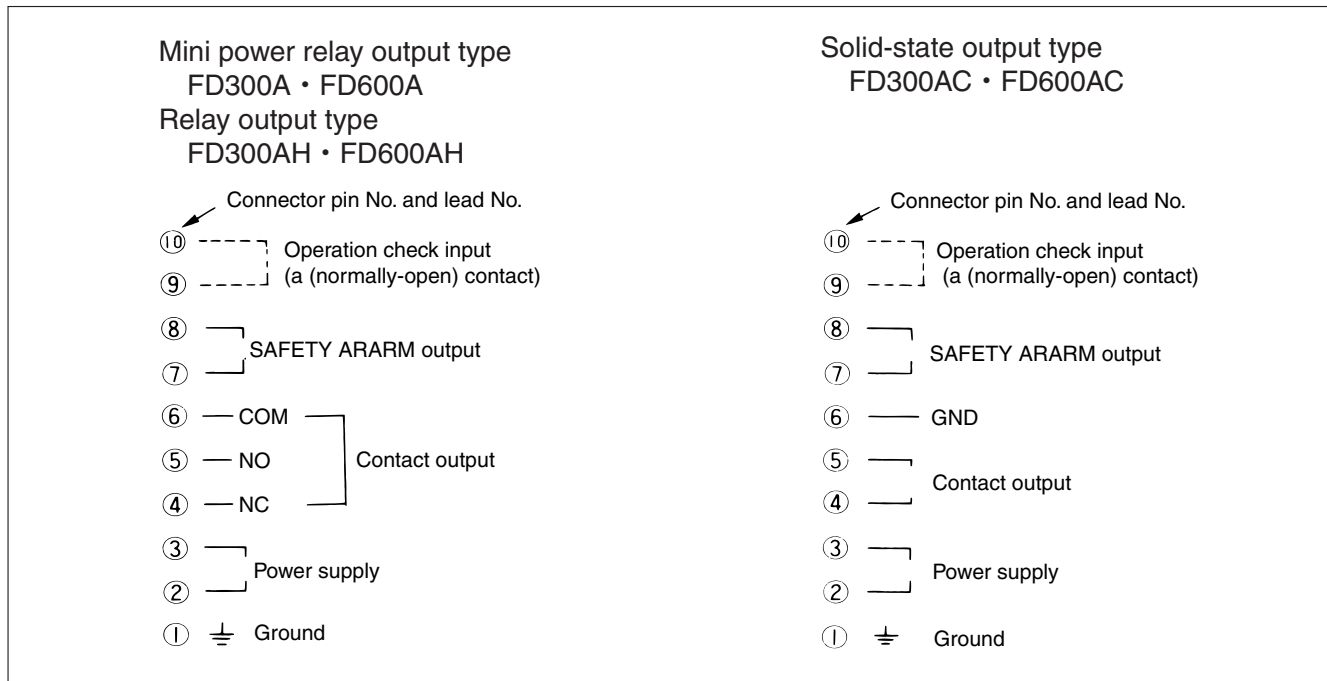


- When connecting an inductive load such as relay as the load, be sure to use diode, surge absorber, etc. for protection of output transistor from back electromotive force.

- When the leads are extended (100-300 m), stray capacitance between leads may cause rush current. If this poses any problem, provide a resistor (10-50 Ω) in series with the contact.

## Sensitivity adjustment

Two volumes are provided for sensitivity adjustment: MAIN and SUB.

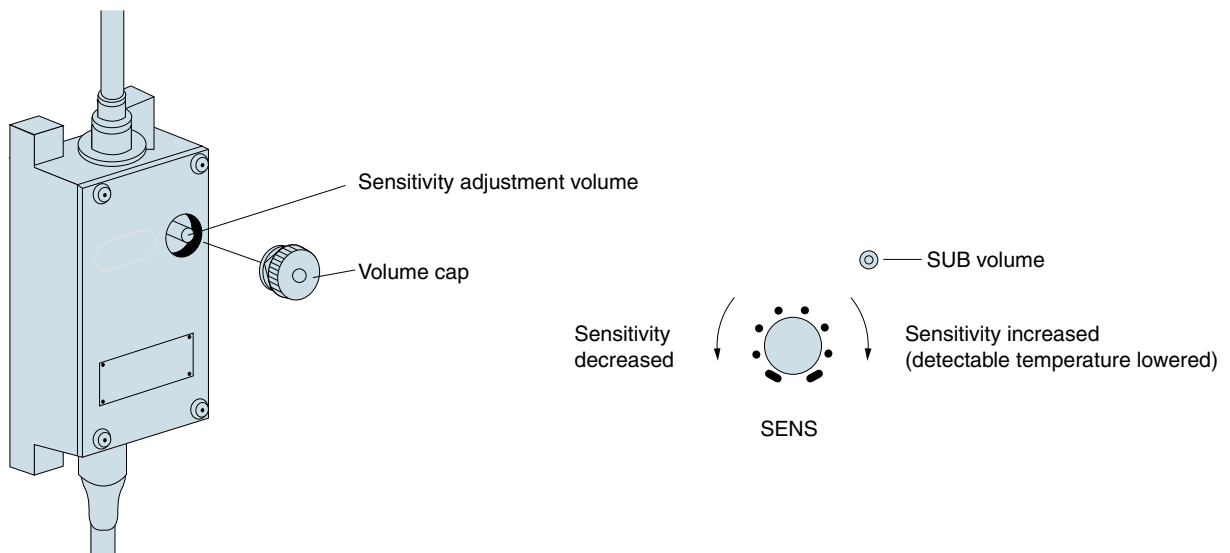

## Light Axis Alignment

Alignment with optical sight

Use the optical sight provided on the optical head.

Alignment with Light axis aligner - Light axis aligner is optionally available

See PP. 480 and 520 for details.

# FD300A · FD600A

## Minimum Detectable Object and Lowest Detectable Temperature

The graphs below may be used to find the relationship between the diameter of a detection object and its lowest detectable temperature.


- The minimum detectable object diameter means the width of a round or square bar or board with a length equal to or more than the field of view that may be detected at any point in the field of view.
- Using graphs

The graphs show data for a detecting distance of 1 m. For example, if a combination of amplifier FD300A, optical head OHA and fiber optic cable FG10 are used for detecting a round bar of 10 mm, the lowest detectable temperature is 590 °C according to the first graph.

For a detecting distance other than 1 m, use the following procedure to find the “coefficient” and multiply the reading on the Y-axis of the graph (detection object diameter) by the resulting coefficient [K].

For detection with (OHW1/OHW2) used as optical head and detecting distance of 1 m or shorter.  
Example : If OHW1 is used and the detecting distance is 0.7 m, the coefficient is 0.7.

Multiply the Y-axis readings of the graph by 0.7 to complete the replaced Y-axis scale.

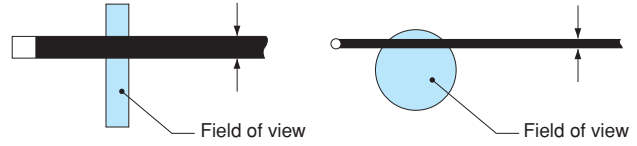

For detection with (OHA) used as optical head and detecting distance of 1 m or shorter  
Coefficient  $K = L + (0.6 - 0.6 \times L)$  (L = detecting distance (m))

Example : for detecting distance of 50 mm (L = 0.5)

$$K = 0.5 + (0.6 - 0.6 \times 0.5) = 0.8$$

The coefficient is 0.8. Multiply this by Y-axis reading of the graph (detection object diameter) :  $50 \times 0.8 = 40$

This means that the point for detection object diameter 50 mm must be regarded as the point for diameter 40 mm.


Multiply other values by the coefficient above in the same way and complete the replaced Y-axis scale.

For detecting distance of 1 m or longer (with any optical head model)


Use the distance as the coefficient.

Example: If the detecting distance is 2.5 m, the coefficient is 2.5. Multiply the Y-axis readings of the graph by 2.5 to complete the replaced Y-axis scale.


Amplifier	<b>FD300A</b>
Optical head	<b>OHA</b>

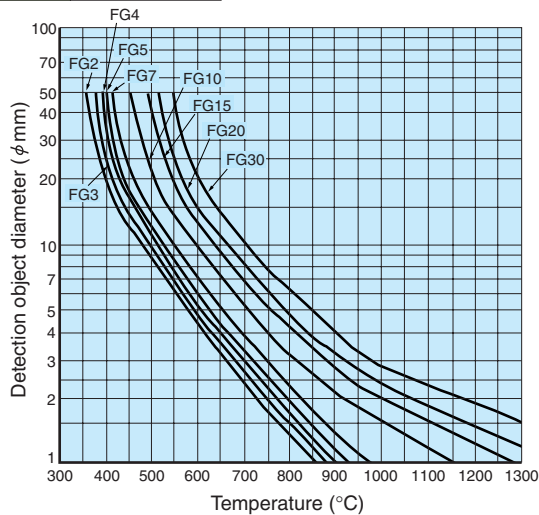


Amplifier	<b>FD600A</b>
Optical head	<b>OHA</b>

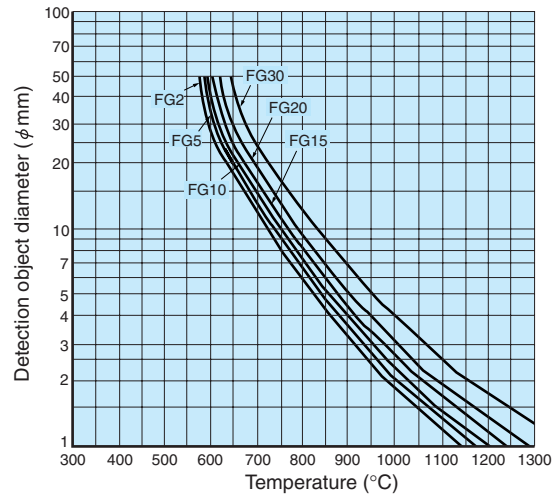

Amplifier	<b>FD300A</b>
Optical head	<b>OHW1/OHW2</b>

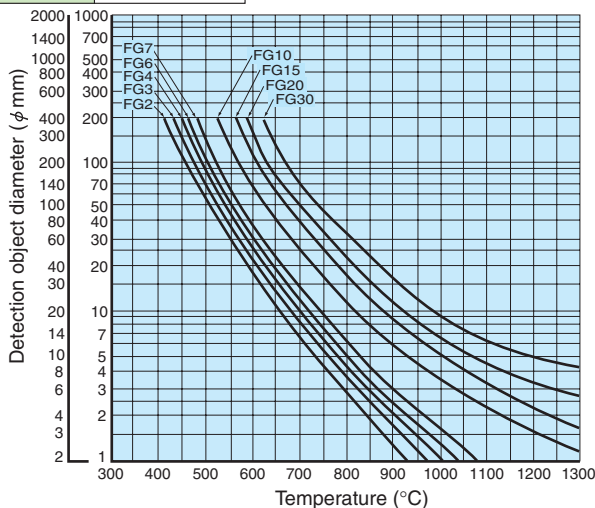

Amplifier	<b>FD600A</b>
Optical head	<b>OHW1/OHW2</b>

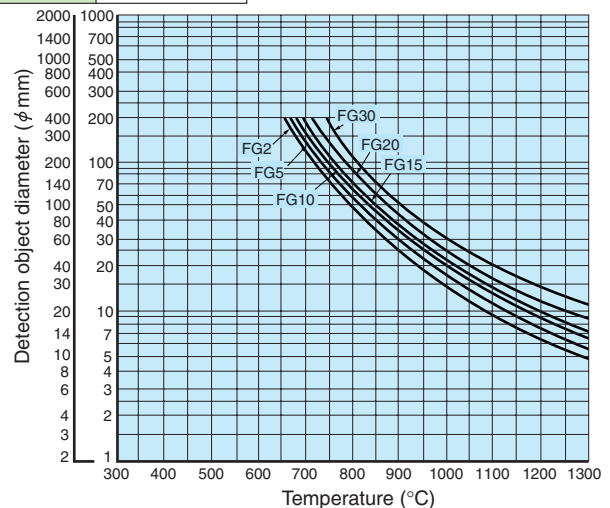

# FD-A310C series

Fiber type / HMD

Focus on basic functions for low cost



Amplifier  
Model:FD-A310C  
Model:FD-A310CM

Fiber optic cable  
(different models available)



Optical head  
Model : OHC

FD-A310 C series photo switches are hot metal detectors (HMDs) that directly detect infrared radiation from heated glass or steel.

Glass fiber optic cables with good heat resistance and transmission factor are used for detecting heads, which transmit the detected infrared rays to amplifiers that amplifies the signals for output.

Two output types are available: mini power relay output and photo-MOS relay output for AC/DC control.

- Compact, lightweight amplifier
- Flexible heat-resistant fiber optic cables

## Type/Price

Type	Model	Specification overview				
Amplifier	FD-A310C	Power supply : 100-220V AC	Output	Relay output		
	FD-A310CM			Photo-MOS relay output		
Fiber	GT205AD	Fiber length	Lowest detectable temperature (*)	0.5m	320°C	Heat resistance 200 °C, IP 67
	GT21AD			1m	330°C	
	GT22AD			2m	350°C	
	GT23AD			3m	370°C	
	GT25AD			5m	390°C	
	GT27AD			7m	410°C	
	GT210AD			10m	430°C	
Optical head	OHC	Heat resistance 200 °C, IP 67				

\*)These temperatures are inherent performance applicable when heated material is larger than the detecting field of view. For actual usage, consider at least 50 °C above these temperatures as guidelines. Heated material smaller than the field increases the lowest detectable temperature.

## Ordering Guide

The FD-A310C series does not have set model Nos. Order by specifying the individual model Nos. of components.

Component	Model	Quantity
Optical head	OHC	1
Fiber	GT205AD	1
Amplifier	FD-A310C	1


# FD-A310C

## Rating/Performance /Specification /Environmental Specification


Model	FD-A310C	FD-A310CM
Output mode	Relay output	Photo-MOS relay output
Control output	Light-ON/Dark-ON selector switch provided (DIP switch)	
Rating	Transfer contact MAX 5A 250V AC (Resistance load)	1a MAX 80mA 250V AC/DC (Resistance load) Saturation voltage = 1 V max.
Response time	10ms max.	5ms max
Light-sensitive element	Ge photodiode	
Sensitivity wavelength	0.8~1.8 $\mu$ m	
Sensitivity adjustment	10-position digital switch without stopper	
Indication	Power indicator (P.L), operation indicator (OP.L), received light intensity indicator: 3-point	
Power Supply	AC100~220V +10% -15% 50/60Hz	
Power consumption	5W Max.	
Connection	Connector type: cord length 2 m Cord: 0.75 x 5 mm <sup>2</sup> cores, (Outer dimension: dia. 4.5)	
Ambient temperature	Optical head, Fiber: -40 to +200°C Amplifier: -25 +50°C (Non-freezing)	
Storage temperature range	-40 to +70°C (Non-condensing)	
Ambient humidity	35 - 85%RH Max. (Non-condensing)	
Insulation resistance	500VDC 20M $\Omega$ or higher	
Dielectric withstanding	1500 VAC for 1 minute	
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction	
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions	
Protective structure	IP54	
Mass	About 950 g (including cord with connector)	

## Input/Output Circuit and Connection


Model FD-A310C (Relay output type)

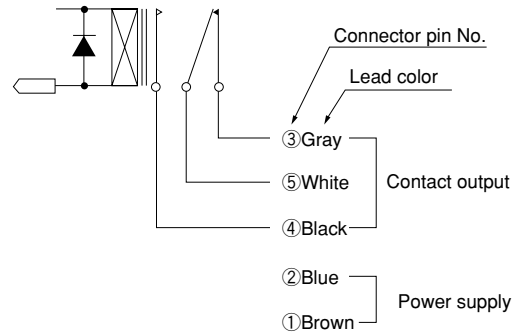


Model FD-A310C (Photo-MOS relay output type)

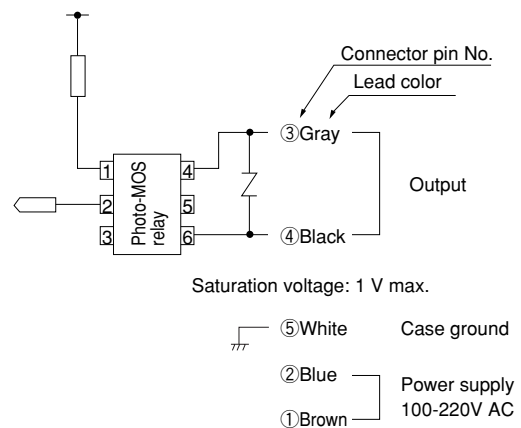

## Detection field of view (mm)

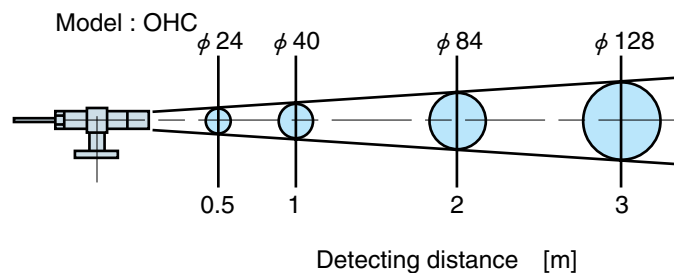


## Sample Applications

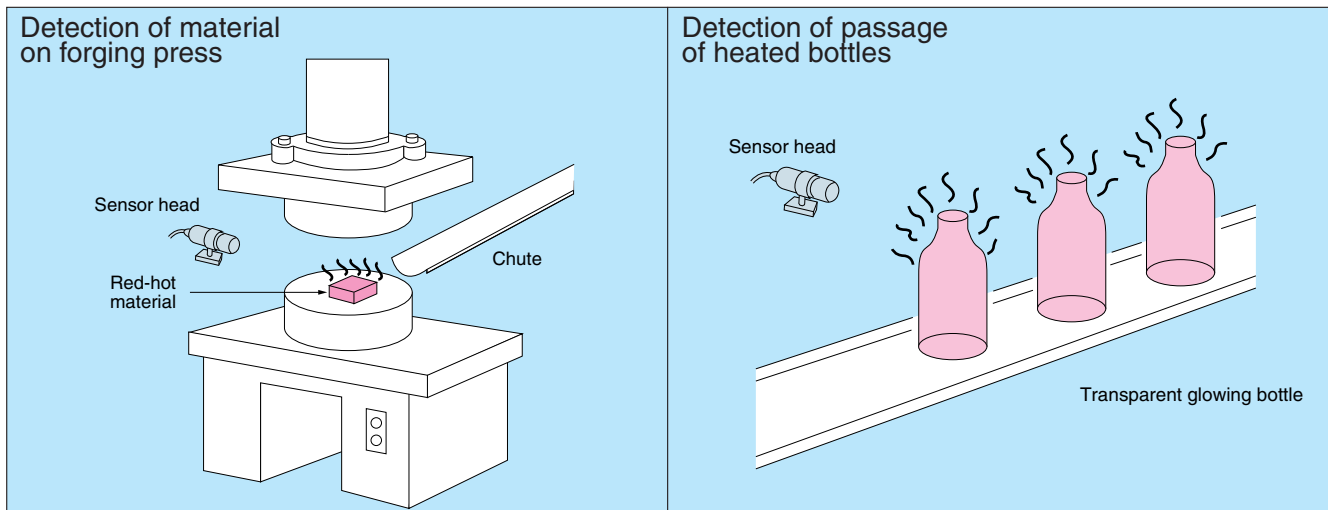


# FD-A310C

## Dimensions (in mm)

### Amplifier

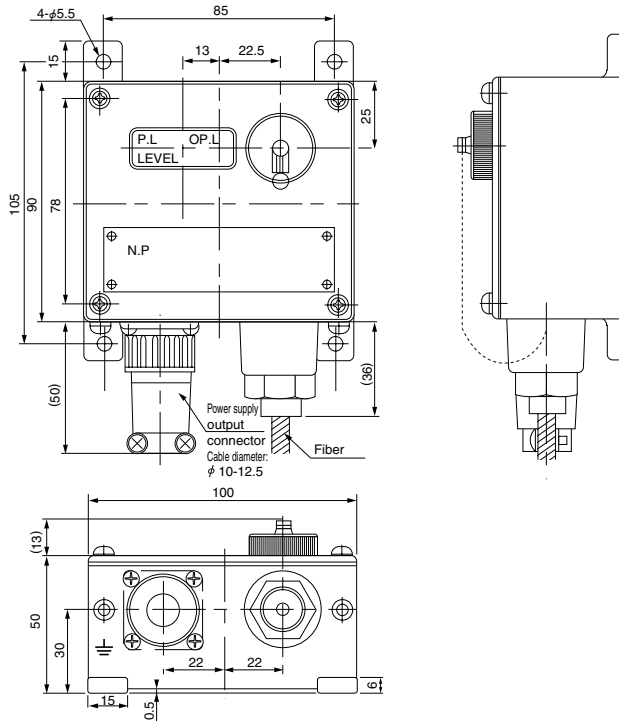


### Fiber

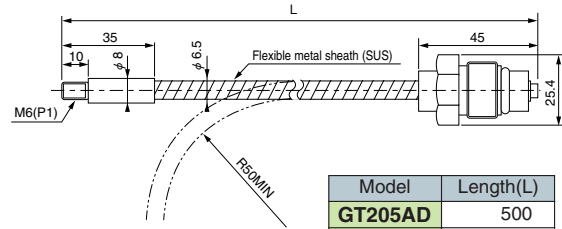

Model	Length(L)
GT205AD	500
GT21AD	1000
GT22AD	2000
GT23AD	3000
GT25AD	5000
GT27AD	7000
GT210AD	10000

(mm)

### Optical head

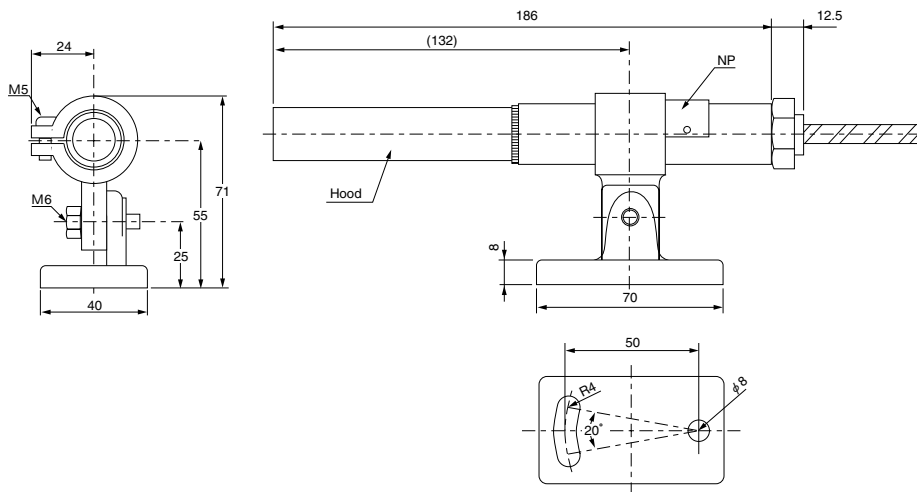

# Optical head


Fiber type / HMD




- Narrow-view optical head with dramatically improved detection position accuracy
- Parallel-view  
Model OHAN
- Spot-view  
Model OHAN10

## Detecting Distance and Detection Field of View

- Parallel-view (OHAN): narrow view regardless of detecting distance

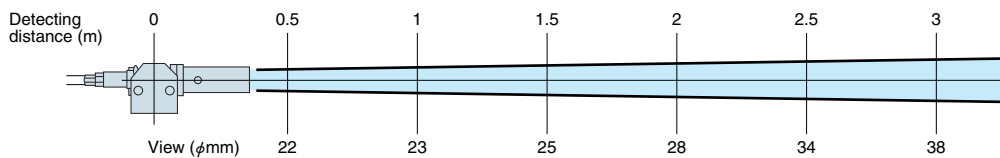

- Spot-view (OHAN10): even narrower view available at limited detecting distance

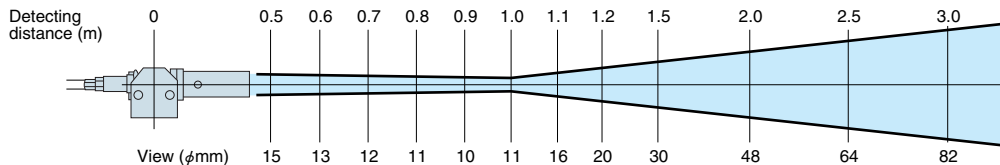


## Guidelines for Lowest Detectable Temperature (°C)

Fiber \ Amplifier	FFD-A300P series	FD-300A series	FD-600A series
FG2	480	490	750
FG3	500	510	750
FG4	515	525	755
FG5	530	540	760
FG7	550	560	770
FG10	600	610	775
FG20	665	680	820
FG30	705	720	860

The table shows the lowest detectable temperature of detection objects with combinations of different fiber optic cables and amplifiers. Use as guidelines only as temperatures may vary to some extent depending on the conditions.

## Dimensions (in mm; with Airless hood and fiber attached)

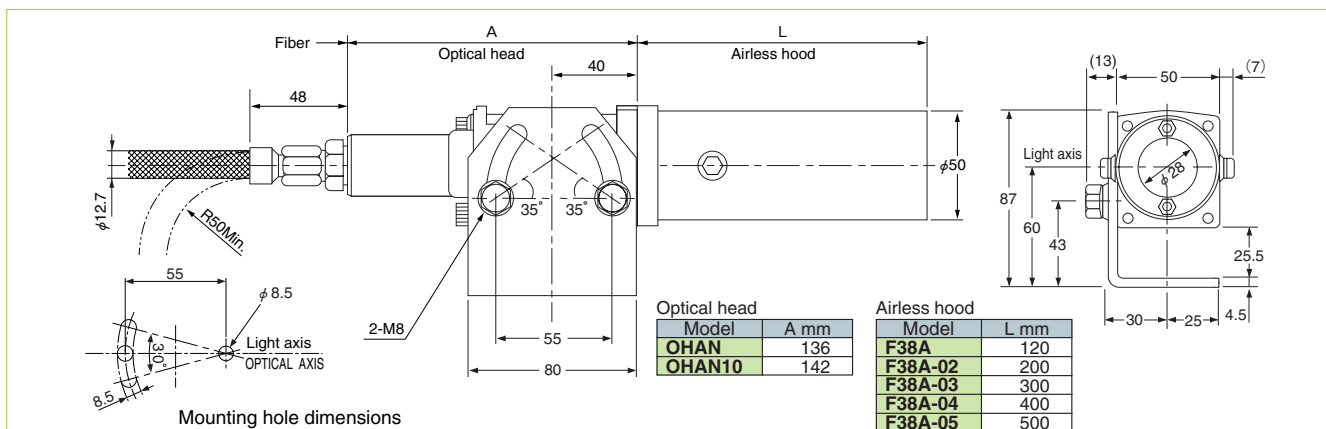

## Direct reading of analog voltage



Control unit

Unlike ordinary HMDs that detect radiation from heated material and output the presence of the material as a signal such as a relay contact, FD-A300AN Series sensors convert the radiation intensity from heated material into analog voltage.

The large analog dynamic range allows analog output of a wide range between low temperature of 350 °C and high temperature of 750 °C.

(The signal is not linearized with reference to temperature and the sensors cannot be used as thermometer.)

### Features

- Supports a wide range of temperature 350-750 °C (with fiber optic cable FG2)  
Attaching a pinhole plate to the optical head allows analog output ranging from 400 to 850 °C (OHA with  $\phi$  10 pinhole) or from 460 to 1,100 °C (OHA with  $\phi$  5 pinhole).
- Direct reading of analog voltage  
Output analog quantity is fed into the control unit, which displays the analog voltage.  
Setting a comparator at an arbitrary analog quantity provides output of relay contact or open collector output.  
Comparator setting corresponds to sensitivity adjustment of the conventional HMDs. With the FD-A300AN Series, viewing concrete figure of analog voltage facilitates setting.
- Dual comparators for a variety of applications  
The conventional HMDs had weaknesses such as low accuracy of detection position as in situations where high sensitivity to detect low-temperature material caused unwanted reflection with high-temperature material. The dual comparators for the FD-A300AN allow setting of one of the two for low temperature and the other for high temperature. On top of this, selection of output in agreement with the line conditions can increase the detection position accuracy.
- Use of insulating transformer (isolator) for long-distance transmission  
The output from the amplifier is voltage output of 0-10 V and use of a commercially-available insulating transformer allows long-distance transmission as a measurement signal of 4-20 mA.



# FD-A300AN

## Rating/Performance/ Specification/Environmental Specification


### ● Amplifier

Model	<b>FD-A300AN</b>
Detection method	Fiber type
Detection temperature analog range	350~750°C (with optical head OHA and fiber optic cable FG2)
Power Supply	AC100~220V ±10% 50/60Hz
Power consumption	10W Max.
Output mode	Voltage output: 0-10 V; output impedance: 10 kΩ Effective range: 1.0-10.0 V
Response time	5ms./Full
Indicator	5-point level indicator (yellow LED)
Case material	Aluminum die-cast
Connection	Connector type: cord length 2 m
Mass	About 1.5kg
Ambient temperature	-25 +50°C (Non-freezing)
Ambient humidity	35 - 85%RH (Non-condensing)
Protective structure	IP66

### ● Control unit

Model	<b>FD-C300AN</b>
Power Supply	AC100~220V ±10% 50/60Hz
Power consumption	10W max.
Input mode	Linear input: 0-10 V; input impedance: 10 kΩ
Comparator	2
Output type	2 relay contact 1c 250 VAC 3 A outputs (resistance load) 2 NPN open collector (photocoupler) 30 VDC 100 mA outputs
Response time	Relay contact output: 20 ms max. NPN open collector output: 1 ms
Input voltage display	Panel meter (LCD) display/ Character height: 12.7 mm
Indicator	POWER: power indicator (green LED) OUTPUT 1/2: output indicator (yellow LED) INPUT 1/2: panel meter switching (green LED)
Volume	2 comparator adjustment volumes: 4-turn
Switch	Panel meter switching Selectable between input voltage/comparator voltage 1 and 2
Connection	Terminal block
Mass	About 1kg
Ambient temperature	-25 +50°C (Non-freezing)
Ambient humidity	35 - 85%RH Max. (Non-condensing)

## Control Unit Panel Description

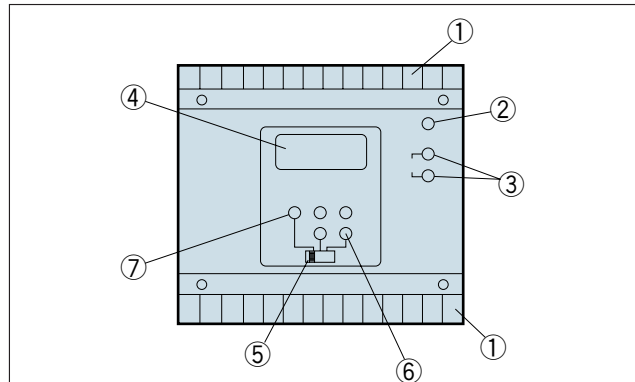


- (1) Terminal block, (2) Power indicator, (3) Output indicator  
(4) Panel meter  
(5) Panel meter switching

The panel meter usually shows the input voltage and individual comparator voltages can be shown by switching the display. For this reason, set the display at Comparator for adjusting comparator voltage and normally set at Input.

- (6) Comparator voltage adjustment, (7) Panel meter switching indicator

## Dimension(in mm)

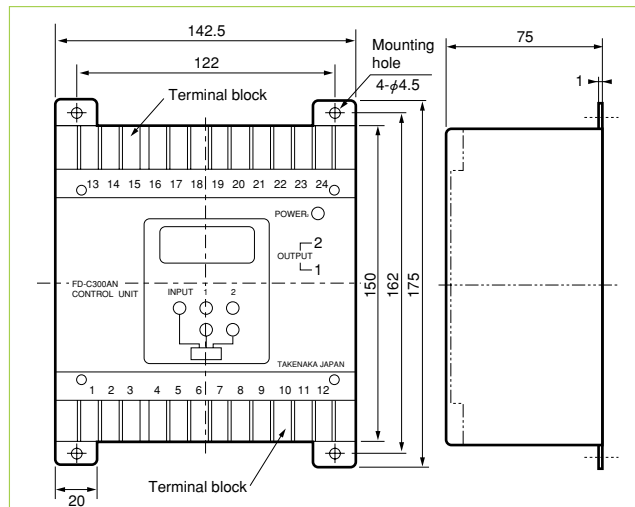


### ● Head


Hoods, optical head and fiber are the same with those for FD-A300P, etc. (See P. 492.)

## Connection

### Amplifier

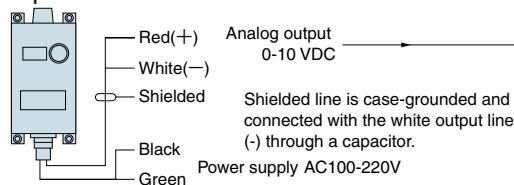

### Control unit

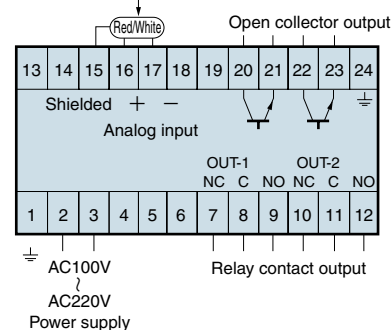

- Ideally, the amplifier and control unit should be installed in the same box. For separate installation, wiring should be several meters to several tens of meters in principle. For longer wiring of tens-to-hundreds of meters, use an instrument isolator. The length of a data transmission cable depends on the ambient noise and this information should only be used as guidelines.


Connect Terminal No. 1 to ground.

Do not connect anything to the unused terminals, which may be used for the circuitry.

# HMPD801-EX

Water-cooled heated material  
position detection sensor

CCD system delivers small size, light weight and long life.  
Provided with monitor and remote-controlled sensitivity adjustment.

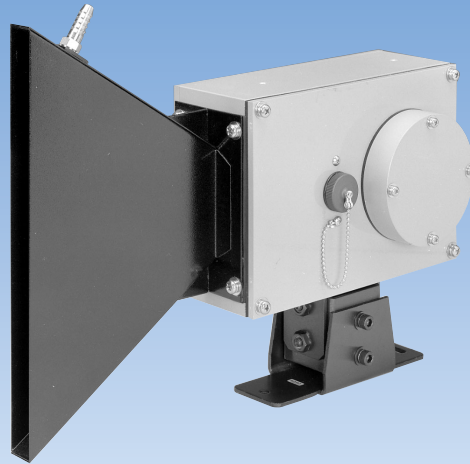


The HMPD801-EX Series senses infrared radiation from red-hot wire rod or bar steel and outputs the position of heated material in analog voltage. Ideal for loop control.

## Features

- Use of CCD system eliminates parts with limited service life such as motors of PBS cells, offering constantly stable detection and dramatic reduction of maintenance cost.
- External control for sensitivity switching and monitor output for remote observation of received light intensity and slice levels are provided.
- Easy-to-process static analog output eliminates the need for consideration of read timing, etc.
- Finder convenient for adjustment is integrated, facilitating positioning.
- Compact, lightweight and low cost.

## Sample Application

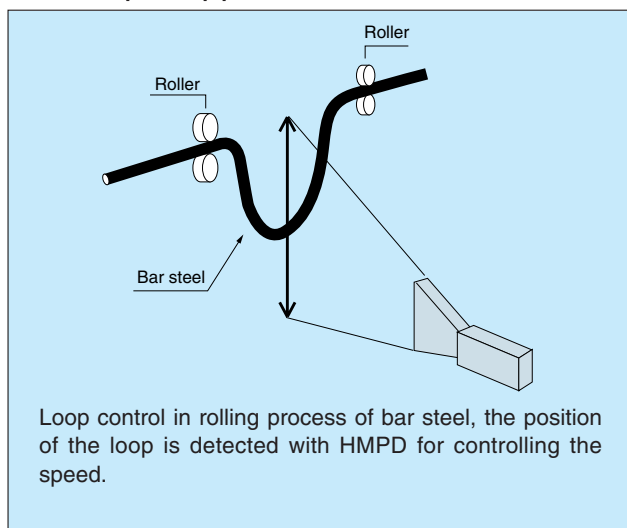

Loop control in rolling process of bar steel, the position of the loop is detected with HMPD for controlling the speed.

Contact Takex for detailed material data.

# HMPD801-EX

## Rating/Performance/ Specification/Environmental Specification


Model		HMPD801-EX	
Rating / Performance	Detection method	CCD scanning	
	Detectable temperature	800 °C min.	
	Detection field of view	800mm/1m	
	Resolution	Field of view x 1/256	
	Minimum detectable object diameter	Field of view x 2/256 min.	
	Power Supply	24VDC ±10% Ripple 10% max.	
	Current consumption	200mA max.	
	Output mode	Analog voltage rating	0-10 VDC ±5%, output impedance 4.7 kΩ
		Control output rating	2 NPN open collector outputs / Sink current 100 mA (30 VDC) max.
	Specification	Operation mode	(voltage output in proportion to position of radiation)
Response speed		10ms	
Indicator		Power indicator (green LED), operation indicator (red LED) for presence of material 1 and 2	
Adjustment feature		Self-check switch, external sensing control	
Monitoring feature		Video monitor output, slicing timing output	
Material		Case: aluminum / Lens: glass	
Connection		Connector (twisted pair cable 5 m)	
Mass		About 5kg	
Ambient light		500 lx max.	
Environmental specification		Ambient temperature	-10 - +55 °C (non-freezing, non-condensing) / +80 °C max. with water-cooling
	Ambient humidity	35-85%RH (anti-moisture coated)	
	Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction	
	Protective structure	IP66	

## Connection


Pin No.	Lead color	Description
1	Red/purple	Power supply 24 VDC
2	White/white	0V
3	Black	Analog output 0-10 VDC
	White	Analog output 0 V
4	Green	Material present 1 30 VDC 100 mA
5	White	Material present 1 0 V
6	Blue	Material present 2 30 VDC 100 mA
7	White	Material present 2 0 V
8	Yellow	External check
9	White	External check 0 V
10	Brown	Video monitor output Video 0 V
14	White	Video 0 V
11	Pink	Slice, timing monitor output
	White	Slice
12	Pale blue	Sensing 1
15	White	Sensing 1 0 V
13	Orange	Sensing 2
16	White	Sensing 2 0 V

For Steel & Heavy Industries


## Input/Output Circuit

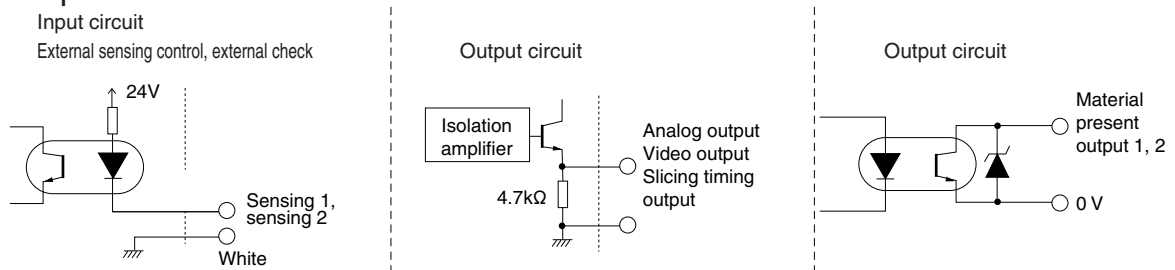

## Dimension(in mm)

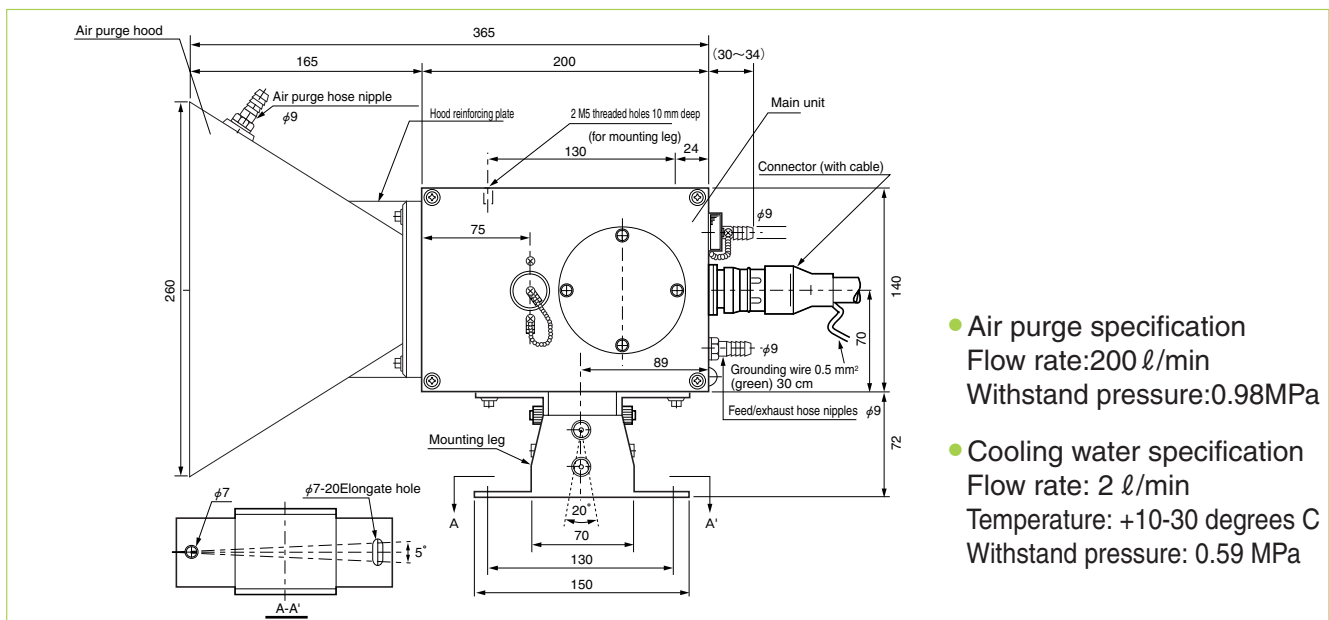


Lowest detectable temperature: 150°C



Model KD150C

KD150C is extremely compact and low-cost for amplifier-integrated water-cooled sensors. KD150C directly detects infrared radiation and outputs ON-OFF signals, which is useful for applications such as detection of passage or position of red-hot steel materials including ingots, slabs, steel plates and mold steel.

- Detection field of view  
Model: KD150C

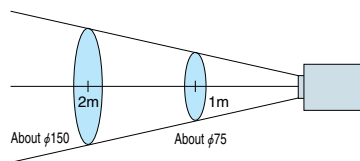

- Without hood
- Detection object larger than detection field

## Features

- Water-cooled  
KD150C is the smallest of water-cooled sensors with built-in amplifiers and enclosed in robust case that withstands severe operating conditions.
- Reasonable cost  
High performance allows detection of low-temperature (150°C min.) steel material. Streamlined design offers even more reasonable price.
- Performance comparable to full-size HMDs  
Long detecting distance, sensitivity adjustment feature and high sensitivity offer excellent stability.
- Attachable airless dust hood or air purge hood  
For the prevention of dirt deposits on lens, dust hoods that do not require air (F38S, F38N) and air purge hoods (302NC-305NC) are available.

## Rating/Performance/ Specification/ Environmental Specification

Model	KD150C
Detection method	Radiation detection
Power Supply	12-24VDC $\pm 10\%$
Current consumption	20 mA max
Output mode	<ul style="list-style-type: none"> <li>Open collector output Rating: 100 mA (30 VDC) max. Hysteresis: about 2 °C</li> <li>Analog output Op-amp voltage output 0-3 V (3 V at 300 °C)</li> </ul>
Detection object temperature	150 °C min. (iron oxide)
Effective lens diameter	$\phi 28\text{mm}$
Response time	0.5s
Indicator	Operation indicator (red LED)
Sensitivity adjustment	Adjustable with volume
Ambient temperature	10 +55°C (Non-freezing)/ 180 °C max. with water-cooling
Ambient humidity	35 - 85%RH max. (Non-condensing)
Storage temperature	-20 +65°C. (Non-condensing)
Protective structure	IP66
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction
Dielectric withstanding	AC 500V for 1 minute
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions
Insulation resistance	250 VDC, 20 M $\Omega$ or higher
Case material	Aluminum die-cast (cord opening ground hub)
Connection	Terminal block
Mass	About 2kg

### • Cooling water specification


Flow rate	2 l/minute min.
Temperature	+10~+35°C
Withstand voltage	0.29MPa

### • Air purge specification (with optional part)

Flow rate	200 l/minute min.
Withstand voltage	0.98MPa


Air not required for use of airless dust hood.

## Connection

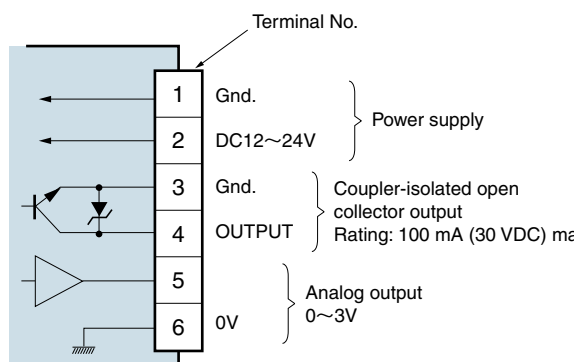


Note) The open collector output is isolated from power supply. The analog output "0" and "0" of power supply have different potentials.

## Dimensions(in mm)

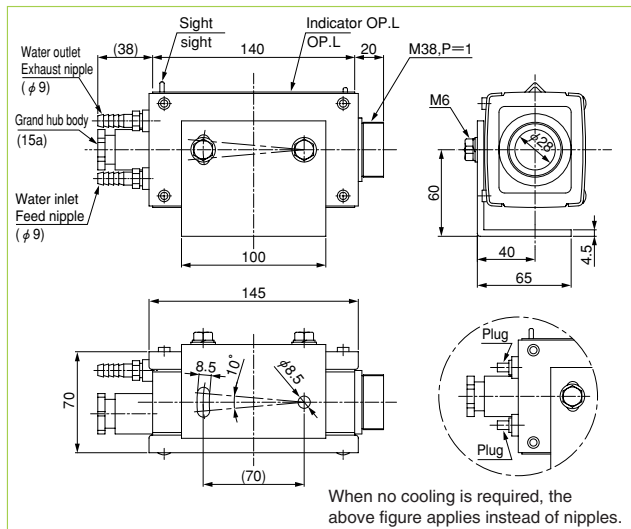


### • With Airless hood F38S Series attached

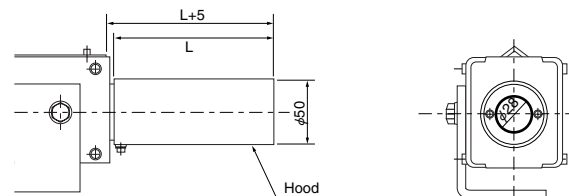


Model	Length (L)
F38S	120mm
F38S-03	300mm
F38S-04	400mm
F38S-05	500mm

### • With Airless hood F38N Series attached

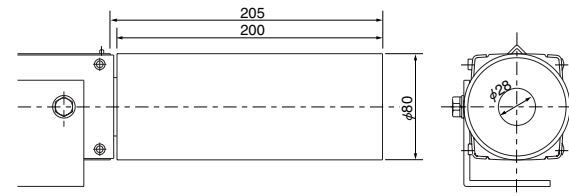


### • With air purge hood attached

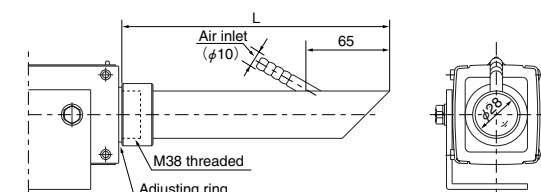

Model	Length (L)
302NC	215mm
303NC	315mm
304NC	415mm
305NC	515mm

Inexpensive  
Reliably detects low-temperature (450°C min.) steel material



Narrow-view type  
Model KD50 (relay output)  
KD50E (voltage output)




Wide-view type  
Model KD50W (relay output)  
KD50EW (voltage output)

For Steel & Heavy industries


The KD50 Series HMDs are extremely compact and low-cost for an amplifier-integrated water-cooled sensors. The KD50 Series sensors directly detect infrared radiation and output ON-OFF signals, which is useful for applications such as detection of passage or position of red-hot steel materials including ingots, slabs, steel plates and mold steel.

• Detection field of view

Narrow-view type

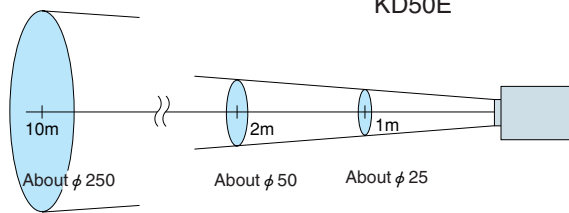

Wide-view type

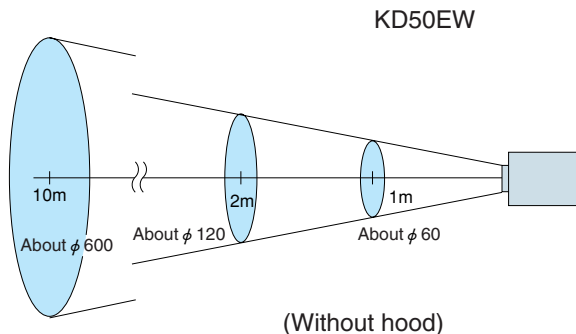

## Features

- Water-cooled  
The KD50 Series sensors are the smallest of water-cooled sensors with built-in amplifiers and are enclosed in a robust case that withstands severe operating conditions.
- Narrow-view and wide-view types available  
Choice between narrow-view and wide-view types allows selection according to installation conditions, etc.
- Reasonable Cost  
High performance allows detection of low-temperature (450 °C min.) steel material. Streamlined design offers even more reasonable price.
- Performance comparable to full-size HMDs  
Long detecting distance, sensitivity adjustment feature and high sensitivity offer excellent stability
- Airless dust hood or air purge hood attachable  
Prevents dirt deposits on lens, dust hoods that do not require air (F38S, F38N) and air purge hoods (302NC-305NC) are available.

Contact Takex for detailed material data.

## Rating/Performance/ Specification/ Environmental Specification

Model	KD50	KD50W	KD50E	KD50EW
Detection method	Radiation detection			
Power Supply	AC100~110V/200~220V ±10% 50/60Hz			
Power consumption	4W max.			
Operation mode	Light-ON			
Output mode	Relay output		Voltage output	
	Rating 1 transfer contact 200 VAC 0.5 A resistance load		10VDC 5mA	
Detection object temperature	450 °C min. (ordinary steel material)			
Response time	25ms max.		5ms max.	
Indicator	Light reception indicator (red LED)			
Sensitivity adjustment	Adjustable with volume			
Ambient temperature	-10 - +55 °C (150 °C max. with water-cooling)			
Ambient humidity	35-85%RH (non-freezing, non-condensing)			
Insulation resistance	500 VDC, 20 M <sub>Ω</sub> or higher (between primary side of transformer/output terminal and case)			
Dielectric withstanding	1.5 kVAC for 1 minute (between primary side of transformer/output terminal and case)			
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction			
Shock	500 m/s <sup>2</sup> / twice each in 3 directions			
Protective structure	IP66			
Case material	Aluminum die-cast (cord opening ground hub)			
Connection	Terminal block			
Mass	About 2kg			

### ● Cooling water specification

Flow rate	2R/minute min.
Temperature	+10~+35°C
Withstand voltage	0.29MPa


### ● Air purge specification (with optional part)

Flow rate	200R/minute min.
Withstand voltage	0.98MPa


Air not required for use of airless dust hood.

## Connection


### Relay output type

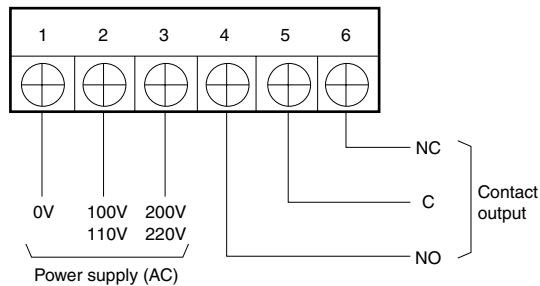

### Voltage output type

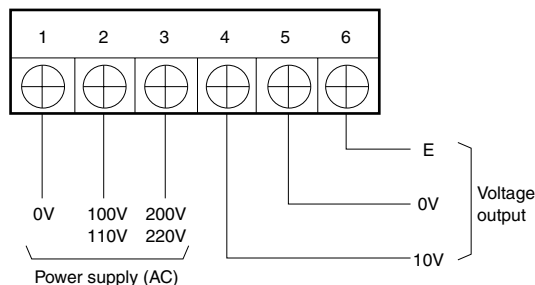


## Dimensions (in mm)

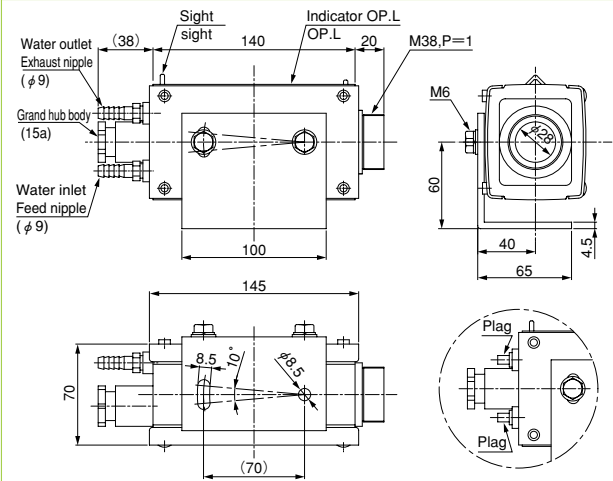


When no cooling is required, the above figure applies instead of nipples.

### ● With Airless hood F38S Series attached

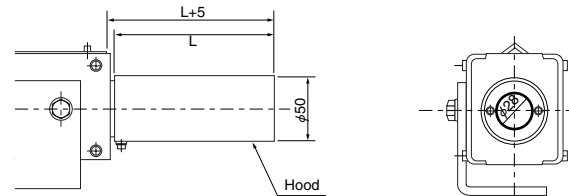


Model	Length (L)
F38S	120mm
F38S-03	300mm
F38S-04	400mm
F38S-05	500mm

### ● With Airless hood F38N Series attached

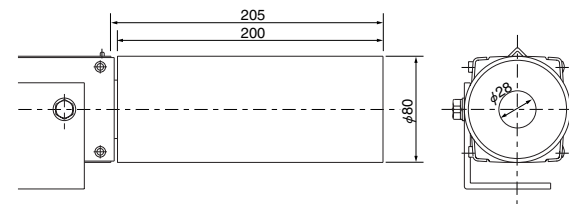

### ● With air purge hood attached

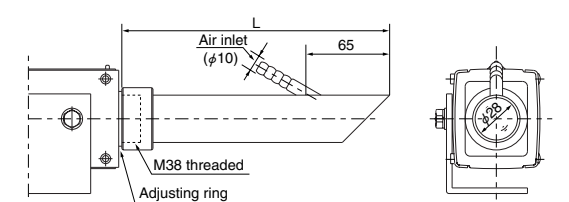

Model	Length (L)
302NC	215mm
303NC	315mm
304NC	415mm
305NC	515mm

Low-temperature model: 350 °C min.  
Medium/high temperature model: 650 °C min.

Medium/high temperature model: 430°C min. (with HD400 + GT205)  
560 °C min. (HD502F)



Model HD301 (low temperature)  
Model HD601 (Medium/high temperature)

Amplifier



Model HDA300



Model HD400

Lens unit



Model FA51

Model FA52



Model HD502F

The HD Series HMDs are radiation detection photo sensors with separate amplifiers that have achieved compact sizes and low cost.

HD301 and 601 are intended for sites where temperature in the vicinity of the receiver is up to 50 or 70 °C and available in models for low temperature and medium/high temperature. Applications include detection of presence or passage of heated steel material, glass, etc.

HD400 and 502F are optical fiber type sensors with ultra-small heads.

Applications include detection of heated steel material, glass, etc.

• Ordering guide (for HD400 Series)

A set is composed of an amplifier, receiver and fiber optic cable unit and there is no set No. Order by specifying the individual model Nos. of components as shown below:

Type	Model	Quantity
Amplifier	HDA300	1
Receiver	HD400	1
1-m fiber	GT21	1

## Features

- Low-cost  
The HD Series offers the lowest cost of all HMDs. Amplifiers are separately installed and no water-cooling is involved.
- Airless hood provided  
The HD Series sensors come with Airless hood for prevention of soiling of lens.
- Fiber type  
HD 400 may be used in combination with heat-resistant generic fiber optic cables, which improves the resistance to heat and electric safety of the sensing head. Attaching a lens unit at the end extends the detecting distance.  
HD502F is the lowest-cost model of HMD. The fiber optic cable covered with ø1.1 stainless tube allows focused detection of heated condition of electronic components or mechanical parts.

### Compact multifunctional amplifier (HDA300)

- 3-point level indicator  
The received light intensity level is shown by flashing 3 indicators for easy checking of stability.
- Sensitivity adjustment volume
- Relay output and voltage output available



## Rating/Performance/ Specification/ Environmental Specification

Type		Cord connection type		Fiber detachable type				Permanently attached fiber type
Model	Fiber (length)	—————		GT205 (50cm)	GT21 (1m)	GT22 (2m)	GT23 (3m)	70mm fixed
	Sensor	HD301 (low temperature model)	HD601 (medium/high temperature model)	HD400				HD502F
	Amplifier	HDA300						
Detection object temperature		350°C min.	650 °C min.	430°C min.	440°C min.	460°C min.	490°C min.	560°C min.
Output mode		Relay contact output/voltage output						
Rating		Relay contact output: 1c 250 VAC 5 A (resistance load) Voltage output 12 VDC 5 mA max.						
Operation mode		Light-ON (activated for presence of material) Timer operation selectable/external gating						
Timer		On-delay, off-delay, one-shot, timer disabled (ON/OFF)						
Time		Selectable between 0.1-1 s and 1-10 s						
Response time		Relay contact output: 25 ms; voltage output: 3 ms						
Power supply		AC100/110V · AC200/220V±10%, 50/60Hz						
Power consumption		5VA max.						
Connection	Amplifier	(screw diameter 3.5 mm)						
	Sensor	Two 0.5 mm <sup>2</sup> shielded cords 20 m					One 0.3 mm <sup>2</sup> shielded cord 2 m	
Ambient temperature (non-freezing)	Amplifier	-10~+50°C						
	Sensor	-25~+50°C	-25~+70°C	-25~+50°C				
	Fiber	—————		-20~+200°C			(Fiber tip: maximum + 70 °C)	
Ambient humidity (non-condensing)	Amplifier	35~85%RH						
	Sensor	35~95%RH			35~85%RH			
	Fiber	—————		95%RH max. (20%RH max. for 70 °C or higher)				
Insulation resistance	Amplifier	DC 500 V 20MΩ min. *1					Omitted (case-grounded)	
	Sensor	DC 500 V 20MΩ min.					Omitted (case-grounded)	
Dielectric withstanding	Amplifier	1500V AC for 1 minute *1					Omitted (case-grounded)	
	Sensor	1500V AC for 1 minute					Omitted (case-grounded)	
Vibration		10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction						
Shock		500 m/s <sup>2</sup> / 3 times each in 3 directions (twice for sensor)						
Protective structure	Amplifier	IP40						
	Sensor	IP66		IP40			IP66	
Mass	Amplifier	About 450 g (including socket)						
	Sensor	1500 g max. (including cord)		1100 g max. (including cord)			50 g max. (including cord)	
	Fiber	—————		110 g max.	190 g max.	350 g max.	530 g max.	
Fiber allowable bending radius		—————		R50			10 mm (except for 15 mm from the tip)	
Fiber material (covering)		—————		Glass (stainless steel spiral tube)			Glass (annealed stainless steel tube)	

\*1 Between case and grounding terminal (No. 1)

Between case and relay contacts (collective)

Between grounding terminal (No. 1) and relay contacts (collective)

Between case and entire power supply

Between grounding terminal (No. 1) and entire power supply

Between entire power supply and relay contacts (collective)


## Detection Field of View Characteristics (Typical example)

### • Cord connection type

Model HD301 (low temperature)

Model HD601 (high temperature)


HD301 : About φ 30 About φ 70 About φ 140 About φ 210  
HD601 : About φ 25 About φ 50 About φ 100 About φ 150

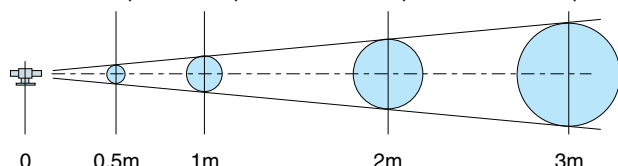


### • Fiber type

Model HD400


Model HD502F

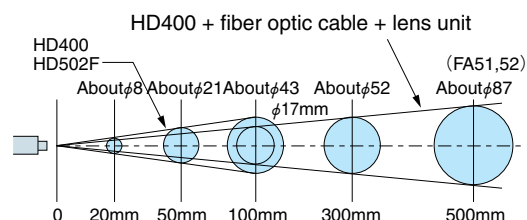

## Amplifier panel layout (HDA300)

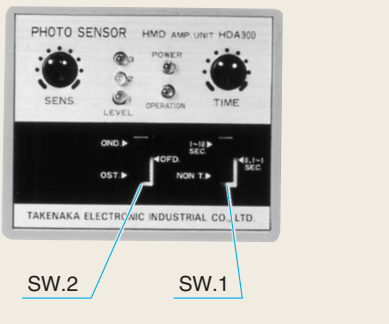	<b>SENS</b>	<b>Sensitivity adjustment volume</b> Turning clockwise increases the sensitivity and decreases the minimum detectable temperature.
	<b>LEVEL</b>	<b>Level indicator</b> Received light intensity is shown with 3 LEDs, which are illuminated differently for the individual levels: <b>LEVEL 1:</b> operation level <b>LEVEL 2:</b> double the operation level <b>LEVEL 3:</b> 3.5 times as much as the operation level
	<b>POWER OPERATION TIME</b>	<b>Illuminated at power-up.</b> <b>Operation indicator:</b> illuminated when control output is activated.
	<b>SW.1</b>	<b>Delay time adjustment</b>
	<b>SW.2</b>	<b>Delay time range selection and timer enabled/disabled</b> <b>Time limit operation selector switch</b>

## Connection

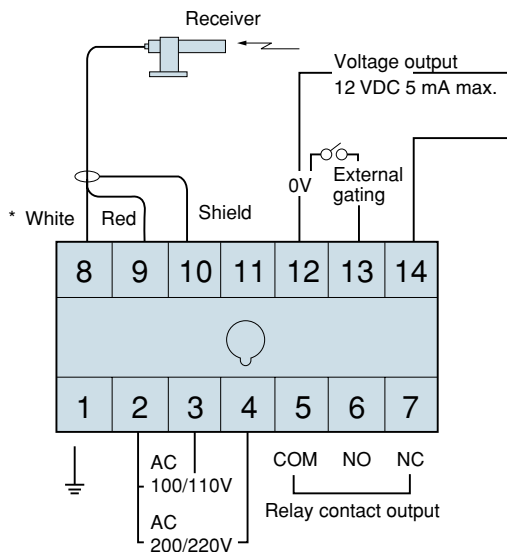


\*Only red and shielded lines for HD502F.

1. Be sure to limit the length of the receiver cord within the length of the provided cord (20 m) and route separately from power supply lines. Extension of the cord or insecure connection of the shielded line may cause induction, which may lead to faulty operation
2. Be sure to connect the grounding terminal. Failure to ground may cause faulty operation due to induction.
3. Terminals Nos. 12 and 13 are for external gating. Short-circuiting these terminals disables the internal circuit (output). Provide contact or open collector for operation. When not using external gating leave the terminals open.


## Dimension (in mm)

### Lens unit

Model·FA51

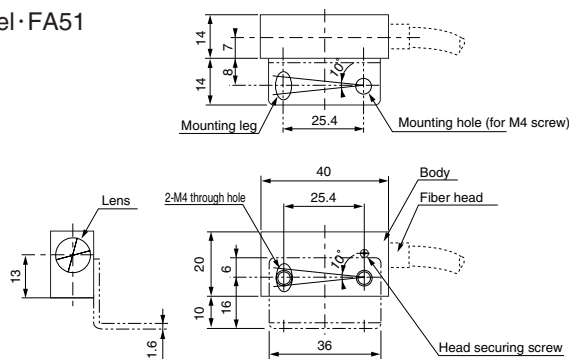


Model·FA52

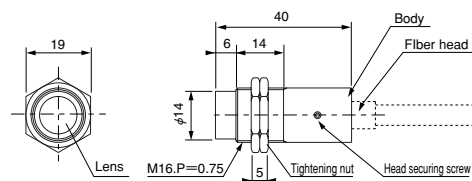


## Dimension (in mm)


### (Sensor) model HD301/601

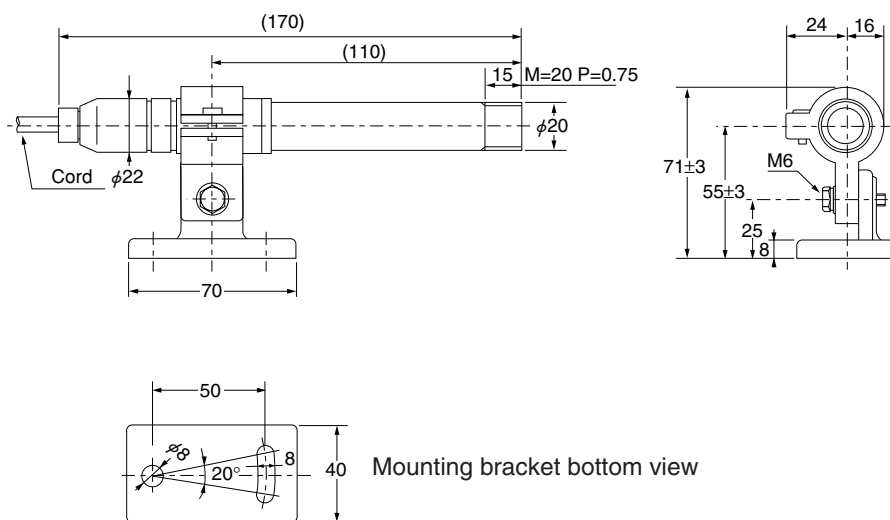

### (Sensor) model HD400

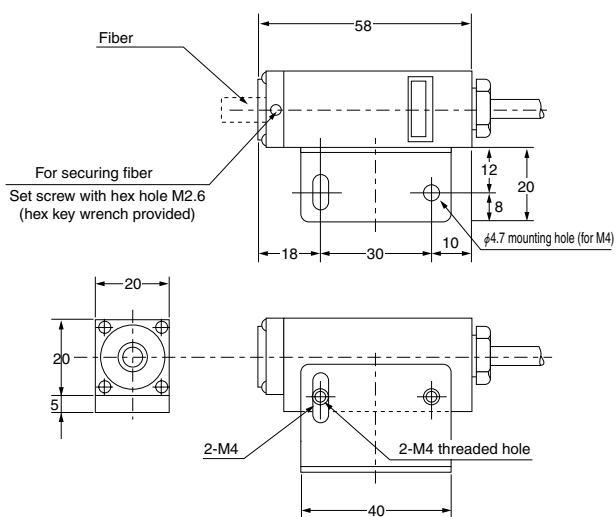


### (Fiber) GT series

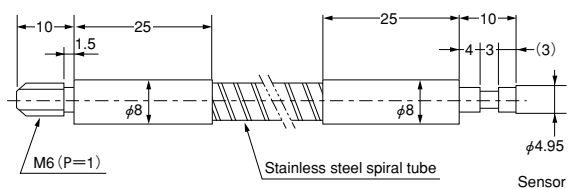


Model	Length
GT205	500mm
GT21	1m
GT22	2m
GT23	3m

### (Sensor) model HD502F

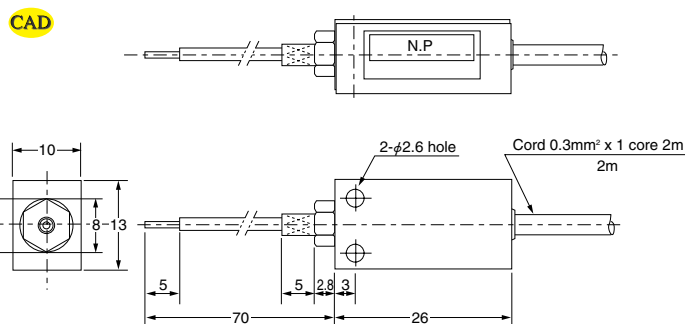


### (Amplifier) model HDA300

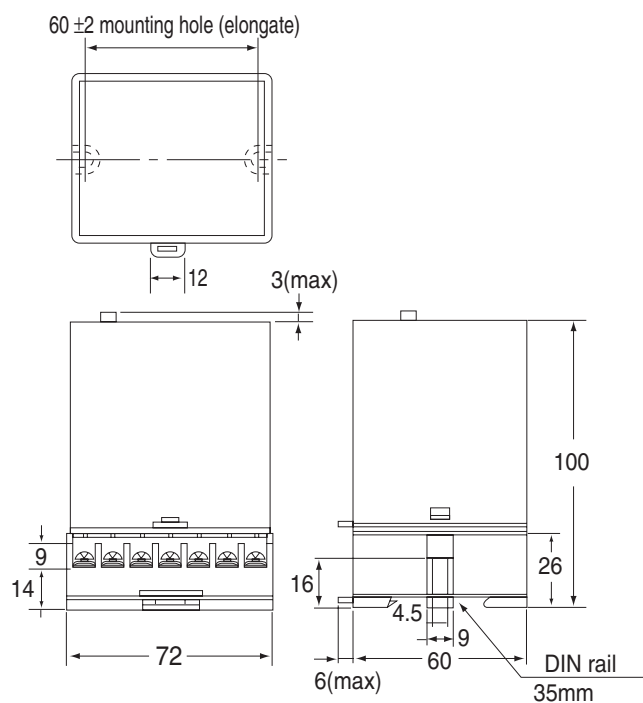

## High-powered Laser sensor

Over 3,000 times more powerful than LED

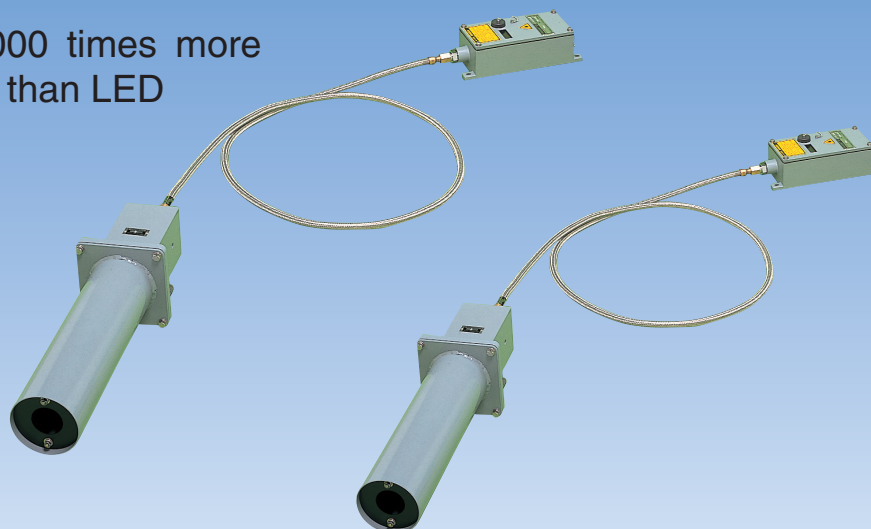

For basic information about semiconductor laser, see P540)

### Features

- High-powered output 90 W (FTL44A)  
Laser diode of optical output 90 W is used as the light source, over 3,000 times as high-powered as LED type (of Takex). The output of model FTL441A is 10 W.
- No cooling required  
Supports ambient temperature of up to 200°C without cooling.
- Detector with superb durability  
Fiber covered with flexible tube with stainless steel braid for robustness and resistance to heat and corrosion.
- Self-check feature integrated (SAFETY feature)  
The transmitter is provided with light emission monitor circuit, which outputs alarm signal (SAFETY ALARM) when light emission stops due to failure, etc. The receiver is provided with a stability check feature, which constantly checks the received light intensity at light reception and outputs error signal (SAFETY ALARM) when there is not much margin in the received light intensity level due to soiling of lens, light axis misalignment, etc.
- 5-point level indicator  
Received light intensity is shown with 5 LEDs, offering easy viewing of stability and facilitating light axis alignment.

### Notes on Safety

- Laser emission warning lamp  
The transmitter panel of the standard model is provided with power and light emission indicators to indicate that laser beam is emitted while power indicator or both indicators are illuminated.
- Do not attempt to look into the laser beam emitter or touch the beam.
- Take measures to prevent any unexpected specular reflection of laser beam caused by mirror-like detection object or mirror-like object crossing the route of the laser beam.
- Do not direct light to human body or use the sensor to detect people.
- Take safety measures according to the operation manual.

## Ordering Guide



The FT44A Series does not have set model Nos.  
Order by specifying the individual model Nos. of components.  
Models marked with \* compose a set shown on the previous page.

### Example


- Optical power 90 W
- Mini power relay output
- Fiber length : 2 m
- Airless hood

Component		Model	Quantity
Amplifier	Transmitter	<b>FTL44A</b>	1
	Receiver	<b>FTR44A</b>	1
Optical head		<b>OH2</b>	2
Fiber		<b>FG2</b>	2
Hood		<b>F70N</b>	2

## [Optical head]

Model	Compatible hood	Appearance
<b>OH2</b> ※	F70N 700L series	 (High-powered)
<b>OHA</b>	F38A series F38PC series	 (Standard)

## [Fiber]

Length	Model	Appearance (Typical example)
2m	<b>FG2</b> ※	
3m	<b>FG3</b>	
4m	<b>FG4</b>	
5m	<b>FG5</b>	
7m	<b>FG7</b>	
10m	<b>FG10</b>	
15m	<b>FG15</b>	
20m	<b>FG20</b>	
30m	<b>FG30</b>	


## Configuration

- Hood  
Prevent dirt deposits on optical lens head. Choice between airless and air purge hoods is available.
- Fiber optic cable  
Light guide for transmitter/receiver. Flexible tube with stainless steel braided covering.
- Optical head  
Optical unit for securing the detection light axis for transmitter/receiver. Standard and high-powered types (margin in operation tenfold) are available.
- Amplifier (transmitter)  
Integrates laser diode used as the light source, electronic circuitry for transmission, etc.
- Amplifier (receiver)  
Converts the light transmitted through fiber optic cable with (light-sensitive element) into electric signals for control output (mini power relay output, reed relay output or Solid-state output) via electronic circuitry.





Components for transmitter and receiver are the same except for amplifiers.

## [Amplifier]

Type	Model	Appearance (Typical example)
Transmitter amplifier	90W type	<b>FTL44A</b> ※
	10W type	<b>FTL441A</b>
Receiver amplifier	Mini power relay output	<b>FTR44A</b> ※
	Relay output	<b>FTR44AH</b>
	Solid-state output	<b>FTR44AC</b>



## [Hood]

Type	Length	Model/shape (Typical example)	Compatible optical head	
Airless hood	Standard type		<b>OHA</b>	
		120mm		<b>F38A</b>
		200mm		<b>F38A-02</b>
		300mm		<b>F38A-03</b>
		400mm		<b>F38A-04</b>
	500mm	<b>F38A-05</b>		
High-powered type			<b>OH2</b>	
		<b>F70N</b> ※		
Air purge hood	Standard type		<b>OHA</b>	
		200mm		<b>F38PC-02</b>
		300mm		<b>F38PC-03</b>
		400mm		<b>F38PC-04</b>
		500mm		<b>F38PC-05</b>
	High-powered type			<b>OH2</b>
		200mm	<b>702L</b>	
		300mm	<b>703L</b>	
		400mm	<b>704L</b>	
		500mm	<b>705L</b>	

# FT44A


## Rating/Performance/Specification/Environmental Specification

Output specification				
Transmitter model	<b>FTL44A · FTL441A</b>			
Monitor output (operation)				
	Rating	Contact output 5A 250V AC max. (Resistance load)		
Receiver model	<b>FTR44A      FTR44AH      FTR44AC</b>			
Output mode	Mini power relay output      Relay output      Solid-state output			
Control output	ON-OFF operation (Light-ON)			
Rating	Transfer contact	5 A 250 VAC max. (resistance load)	0.5 A 48 VDC max. (resistance load)	0.5 A 250 VAC/DC (resistance load)
	Response time	25 ms max.	12 ms max.	10 ms max.
Safety Alarm output				
	Rating	a contact 5A 250VAC max. (resistance load)		
General specification				
Light source	FTL44A: semiconductor laser 904 nm, 90 W max. JIS C 6802 Class 1M) FTL441A: semiconductor laser 904 nm, 10 W max. JIS C 6802 Class 1)			
Detecting distance	50 m max.			
Valid lens diameter	Optical head OHA: 28 mm Optical head OH2: 56 mm			
Smallest detectable object	Optical head OHA: 30 mm Optical head OH2: 60 mm			
Power Supply	100-220 VAC rated voltage -20%/+10%, 50/60 Hz			
Power consumption	Transmitter: 10 W max.; receiver: 10 W max.			
Connection	with Connector cable 2m (CVV 0.75mm <sup>2</sup> )			
Ambient temperature	Optical head, Fiber: -25 to +200°C Amplifier: -25 +55°C (Non-freezing)			
Storage temperature	-40 to +70°C (Non-condensing)			
Ambient humidity	35 to 85%RH (Non-condensing)			
Fiber-optic unit allowable bending radius	50mm			
Insulation resistance	Between power supply and case: 500 VDC, 20 MΩ or higher			
	Between output and case: 500 VDC, 20 MΩ or higher			
	Between power supply and output: 500 VDC, 20 MΩ or higher			
Dielectric withstanding	Between power supply and case: 1500VAC for 1 minute			
	Between output and case: 1500VAC for 1 minute (between reed relay outputs: 1,000 VAC for 1 minute) Between power supply and output: 1500VAC for 1 minute (between reed relay outputs: 1,000 VAC for 1 minute)			
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction			
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions			
Protective structure	IP66			
Mass	Optical head	OHC: About 680g / OH <sup>2</sup> : About 2.5kg		
	Airless hood	F38S : about 240g      F38S-03 : about 430g F38S-04 : about 550g      F38S-05 : about 650g F70N : about 1.8kg		
	Air purge hood	F38PC-02 : about 240g      F38PC-03 : about 300g F38PC-04 : about 370g      F38PC-05 : about 440g 703L : about 3.3kg		
	Fiber	FG2 : about 0.7kg      FG3 : about 0.9kg      FG4 : about 1.1kg FG5 : about 1.3kg      FG7 : about 1.6kg      FG10: about 2.1kg FG15: about 3.1kg      FG20 : about 4.1kg      FG30: about 6.1kg		
	Amplifier	Transmitter: about 1.5 kg; receiver: about 1.5 kg		


## Input/Output

### Circuit and Connection

- Control output
- Model FTR44A
- Model FTR44AH




Model FTR44AC




Saturation voltage: 3 V max.

- SAFETY ALARM OUTPUT (all models)



When connecting an inductive load such as a relay for the load, be sure to use diode, surge absorber, etc. for protection of output transistor from back electromotive force.

## Amplifier panel layout

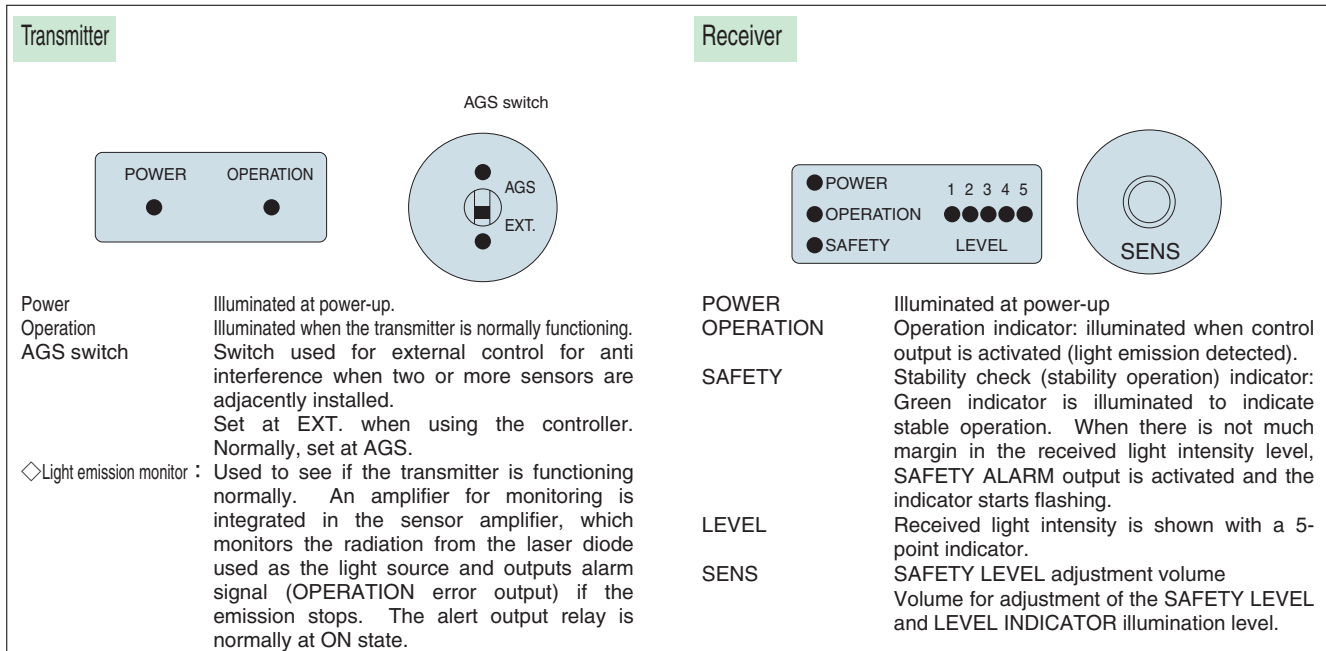


## Control Output and Stability Check Feature

**Control output :** Relay is activated when the light from the transmitter is detected by the output receiver.  
Relay is deactivated when the light from the transmitter is blocked by the detected object.

**Stability check feature (SAFETY ALARM output)**

**Operation :** The light intensity level (stability) at light reception is observed and an alarm signal is output when the light intensity is equal to or below the SAFETY LEVEL due to dirt deposits on lens or light axis misalignment, etc.  
The SAFETY LEVEL is variable between 200 and 1,500 times as much as the operation level. The output is reset when the received light intensity exceeds the SAFETY LEVEL.

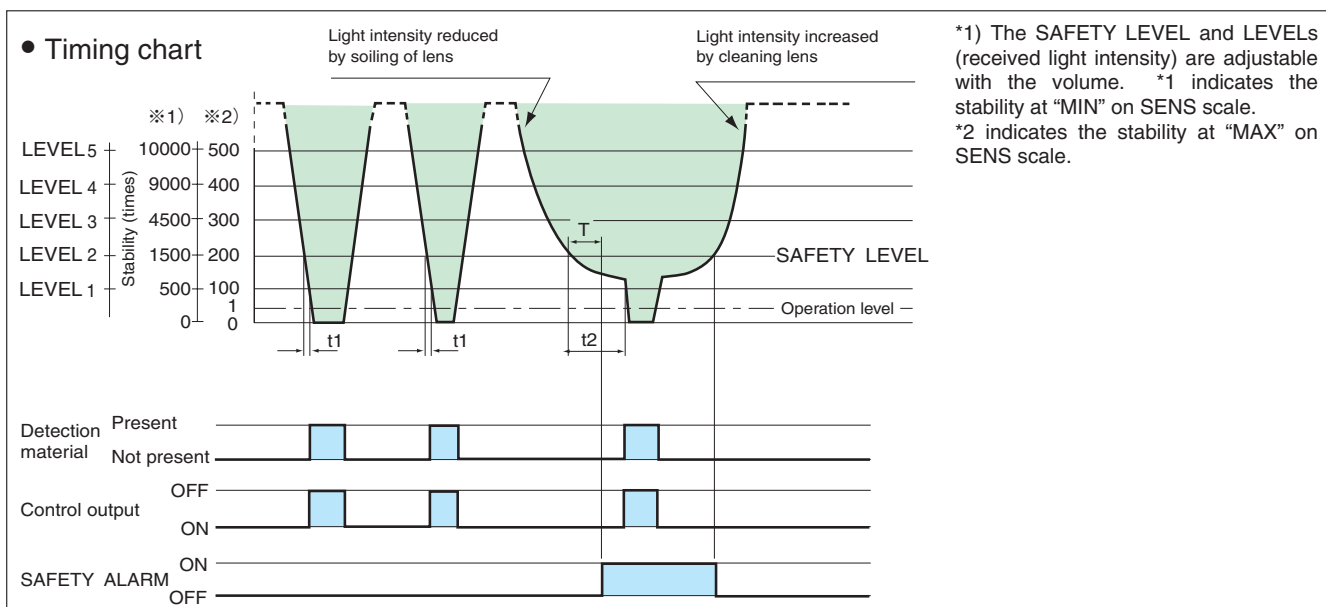



**SAFETY ALARM operation :** The duration between the reduction of the received light intensity level under the SAFETY LEVEL and the control output activation is calculated and, if this duration is longer than a certain duration T, the SAFETY ALARM is output.

For example, the duration t1 between the reduction of the received light intensity level under the SAFETY LEVEL and the control output activation at material detection is shorter than the duration T and the ALARM is not output. With soiled lens or misaligned light axis, duration t2 during which the light intensity is under the SAFETY LEVEL is longer, which is regarded as no margin in received light intensity level.  
(The duration T for SAFETY LEVEL check is set at about 2 minutes in the above example.)



# FT44A

## Connection



### Transmitter

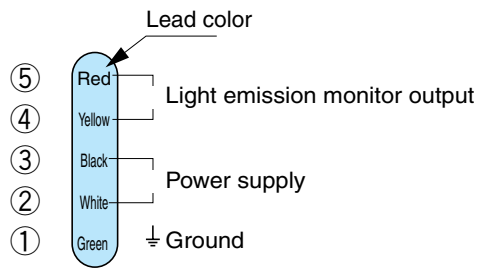

### Mini power relay output type Relay output type



### Solid-state output type: FTR44AC




When the leads are extended (100-300 m), stray capacitance between leads may cause rush current. If this poses any problem, provide a resistor (10-50  $\Omega$ ) in series with the contact.

When connecting an inductive load such as relay as the load, be sure to use diode, surge absorber, etc. for protection of output transistor from back electromotive force.

## AGS

The AGS terminals on the transmitter and receiver can be used in the following three ways:

### 1) Detection power increase

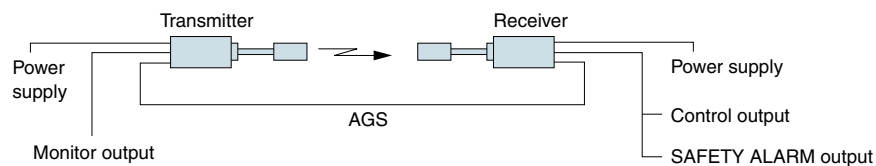

When the AGS terminals are connected with each other, a synchronization signal is sent out from the transmitter, which is detected with the AGS circuit in the receiver, and the sensitivity (amplifier gain) is automatically increased to about double that before the connection of AGS. This provides high power.

The synchronous rectifier circuit is activated at the same time, which increases resistance to noise for even higher reliability. This feature is effective for use in situations such as hampered light transmission due to smoke or vapor or environment subject to electric noise.

### 2) Prevention of interference

When two or more sensors are adjacently installed, light from the neighboring transmitter reaches the receiver even if the object blocks the light beam, this causes faulty operation. To prevent this situation, connect the AGS to an external controller to externally synchronize the transmitter emission and receiver gating.

This also automatically increases the receiver sensitivity and activates the synchronous rectifier circuit.

For details about the scanning controller, see "LSC Series."

### 3) Normal operation without connecting AGS

Connection of AGS provides advantages as described above. However, leaving the AGS unconnected has no effect on operation in ordinary environment and the sensor may be used as an ordinary photo sensor.



## Optical Head Power Characteristics (Typical example)

Different models of optical head (OHA and OH2) have different levels of power. The same optical head model may generate different levels of power depending on whether it is used for transmitter or receiver. This is due to the difference of power density depending on the effective lens diameter or spread of light beam.

The table on the right shows power levels with reference to the power 100 with OH2 used as the optical heads for both transmitter and receiver.

Optical head		Relative power (with OH2 as 100)
Transmitter	Receiver	
OH2	OH2	100
OH2	OHA	35
OHA	OH2	25
OHA	OHA	9


## Fiber Transmission Factor Characteristics (Typical example)

The figure shows relative transmission factor with reference to fiber optic cable FG2 as 1.

The transmission factor of FG10 is 70% of that of FG2.

When FG10 (10 m length) is used for both transmitter and receiver, the transmission factor is:

$$0.7 \times 0.7 = 0.49$$

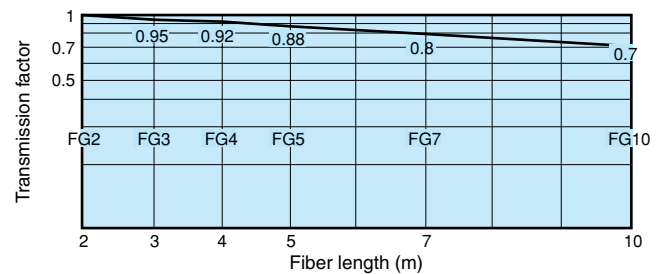

## Received Light Intensity Level Characteristics (Typical example)

The data shows margin in operation against detecting distance with fiber optic cable FG2 (length 2 m) and optical head OH2 used for both transmitter and receiver. For other fiber and optical head models, find the data based on the transmission factor of the fiber and power of the optical head.


When fiber optic cable FG2 (length 2 m) is used for both transmitter and receiver, the graphs directly shows the data and the margin in operation at detecting distance of 20 m is about 130,000 times.

When fiber optic cable FG10 (length 10 m) is used for both transmitter and receiver, the transmission factor is:

$$0.7 \times 0.7 = 0.49$$

Using this to find the margin in operation at detecting distance of 20 m with FG10 used for both transmitter and receiver,

$$130,000 \text{ (times)} \times 0.49 = 60,000 \text{ (times)}$$

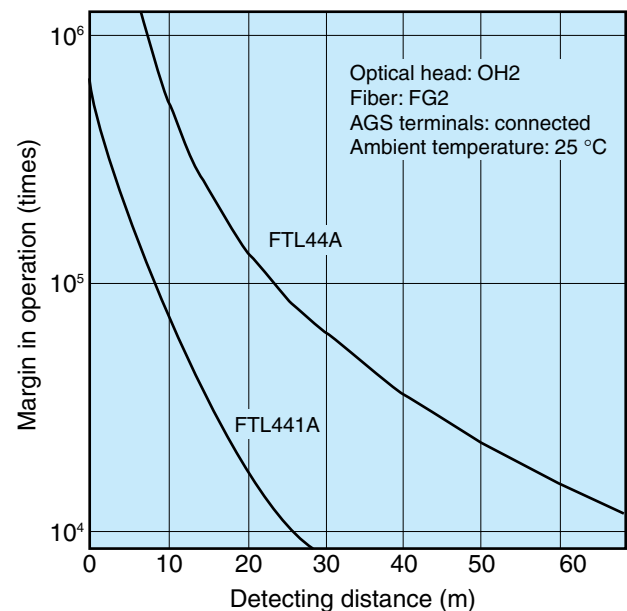

## Light axis alignment

See P. 520.

Do not attempt to visually align (with optical sight) the axis when laser beam is emitted.

# FT44A



## Directional Characteristics

The graph shows the spread of transmitter light beam and receiver angle of aperture.

For the spread of transmitter light beam, the maximum angle of aperture is  $\pm 1.7$  degrees, which translates to a spread of about 600 mm at 10 m.

The sides of this spread do not have enough light intensity and are not practical. To find a practical beam spread, consider relative light reception sensitivity of 50% or higher.


The angle of aperture for relative light reception sensitivity 50% is  $\pm 1.2$  degrees, which means that practical light beam spread is about  $\phi 400$  mm at detecting distance 10 m.

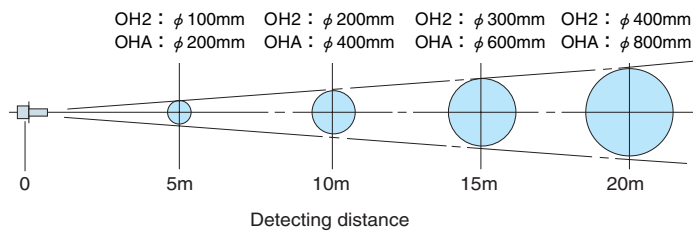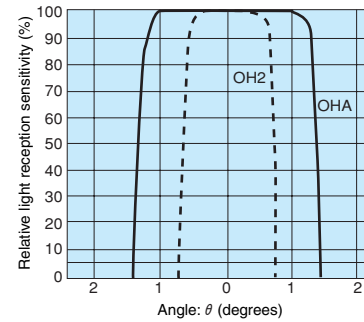

## Dimensions (in mm)

### Amplifier


CAD

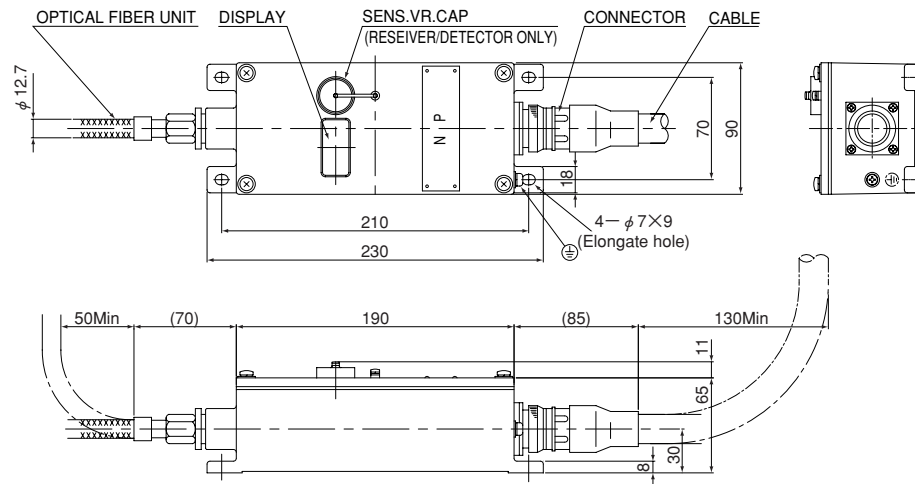


### Fiber

CAD

Model	Length (L)
FG2	2m
FG3	3m
FG4	4m
FG5	5m
FG7	7m
FG10	10m
FG15	15m
FG20	20m
FG30	30m

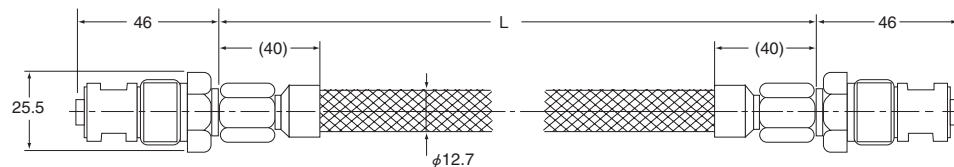

(Allowable bending radius)





## Dimensions (in mm)

### Example of combination of Airless hood and optical head

Optical head  
Model OHA

CAD



Mounting hole  
dimensions

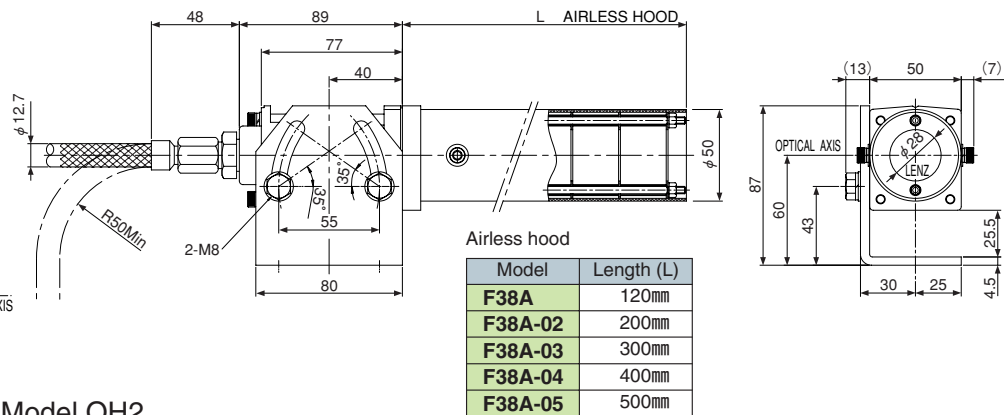

Optical head Model OH2  
Airless hood Model F70N

CAD

Mounting bracket bottom view

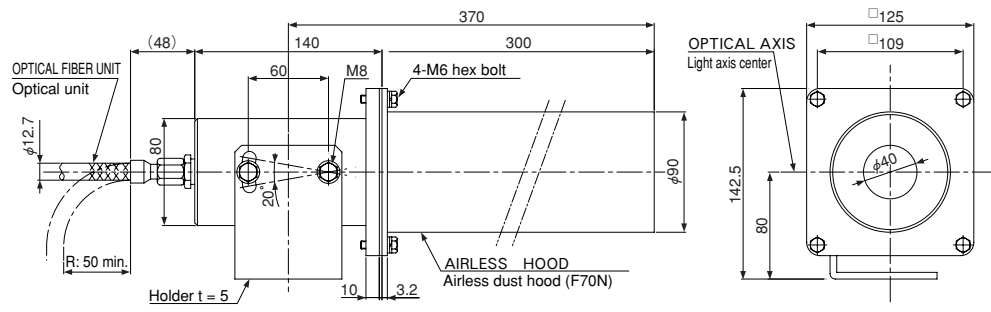



### Example of combination of air purge hood and optical head

Optical head Model OHA

CAD

Mounting hole  
dimensions

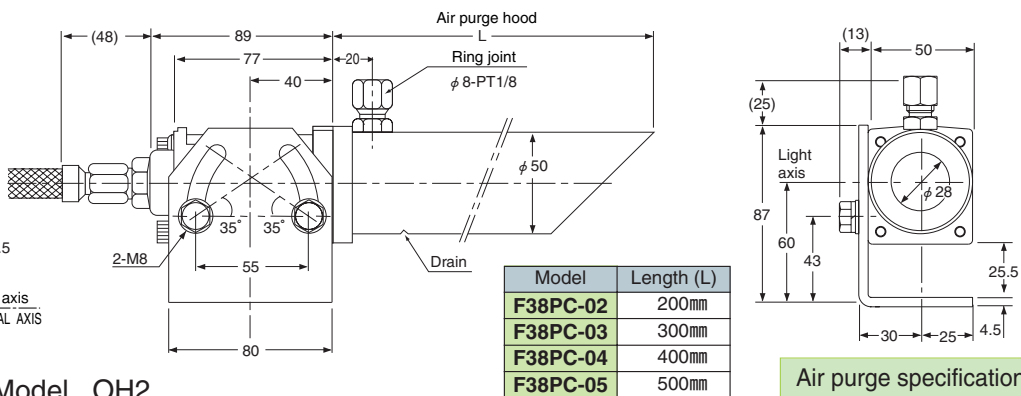


Optical head Model OH2


CAD

Air purge hood

Model	Length (L)
702L	200mm
703L	300mm
704L	400mm
705L	500mm




Mounting bracket bottom view

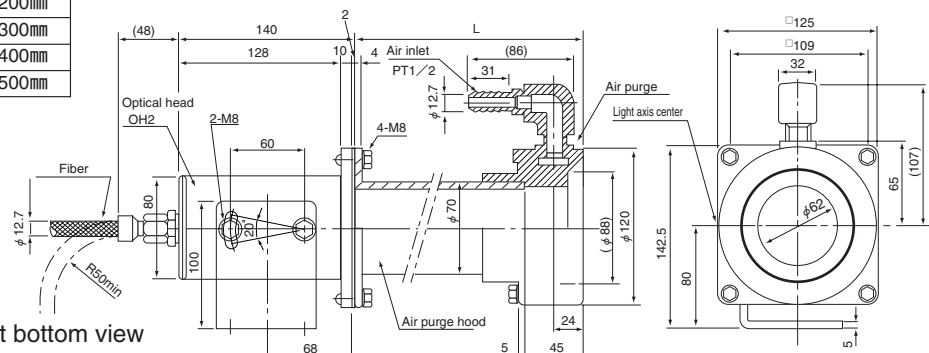

Air purge specification  
Flow rate...200 l/min  
Withstand pressure...0.98MPa


# Optical head

Optical head for FT44A series

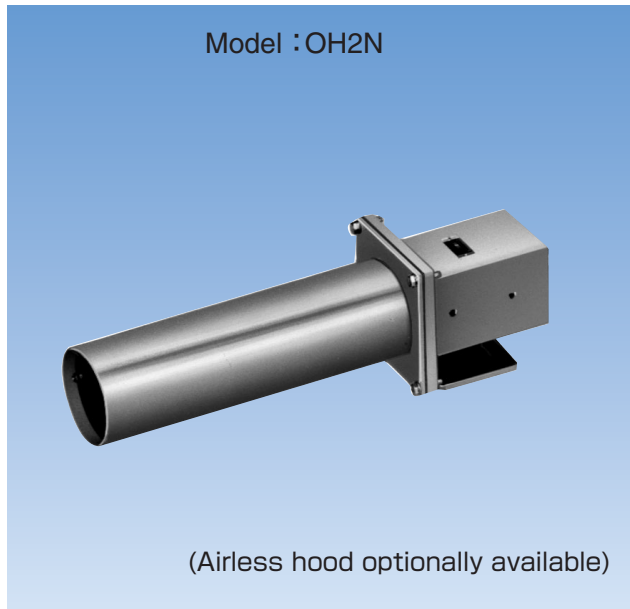



- **Greatly increased power**  
About fivefold enhancement (compared with Takex OH2)
- **Narrow-view achieved**  
Light beam width and view reduced to about 60%
- **Easily replaceable**  
Readily replaceable where OH2 was not powerful enough

## Detecting distance and Light Beam Width

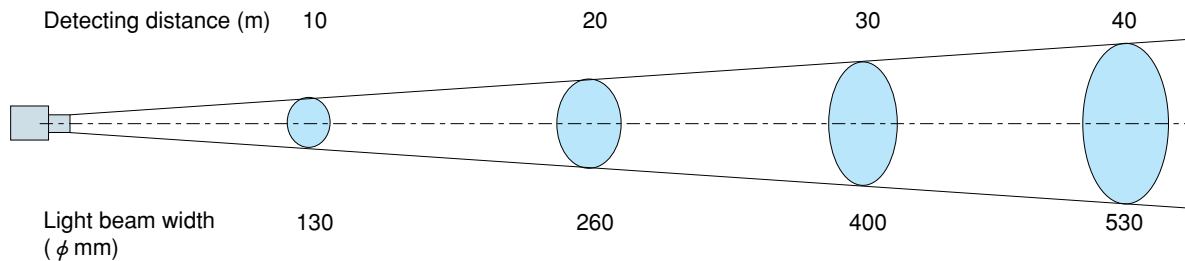


## Dimensions (in mm: with Airless hood and fiber attached)

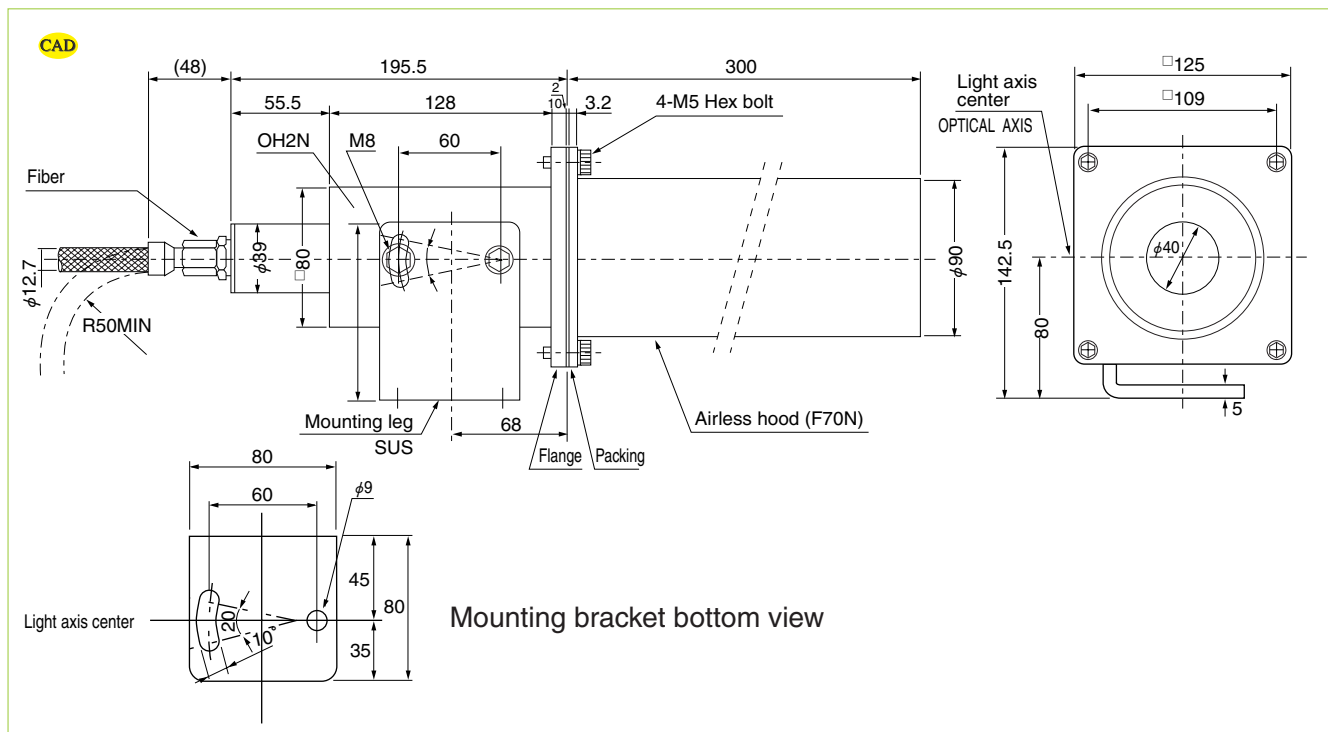

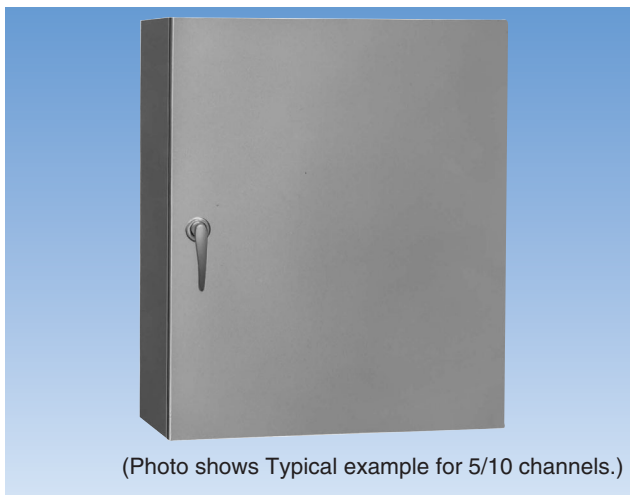

(Photo shows Typical example for 5/10 channels.)

(Model No.)

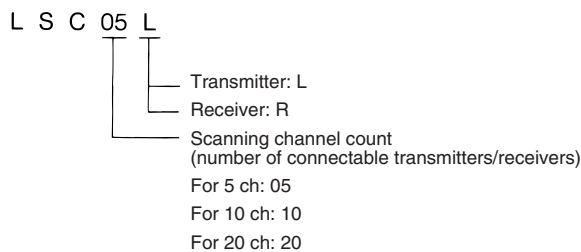


### Specification

Type	For transmitter	LSC05L	LSC10L	LSC20L
	For receiver	LSC05R	LSC10R	LSC20R
Channel count		5	10	20
Power supply	100-110 VAC or 200-220 VAC +10%~15%, 50/60 Hz			
Power consumption	10W max			
Wiring length	100 m max. (AGS/CLOCK signal)			

Contact Takex for detailed material data.

### Prevents interference between adjacently installed sensors


- Controller prevents interference between adjacent installation of two or more sensors
- Controllers separate for transmitter and receiver
- When two or more sensors are adjacently installed, light from the neighboring transmitter reaches the receiver even if the object blocks the light beam, which causes faulty operation. To prevent this situation, the LSC Series controller synchronizes sensors for externally controlling the light emission pulse of the transmitter and gating of the receiver.

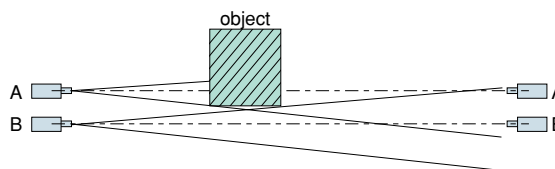

Although the light from Transmitter A is blocked by the object, light from Transmitter B enters Receiver A and the object cannot be detected.


- Controllers for 5, 10 and 20 channels are available according to the number of sensors to be controlled.

### Dimensions (in mm)

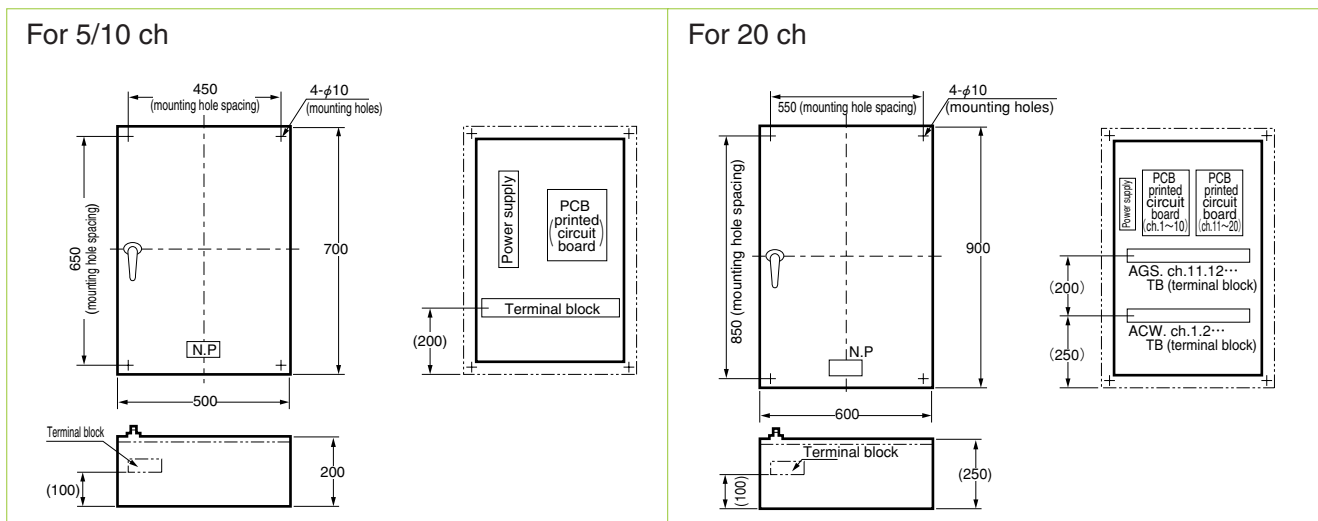

## Self-check feature provided

Within detecting distance 40 m (with fiber length 2 m)

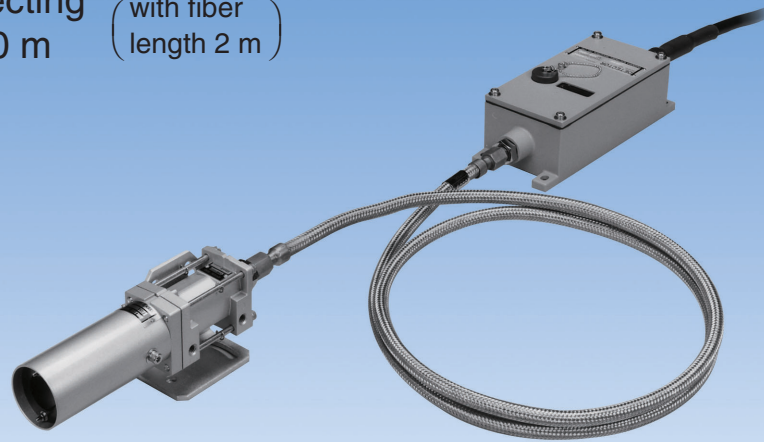

Transmitter and receiver as a set; dimensions same for both

The sensor is composed of an optical head and amplifier connected with a fiber optic cable.

This allows installation of the detecting head that contains no electronic components at a high-temperature location and of the amplifier containing electronic components at a remote location.

### Features

- No cooling required  
The optical head that comprises the detecting part integrating hood and optical lens and fiber have no electronic component, which allows use in ambient temperature of up to 200 °C without cooling.
- 5-point level indicator  
Received light intensity is indicated at 5 levels, offering easy checking of stability and light axis alignment.
- Self-check feature integrated  
Transmitter outputs alarm signals if light emission stops due to failure, etc. Receiver outputs alarm signal (SAFETY ALARM) when there is not much margin in the received light intensity level at detection due to light axis misalignment, soiling of lens, etc.
- Excellent durability  
Reliable design provides robustness and resistance to heat and corrosion.
- Different hoods available  
Attachable airless hood that requires no air purging in ordinary installation such as horizontal and angled downward installation and air purge hood for comparatively dusty locations.

## Ordering Guide

Fiber type CMDs do not have set model Nos. Order by specifying the individual model Nos. of components.

- Example


For ordering sensor with the following properties:

- Detecting distance: up to 40 m
- Relay output
- Fiber length: 2 m
- Compact, lightweight Airless hood


Product name		Model	Quantity
Amplifier	Transmitter	<b>FTL10A</b>	1
	Receiver	<b>FTR10A</b>	1
Optical head		<b>OHA</b>	2
Fiber		<b>FG2</b>	2
Hood		<b>F38A</b>	2

For combination of models marked with\*


## [Fiber optic cable]

Length	Model	Appearance (Typical example)
2m	<b>FG2</b> *	
3m	<b>FG3</b>	
4m	<b>FG4</b>	
5m	<b>FG5</b>	
7m	<b>FG7</b>	
10m	<b>FG10</b>	
15m	<b>FG15</b>	
20m	<b>FG20</b>	
30m	<b>FG30</b>	

## [Amplifier]



Type	Model	Appearance (Typical example)
Transmitter amplifier	<b>FTL10A</b> *	
Receiver amplifier	Mini power relay output <b>FTR10A</b> *	
	Relay output <b>FTR10AH</b>	
	Solid-state output <b>FTR10AC</b>	Photo: amplifier for receiver

## [Optical head] For transmitter/receiver

Model	Appearance
<b>OHA</b> *	

Note: This product is not compatible with the existing airless hood or air purge hood. Spacer model OHA-12 is available for users of existing hoods.


## [Hood]

Type	Length	Model/shape	Appearance (Typical example)
Airless hood	120mm	<b>F38A</b> *	
	200mm	<b>F38A-02</b>	
	300mm	<b>F38A-03</b>	
	400mm	<b>F38A-04</b>	
	500mm	<b>F38A-05</b>	
Air purge hood	200mm	<b>F38PC-02</b>	
	300mm	<b>F38PC-03</b>	
	400mm	<b>F38PC-04</b>	
	500mm	<b>F38PC-05</b>	

## Configuration

- Hood  
Provided for protection from disturbing light or preventing dirt deposits on optical lens head.
- Optical head  
Light emitted from the end of the fiber is condensed with the lens and then projected into the receiver.

- Fiber optic cable  
Glass optical fiber that directs the light emitted from the amplifier to the optical head.

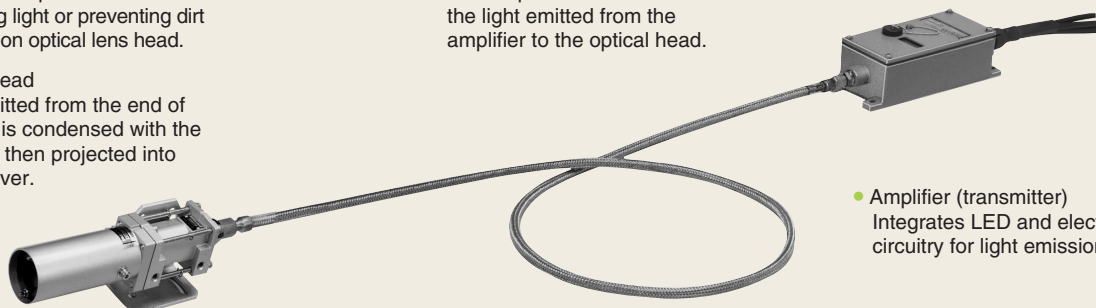

- Amplifier (transmitter)  
Integrates LED and electronic circuitry for light emission.

- Amplifier (receiver)  
Converts the light transmitted through fiber optic cable with the light-sensitive element into electric signals for control output (mini power relay output, reed relay output or Solid-state output) via electronic circuitry.

Components for transmitter and receiver are the same except for amplifiers.


# FT10A

## Rating/Performance/Specification/Environmental Specification

Output specification		FTL10A		
Monitor output (operation)	Power	ON		
	Monitor	Abnormal		
Output	OPEN	Max 1 s		
	CLOSE			
Rating	Contact output 5A 250V AC max. (Resistance load)			
Receiver model		FTR10A	FTR10AH	FTR10AC
Output type	Mini power relay output		Relay output	Solid-state output
Control output	ON-OFF operation (Light-ON)			
Rating	Transfer contact	5 A 250 VAC max. (resistance load)	0.5 A 48 VDC max. (resistance load)	0.5 A 250 VAC/DC max. (resistance load)
Response time		15ms max.	5ms max.	3ms max.
Safety Alarm output	Power	ON		
	Monitor	Abnormal		
Output	ON (L)			
	OFF (H)			
Rating	a contact 5A 250VAC max. (resistance load)			
General specification				
Detecting distance	Fiber length 2m: 40 m max. 5m: 30 m max. 10m: 20 m max.			
Valid lens diameter	28 mm			
Smallest detectable object	28 mm diameter			
Power Supply	100-220 VAC +10%/-15% 50/60Hz			
Power consumption	Transmitter: 10 W max.; receiver: 10 W max.			
Connection	with Connector cord 2m (CVV1.25mm <sup>2</sup> )			
Ambient temperature	Optical head, Fiber: -25 to +200°C Amplifier: -25 +55°C (Non-freezing)			
Storage temperature	-40 to +70°C (Non-condensing)			
Ambient humidity	35 to 85%RH Max. (Non-condensing)			
Fiber-optic unit allowable bending radius	50mm			
Insulation resistance	Between power supply and case: 500 VDC, 20 MΩ or higher Between output and case: 500 VDC, 20 MΩ or higher Between power supply and output: 500 VDC, 20 MΩ or higher			
Dielectric withstanding	Between power supply and case: 1500VAC for 1 minute Between output and case: 1500VAC for 1 minute (between reed relay outputs: 1,000 VAC for 1 minute) Between power supply and output: 1500VAC for 1 minute (between reed relay outputs: 1,000 VAC for 1 minute)			
Vibration	10-55 Hz / 0.75 mm amplitude / 2 hours each in 3 direction			
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions			
Protective structure	IP66			
Mass	Optical head	OHA: About 680g		
	Airless hood	F38A: about 240g F38A-04: about 550g	F38A-03: about 430g F38A-05: about 650g	
	Air purge hood	F38PC-02: about 240g F38PC-04: about 370g	F38PC-03: about 300g F38PC-05: about 440g	
	Fiber	FG2 : about 0.7kg FG5 : about 1.3kg FG15: about 3.1kg	FG3 : about 0.9g FG7 : about 1.6g FG20: about 4.1g	FG4 : about 1.1kg FG10: about 2.1kg FG30: about 6.1kg
	Amplifier	Transmitter: about 1.5 kg; receiver: about 1.5 kg		


## Input/Output Circuit and Connection

- Control output  
Model FTR10A  
Model FTR10AH




Relay activated at light reception

### Model FTR10AC



Saturation voltage: 3 V max.



- SAFETY ALARM OUTPUT (all models)



When connecting an inductive load such as relay as the load, be sure to use diode, surge absorber, etc. for protection of output transistor from back electromotive force.



## Amplifier panel layout

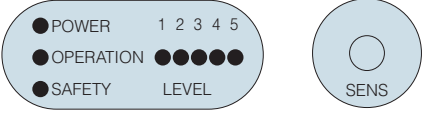Transmitter	Receiver
<ul style="list-style-type: none"> <li>Light emission monitor Used to determine if the transmitter is functioning normally. An amplifier for monitoring is integrated in the sensor, which monitors the radiation from the LED used as the light source and outputs alarm signal (OPERATION error output) if the emission stops. The alert output relay is normally at ON state.</li> </ul>	
<ul style="list-style-type: none"> <li>Power Illuminated at power-up.</li> </ul>	<p><b>POWER</b> Illuminated at power-up</p>
<ul style="list-style-type: none"> <li>OPERATION Illuminated when the transmitter is normally functioning and goes out when it stops functioning.</li> </ul>	<p><b>OPERATION</b> Operation indicator: illuminated when control output is activated.</p>
	<p><b>SAFETY</b> Stability check (stability operation) indicator: Green indicator is illuminated to indicate stable operation. When there is not much margin in the received light intensity level, SAFETY ALARM output is activated and the indicator starts flashing.</p>
	<p><b>LEVEL</b> Received light intensity is shown with a 5-point indicator.</p>
	<p><b>SENS</b> SAFETY LEVEL adjustment volume Volume for adjustment of the SAFETY LEVEL and LEVEL INDICATOR illumination level.</p>

## Control Output and Stability Check Feature


Control output: Relay is activated when the light from the transmitter is detected by the receiver for output.

Relay is deactivated when the light from the transmitter is blocked by the detection object.

Stability check feature (SAFETY ALARM output)

Operation: The light intensity level at light reception is observed and an alarm signal is output when the light intensity is equal to or below the SAFETY LEVEL due to soiling of lens or light axis misalignment, etc.

The SAFETY LEVEL is variable between 2 and 4 times as much as the operation level. The output is reset when the received light intensity exceeds the SAFETY LEVEL.

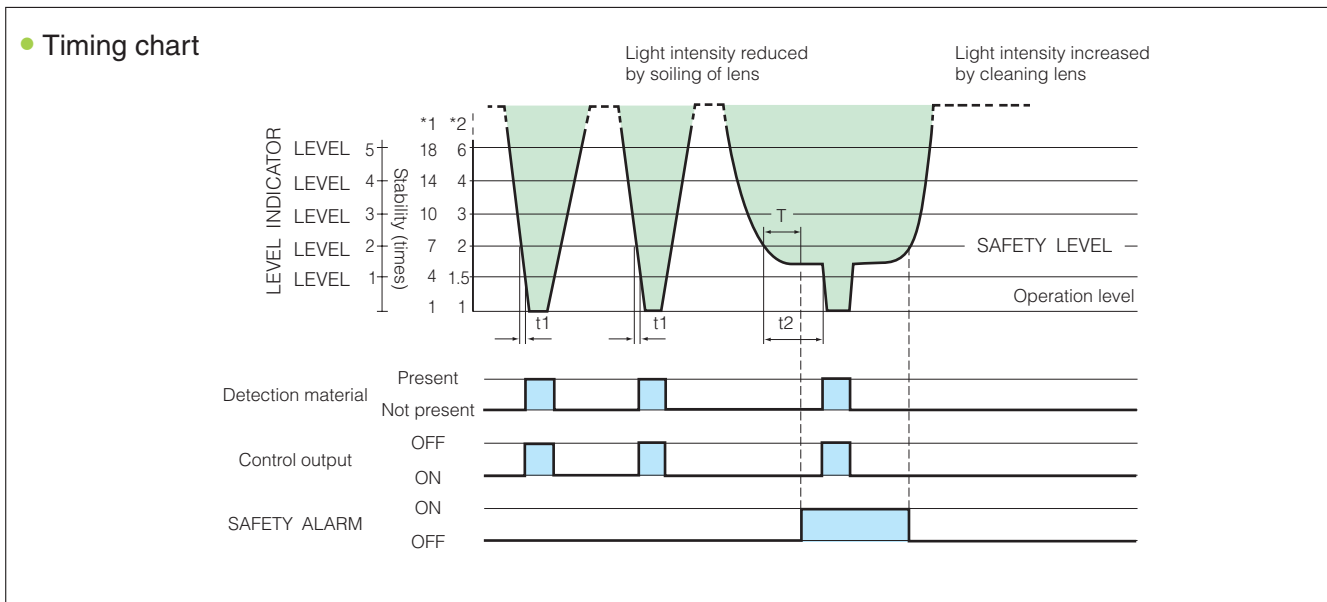

SAFETY ALARM operation: Timing is started when the received light intensity level is reduced to below the SAFETY LEVEL, which is reset when operation output is activated. SAFETY ALARM signal is output if this duration is longer than a certain duration T.


For example, the duration t1 between the reduction of the received light intensity level under the SAFETY LEVEL and the output activation at material detection is shorter than the duration T and the ALARM is not output. With soiled lens or misaligned light axis, duration t2 during which the light intensity is under the SAFETY LEVEL is longer (always under the check level at light reception), which is regarded as no margin in received light intensity level. (The duration T for SAFETY LEVEL check is set at about 2 minutes in the above example.)

The SAFETY LEVEL and LEVELs on the level indicator (received light intensity) are adjustable with the volume. \*1 indicates the stability at "MIN" on SENS scale and \*2 indicates the stability at "MAX" on SENS scale.


# FT10A

## Connection


### Transmitter: FTL10A

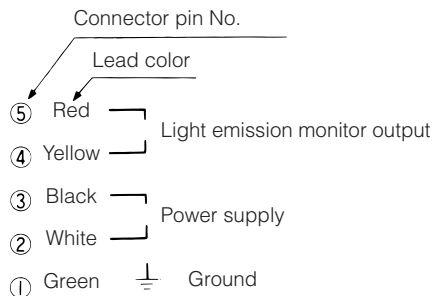

### Receiver: FTR10A (Mini power relay output) FTR10AH (Relay output)

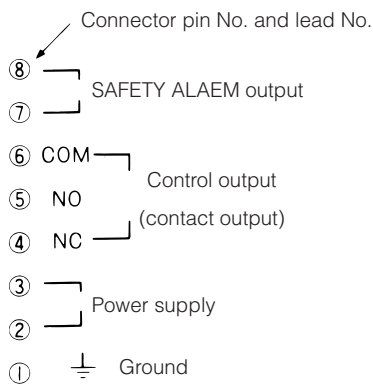

### Receiver: FTR10AC (Solid-state output type)

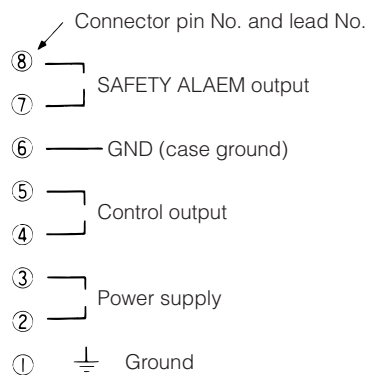

## Received Light Intensity Level Characteristics (Typical example)


The data shows margin in operation against detecting distance with fiber optic cable FG2 (length 2 m) used for both transmitter and receiver. For other fiber models, find the data based on the transmission factor of the fiber.

When fiber optic cable FG2 (length 2 m) is used for both transmitter and receiver, the graphs directly shows the data and the margin in operation at detecting distance of 10 m is about 180 times.

When fiber optic cable FG10 (length 10 m) is used for both transmitter and receiver, the transmission factor is:  
 $0.7 \times 0.7 = 0.49$ .

Using this to find the margin in operation at detecting distance of 10 m with FG10 used for both transmitter and receiver,

$$180 \text{ (times)} \times 0.49 = 88.2 \text{ (times)}$$

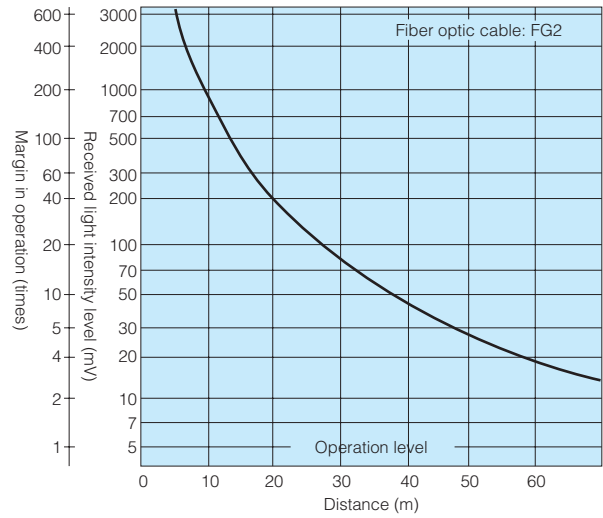


## Fiber Transmission Factor Characteristics (Typical example)

The figure shows relative transmission factor with reference to fiber optic cable FG2 as 1.

The transmission factor of FG10 is 70% of that of FG2.

When FG10 (10 m length) is used for both transmitter and receiver, the transmission factor is:

$$0.7 \times 0.7 = 0.49$$

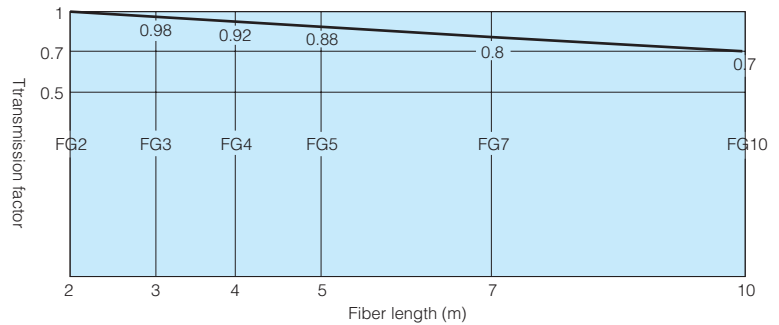

## Directional Characteristics (Typical example)



The graph shows the spread of transmitter light beam and receiver angle of aperture.

For the spread of transmitter light beam, the maximum angle of aperture is  $\pm 1.7$  degrees, which translates to a spread of about  $\phi 600$  mm at 10 m.

The sides of this spread do not have enough light intensity and are not practical. To find a practical beam spread, consider relative light reception sensitivity of 50% or higher.

The angle of aperture for relative light reception sensitivity 50% is  $\pm 1.2$  degrees.

This means that practical light beam spread is about  $\phi 400$  mm at detecting distance 10 m.

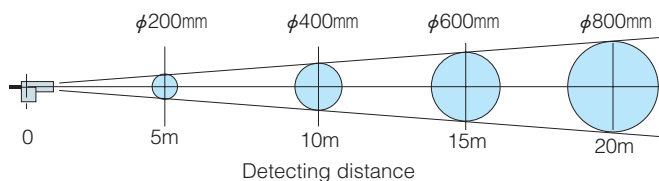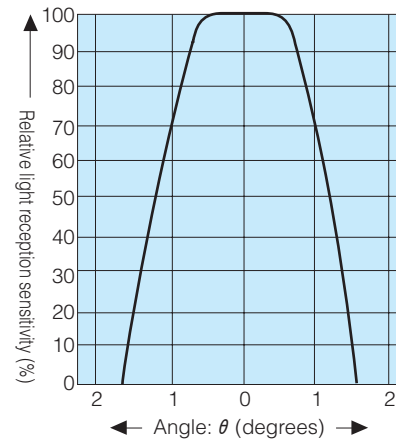

# FT10A

## Light Axis Alignment


Align the light axis so that all LEDs are illuminated while checking with the 5-point level indicator on the receiver.

At the maximum sensitivity (SENS MAX), LEVEL 5 indicator is illuminated at the margin of 6 times but this does not mean that the light axis is perfectly aligned.

Although the distance and atmosphere may have some effect, as a general rule, align the light axis with the sensitivity at SENS MIN so that the LEVEL 5 indicator is illuminated for operation with the maximum margin (this makes the margin more than 18 times).


### Alignment with optical sight

Use the optical sight provided on the optical head.

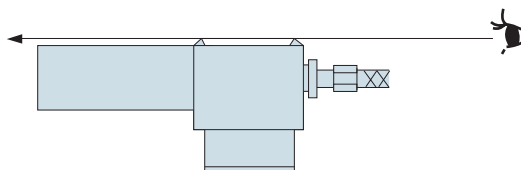

### Alignment with Light axis aligner (optional)

Mount an Light axis aligner on the optical head and radiate the light beam pattern through the transmitter lens. More accurate field adjustment may be made based on the projected beam pattern.

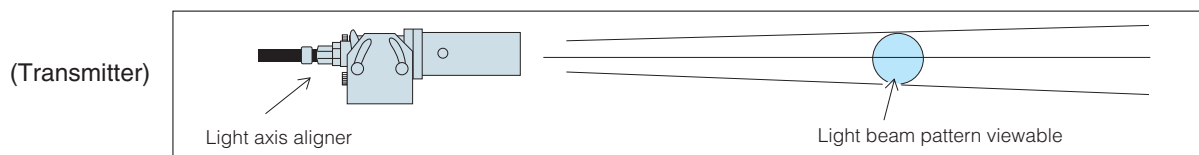

- Two types are available depending on light source  
(Halogen lamp type)

Light axis aligner  
Model OHF-CL  
Power supply unit  
Model OHF-CLP  
Halogen lamp (spare)  
Model OHF-L5

- (Red semiconductor laser type)


Class 2  
Light axis aligner  
Model OHF-LD  
Power supply unit  
Model OHF-LDP

### Receiver for Light axis alignment (optional)

Used for light axis alignment of receiver of fiber type CMD.

Mount on the optical head of the receiver and check the received light intensity with the volume of sound from the earphone and the LED level indicator.

Model OHF-CR

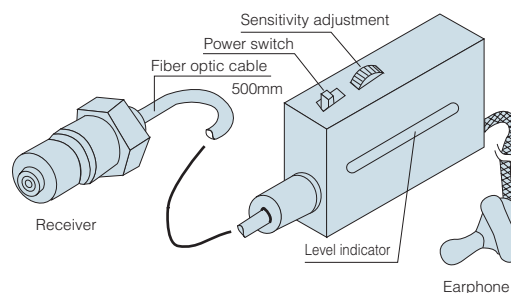

### Checker (optional)



Model CL1 (transmitter)  
Portable transmitter used for checking the operation of the receiver.




Model CR2 (with indicator)  
Portable receiver for checking the transmitter and light axis alignment of position of light emitted from the transmitter while listening to the sound.

## Dimensions (in mm)

### Amplifier


CAD

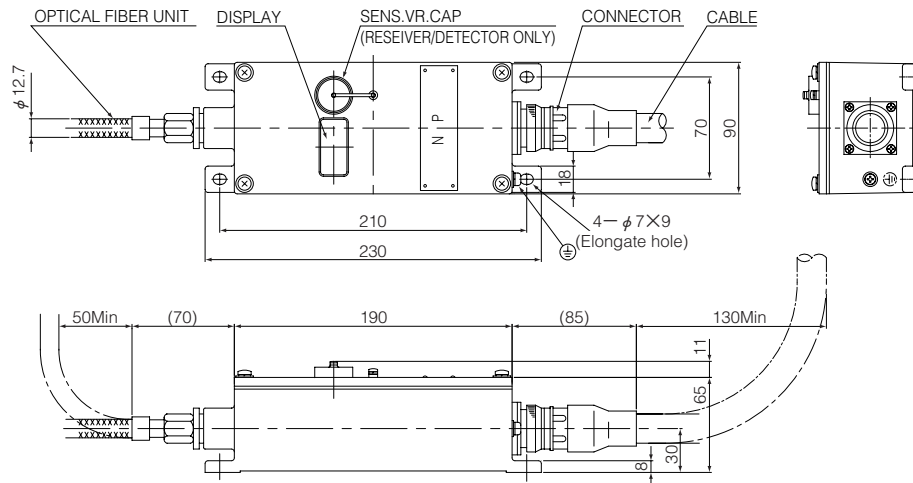

### Example of combination of air purge hood and optical head

#### Optical head Model OHA


CAD

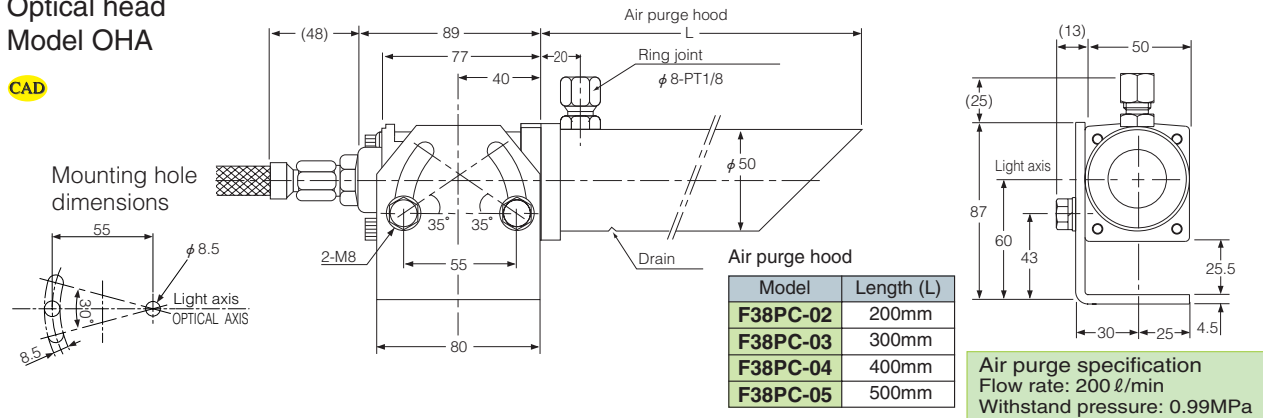

### Example of combination of Airless hood and optical head


#### Optical head Model OHA

CAD

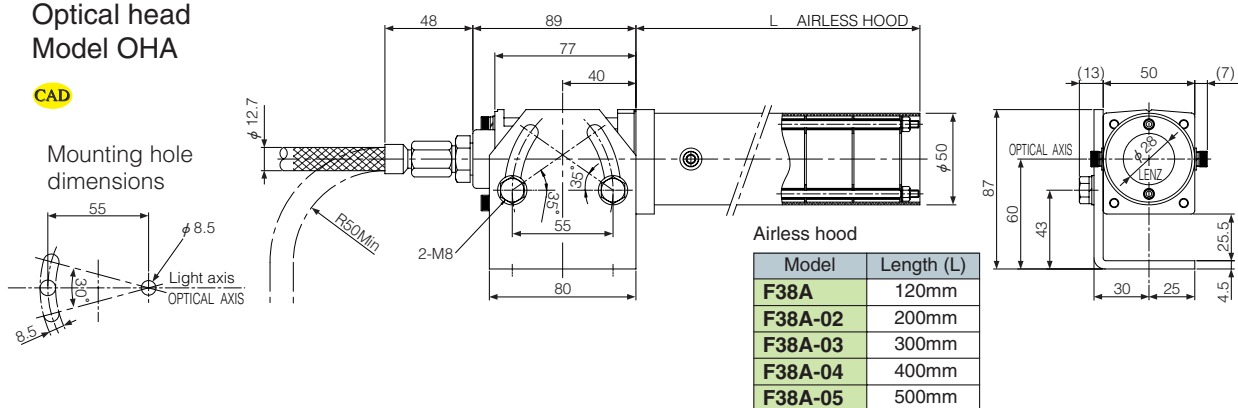


### Fiber

CAD

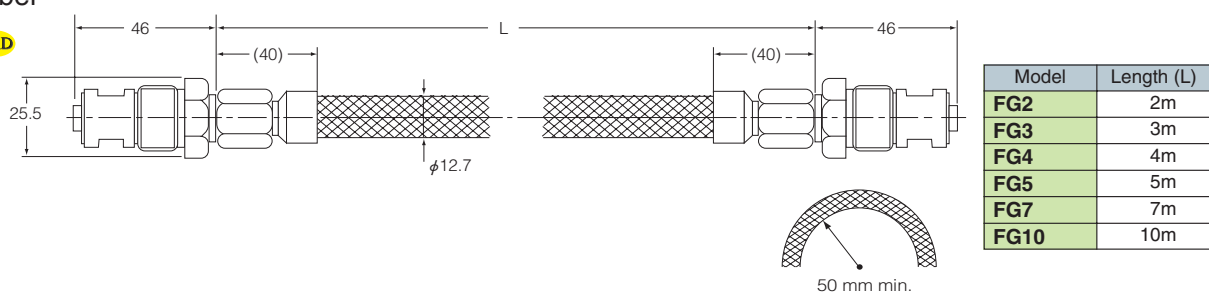

## Ultra-small detecting head

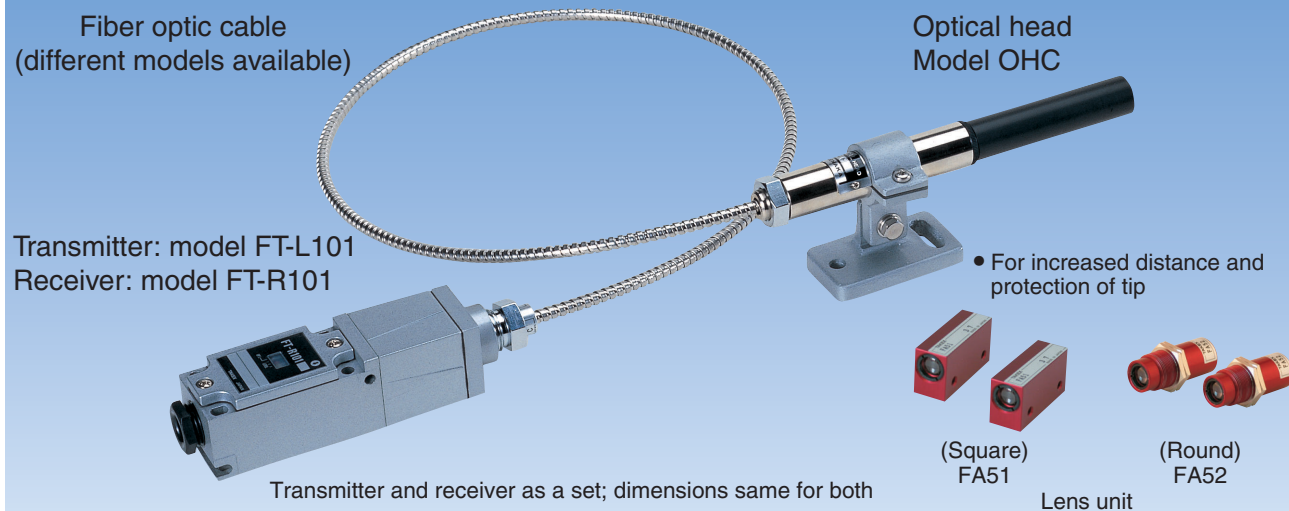

The photo sensor is composed of an optical head and amplifier connected with a fiber optic cable.

This allows installation of the detecting head that contains no electronic components at a high-temperature location and of the amplifier containing electronic components at a remote location.

### Features

- Wide power supply range  
Wide range of power voltage 100-240 VAC.
- Light emission monitor and 3-point level indicator  
The transmitter is provided with light emission monitor circuit, which outputs alarm signal when light emission stops due to failure, etc. The receiver has 3 LEDs for checking the received light intensity level, offering easy checking of stability and light axis alignment

### Type/Price

Type	Model	Overview	
Amplifier	<b>FT-L101</b>	Transmitter	
	<b>FT-R101</b>	Receiver	
Fiber	<b>GT205AD</b>	Fiber length	0.5m
	<b>GT21AD</b>		1m
	<b>GT22AD</b>		2m
	<b>GT23AD</b>		3m
	<b>GT25AD</b>		5m
	<b>GT27AD</b>		7m
	<b>GT210AD</b>		10m
Optical head	<b>OHC</b>	Heat resistance 200°C, IP 67	
Lens unit	<b>FA51</b>	Square	
	<b>FA52</b>	Round	
Adapter	<b>FT101-AD2</b>	Adapter for OHA	

### Adapter

- An adapter is required to use an OHA optical head.  
Adapter for OHA  
Model FT101-AD2

#### Simplified combination

Detecting distance: 1.5-2.7 m (depending on fiber)

Order example

Product name		Model	Quantity
Sensor main unit	Transmitter	<b>FT-L101</b>	1
	Receiver	<b>FT-R101</b>	1
Lens unit		(Respective model)	2
Fiber		(Respective model)	2

#### Standard combination

Detecting distance: 12-22 m (depending on fiber)


Order example

Product name		Model	Quantity
Sensor main unit	Transmitter	<b>FT-L101</b>	1
	Receiver	<b>FT-R101</b>	1
Optical head		<b>OHC</b>	2
Fiber		(Respective model)	2

## Rating/Performance/Specification/Environmental Specification


Output specification				
Transmitter model	<b>FT-L101</b>			
Light source	Infrared LED			
Light emission monitor output	Relay contact output 1C			
Operation	Power ON OFF			
	Monitor Normal Abnormal			
	Output ON OFF			
Rating	250V AC (Resistance load)			
Receiver model	<b>FT-R101</b>			
Output type	Relay contact output 1C			
Rating	250V AC (Resistance load)			
Operation mode	Light-ON / Dark-ON (Switching)			
Response time	20ms max.			
General specification				
Detecting distance	Fiber	Only Fiber	on FA51/52	on OHC
	GT205AD	55cm	2.7m	22m
	GT21AD	55cm	2.7m	22m
	GT22AD	50cm	2.5m	20m
	GT23AD	45cm	2.2m	18m
	GT25AD	40cm	2.0m	16m
	GT27AD	35cm	1.8m	14m
GT210AD	30cm	1.5m	12m	
Fiber-optic unit allowable bending radius	50mm			
Power Supply	100-240 VAC ±10%, 50/60 Hz			
Power consumption	Transmitter: 2 W max.; receiver: 2 W max.			
Indicator	Transmitter.	Power indicator: Green LED, Monitor indicator: Red LED		
	Receiver.	Power indicator r: Green LED, Monitor indicator: Red LED		
Connection	Terminal block (screw: M3.5, width: 8.1mm)			
Ambient temperature	Optical head, Fiber: -25 to +200°C Amplifier: -25 +55°C (Non-freezing)			
Storage temperature	-40 to +70°C (Non-condensing)			
Ambient humidity	35 to 85%RH (Non-condensing)			
Ambient light	10,000 lx (incandescent lamp)			
Protective structure	IP66			
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction			
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions			
Dielectric withstanding	Input/Output - Case, Input - Output AC2000V for 1 minute			
Insulation resistance	20MΩ max. (at 500VDC)			
Case material	Zinc die-cast			
Mass	Transmitter: 720g, Receiver.:720g			

## Operation and Switch Setting Transmitter



- ①P.L: power indicator
- ②OP.L: light emission monitoring operation indicator  
Illuminated when transmitter is functioning normally.


## Receiver




- ①Light-ON/Dark-ON selector switch  
Set according to the situation  
L.ON: signal output when light from transmitter is received.  
D.ON: signal output when light is blocked.
- ②Operation indicator  
Illuminated when output is activated.
- ③Level indicator  
A set of 3 LEDs indicates stability.  
LEVEL 1: illuminated when light intensity of about twice as much as operation level is detected.  
LEVEL 2: illuminated when light intensity of about four times as much as operation level is detected.  
LEVEL 3: illuminated when light intensity of about eight times as much as operation level is detected.

## Input/Output Circuit and Connection

### Transmitter

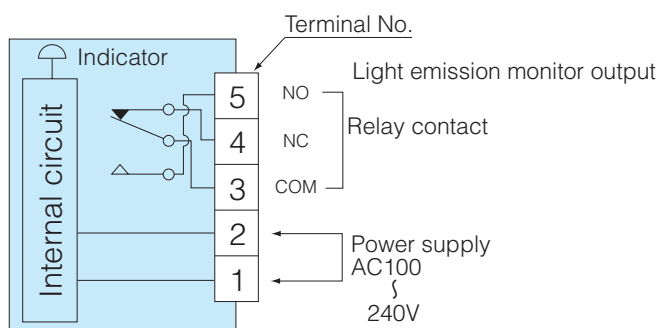


### Receiver

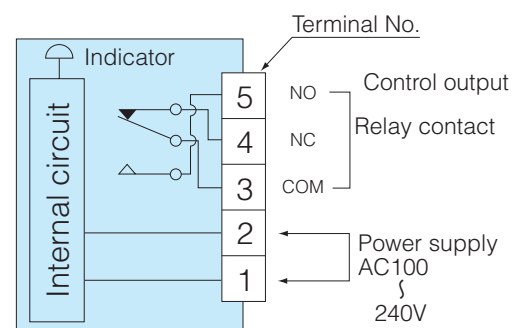


# FT101

## Directional Characteristics (Typical example)


- Fiber only

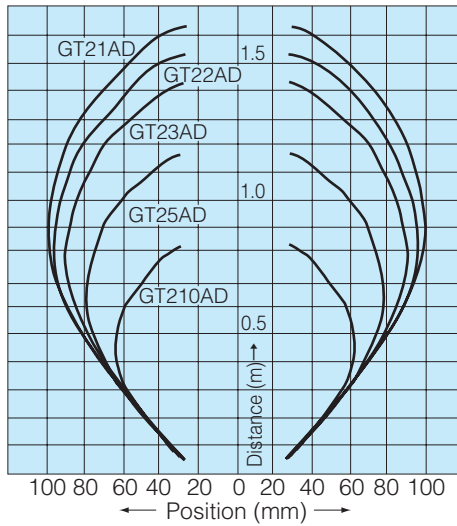

- With lens unit FA51/52 attached

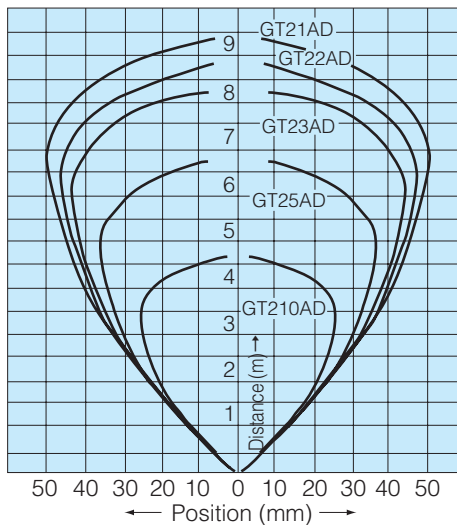


- With optical head OHC attached

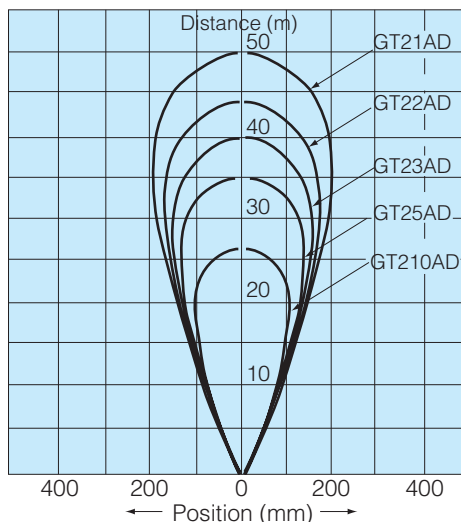


## Distance-Output Characteristics (Typical example)


- Fiber only

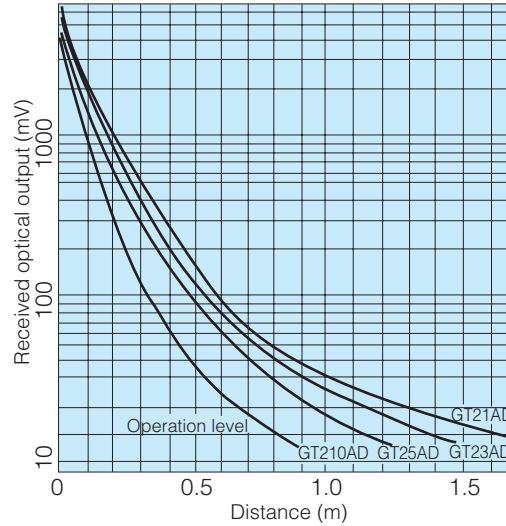

- With lens unit FA51/52 attached

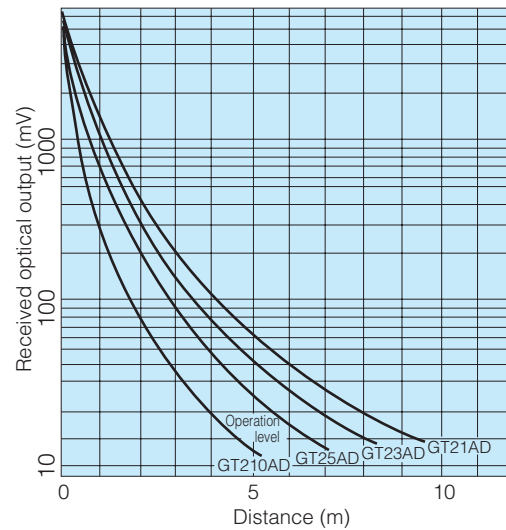

- With optical head OHC attached

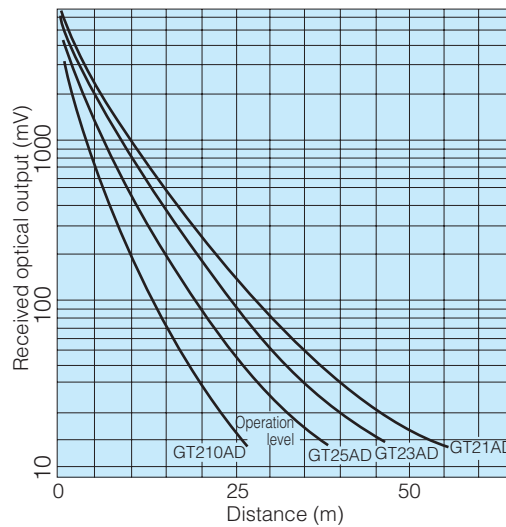





## Dimensions (in mm; for transmitter and receiver)

### Sensor main unit


CAD

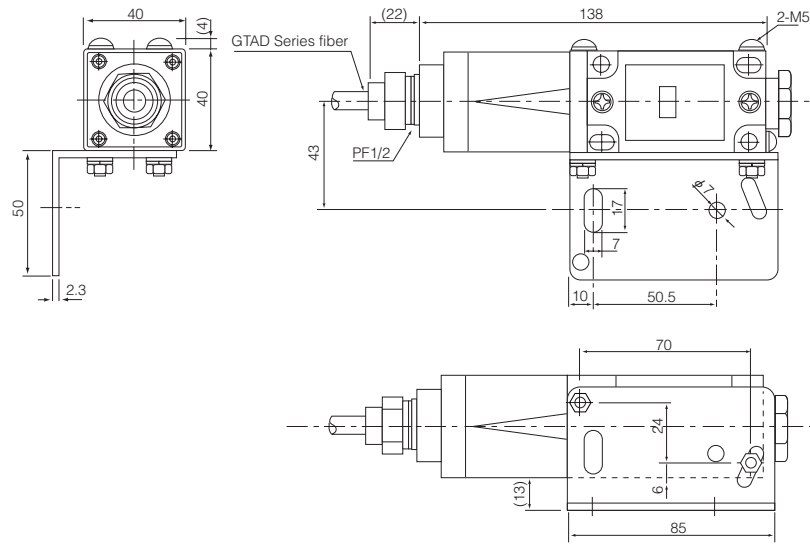

### Optical head

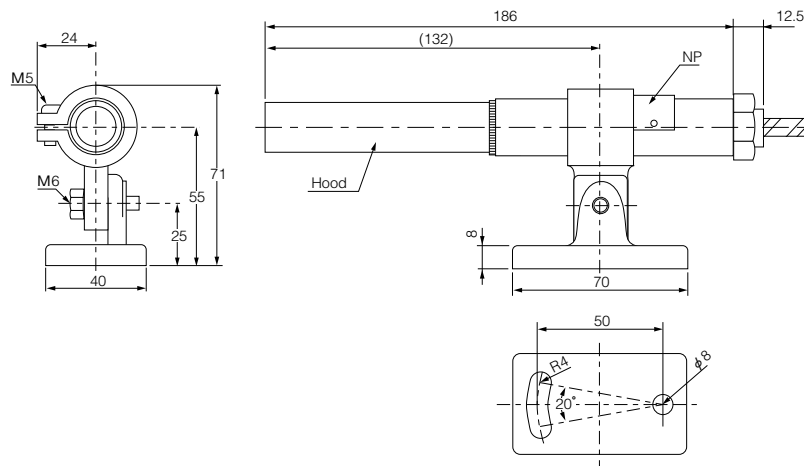


### Fiber

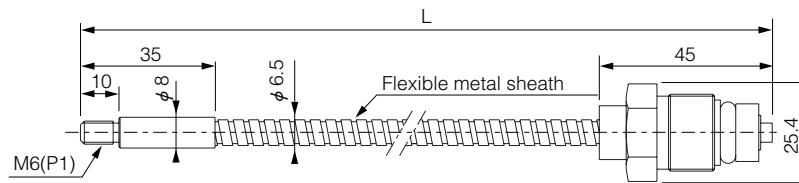


For fiber length (L), see Type/Price.

### Lens unit

#### Model FA51

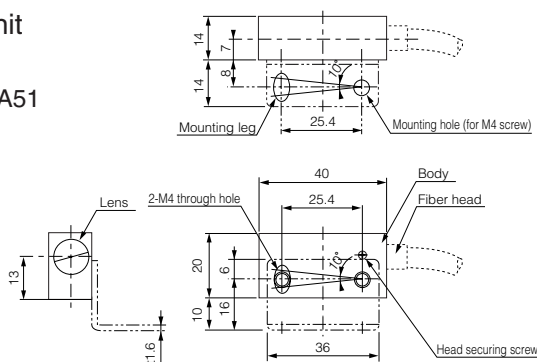


#### Model FA52

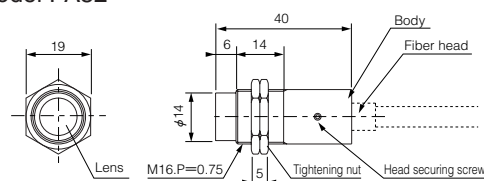

Long distance (50 m) detection with high sensitivity  
Compact, robust and inexpensive

Operating temperature:  $-10 - +150\text{ }^{\circ}\text{C}$

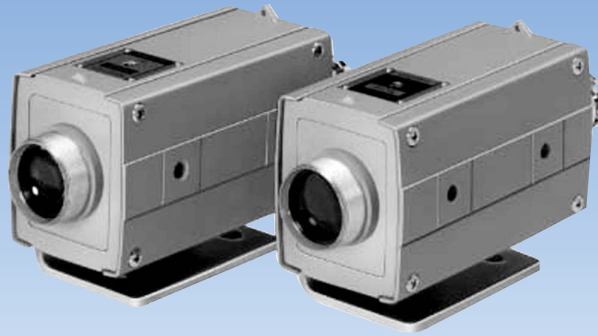

The KL(R)50 Series sensors are through-beam type CMDs that output ON-OFF signals by detecting blocking of light by the detected object that passes between the transmitter and receiver.

For receivers, relay output and voltage output types are available depending on the output mode.

## Features

- Compact, low-cost  
Streamlined design provides the smallest size and lowest cost of all water-cooled, amplifier built-in type sensors
- Robust and lightweight case  
Robust case capable of withstanding severe operating conditions such as heat, water and shock also offering light weight is employed.
- Fully prepared for external light disruption  
Unique circuitry ensures stable operation and high reliability under natural light of 300,000 lx or red-hot steel material of over 1,000 °C
- Excellent stability  
Received optical output about tenfold of operation level at detecting distance of 50 m ensures detection even with minor soiling of lens or in adverse environment.
- Optical sight convenient for alignment  
Both transmitter and receiver are provided with optical sight that facilitates light axis alignment
- Attachable airless dust hood or air purge hood  
Different types of airless dust hoods and air purge hoods are available for prevention of soiling of lens, etc.

# KL(R)50

## Rating/Performance/ Specification/ Environmental Specification

Model	KL(R)50	KL(R)50E
Detection method	Through-beam type	
Detecting distance	50m max.	
Light source	Infrared LED	
Power Supply	AC100-110V/200-220V ±10% 50/60Hz	
Power consumption	4W max	
Operation mode	Light-ON	
Output type	Relay output	Voltage output
Rating	1 transfer contact 200 VAC 0.5 A (resistance load)	DC 10V 5mA
Smallest detectable object	ø28mm	
Operating angle	5° min.	
Response time	25ms max.	5ms max.
Resistance to external light	300,000 lx	
Indication	Transmitter: power indicator (red LED); receiver: light reception indicator (red LED)	
Ambient temperature	-10 - +55 °C (150 °C max. with water-cooling)	
Ambient humidity	35 - 85%RH Max. (Non-condensing)	
Insulation resistance	500 VDC, 20 MΩ or higher (between primary side of transformer/output terminal and case)	
Dielectric withstanding	1,500 VAC for 1 minute (between primary side of transformer/output terminal and case)	
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction	
Shock	500 m/s <sup>2</sup> / 2 times each in 3 directions	
Protective structure	IP66	
Case material	Aluminum die-cast	
Connection	Terminal block (cord opening ground hub)	
Mass	Transmitter: 2kg max., receiver: 2kg max.	

### • Cooling water specification


Flow rate	2 l /minute min.
Temperature	+10 - +35°C
Withstand voltage	0.29MPa

### • Air purge specification (with optional part)


Flow rate	200 l /minute min.
Withstand voltage	0.98MPa

Air not required for use of airless dust hood.

## Distance-Output Characteristics (Typical example)




## Light Beam Width Characteristics (Typical example)




## Dimensions (in mm)

### Transmitter/receiver

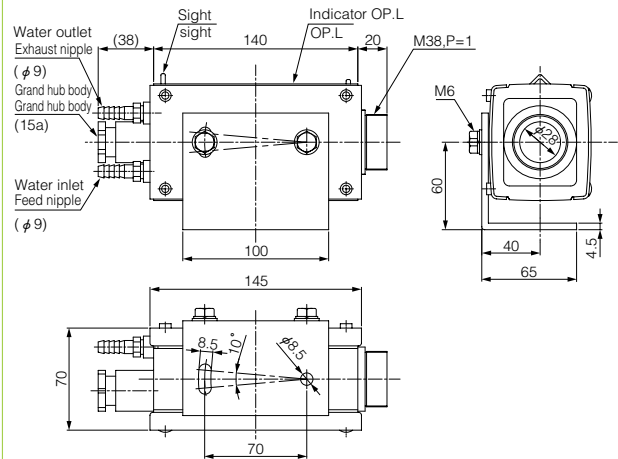


### • With Airless hood F38S Series attached

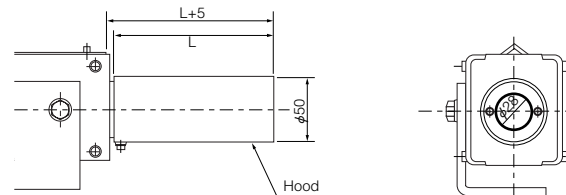


Model	Length (L)
F38S	120mm
F38S-03	300mm
F38S-04	400mm
F38S-05	500mm

### • With Airless hood F38N Series attached

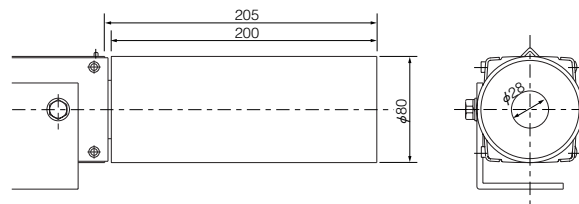


### • With air purge hood attached

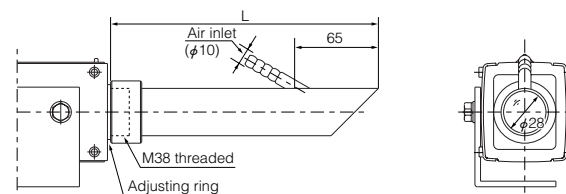

Model	Length (L)
302NC	215mm
303NC	315mm
304NC	415mm
305NC	515mm


High-powered light transmission capable of withstanding adverse environmental conditions. Optional parts available for a wide range of applications

Detecting distance: 50 m max.  
(NT50P)

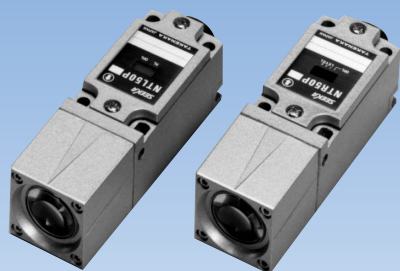

Model NT50  
Model NT50P

Detecting distance: 100 m max.  
(NT100P)

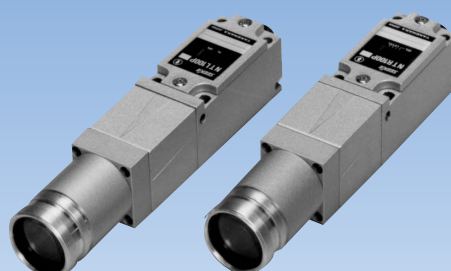

Model NT100  
Model NT100P


The NT50/100(P) Series sensors are high-powered CMDs designed to withstand severe operating environment (water, dust, etc.).

### Features

- Smallest size of long-distance sensors
- 3-point level indicator with margin for reliable detection  
The green LED is illuminated at a level 8 times as much as the operation level but the inherent performance of the emission is over tenfold.
- DIN compatible robust Zinc die-cast case
- Integrated light emission monitor circuit in transmitter  
Alarm signal is output if light emission stops in the unlikely event of failure.
- Operation mode selectable  
Operation mode is selectable between Light-ON and Dark-ON with the switch provided.


### Panel Description

#### Transmitter



- ① P.L. Indicator
- ② OP.L. Light emission monitoring operation indicator  
Illuminated when transmitter is functioning normally.

#### Receiver



- ① Light-ON/Dark-ON selector switch  
Set according to the situation
- ② Operation indicator  
Illuminated when output is activated.
- ③ Level indicator  
A set of 3 LEDs indicates stability.

## Rating/Performance/ Specification/ Environmental Specification

	Models	Set type	NT50	NT100	NT50P	NT100P
		Transmitter type	NTL50	NTL100	NTL50P	NTL100P
		Receiver type	NTR50	NTR100	NTR50P	NTR100P
Rating/Performance	Detection method	Through-beam				
	Detecting distance	50m	100m	50m	100m	
	Detection object	ø22mm min.	ø28mm min.	ø22mm min.	ø28mm min.	
	Power Supply	12-24VDC ±10% Ripple 10% max.		100 to 240V AC ±10% 50/60Hz		
	Current consumption / Power consumption	Transmitter: 30mA max. / Receiver: 35mA max.		Transmitter: 5W max. / Receiver: 5W max.		
	Output mode	NPN open collector Rating: sink current 200mA (30VDC) max.		Relay contact output 1C Rating: 250V AC 2A max. (resistance load)		
	Operation mode	Light-ON/Dark-ON selectable (with switch)				
	Light monitor		NPN open collector Rating: sink current 200mA (30VDC) max.		Relay contact output 1C Rating: 250V AC 2A max. (resistance load)	
		Power supply	ON OFF		ON OFF	
		Lighting	Normal (ON) Abnormal (OFF)		Normal (ON) Abnormal (OFF)	
Output	ON	ON		ON		
	OFF	OFF		OFF		
Safety margin output		NPN open collector Rating: sink current 200mA (30VDC) max.				
Response time		5ms max.		20ms max.		
Specification	Light source	Infrared LED (910nm)				
	Indicator	(Transmitter) P.L: Power indicator (Green LED) ... Illuminated when power-on OP.L: Monitor indicator (Red LED) ... Illuminated when emit light normally				
		(Receiver) OP.L: Operation indicator (Red LED) ...Illuminated when output-on				
		LEVEL: Level indicator (Three level display)				
		LEVEL1: yellow LED illuminated when light intensity of about twice as much as operation level is detected. LEVEL2: yellow LED illuminated when light intensity of about four times as much as operation level is detected. LEVEL3: green LED illuminated when light intensity of about eight times as much as operation level is detected.				
	Switch (SW)	Light-ON/Dark-ON selector switch provided	( Remove the case lid of the receiver to access the switch. )		Light-ON ... Output at light receiving	Dark-ON ... Output at light blocking
Case materials	Zinc die-cast					
Connection	Terminal block (screw: M3.5, width: 8.1mm)					
Mass	Transmitter:	about 700g	about 800g	about 700g	about 800g	
	Receiver:	about 700g	about 800g	about 700g	about 800g	

## Environmental Specification


Environment	Ambient light (on light receiving surface)	50,000 lx max. (incandescent lamp)	50,000 lx max. (incandescent lamp) 100,000 lx max. (sunlight)
	Ambient temperature	-25 - +55°C (Non-freezing)*	
	Storage temperature	-40 - +70°C (Non-condensing)	
	Ambient humidity	35 - 85%RH (Non-condensing)	
	Protective structure	IP66	
	Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction	
	Shock	1000 m/s <sup>2</sup> / 3 times each in 3 directions	500 m/s <sup>2</sup> / 3 times each in 3 directions
	Dielectric withstanding	500 VAC for 1 minute (between input/output and case)	2000 VAC for 1 minute (between input/output and case)
	Insulation resistance	500 VDC, 20 MΩ or higher	

\* Some models may be used in environment of up to 110°C by attaching water-cooling jacket.  
Contact Takex for details.


## Input/Output Circuit and Connection

NT50/NT100

(Transmitter)

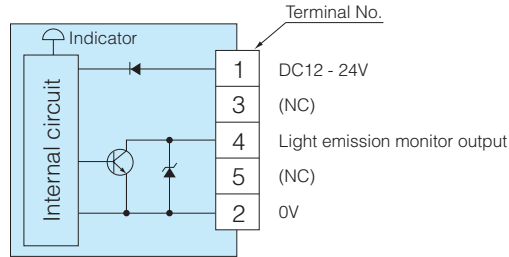


(Receiver)

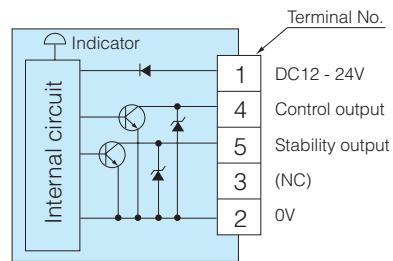


NT50P/NT100P

(Transmitter)

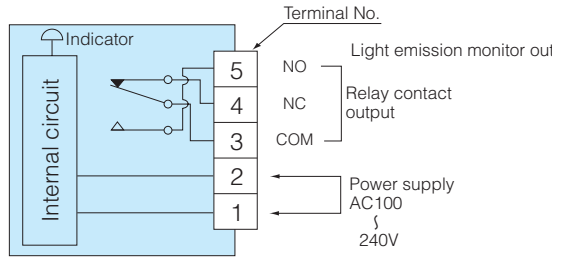

(Receiver)

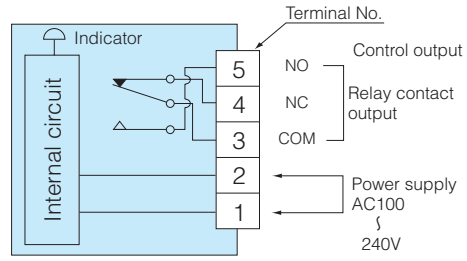


● Connection

For connection, use cables of 9-11 mm in diameter.


Loosen the screws on the lid of the body to remove the lid.

The rubber packing must be attached in the right orientation.

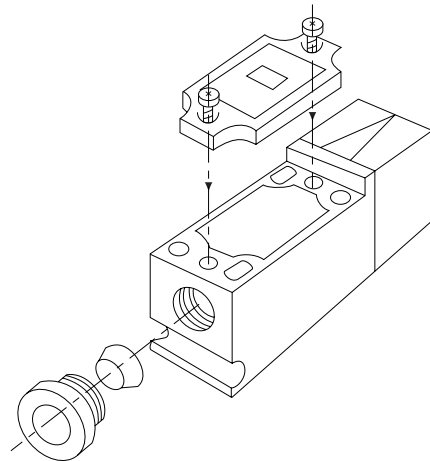


### Directional Characteristics (Typical example)

NT50 (P)




NT100 (P)




### Distance-Output Characteristics (Typical example)

NT50 (P)




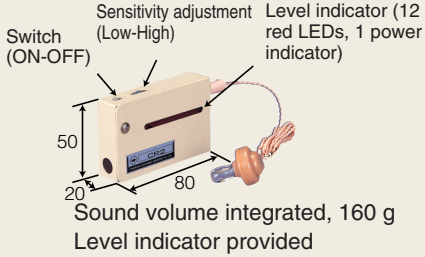
NT100 (P)



## Optional Parts

**Checker CR2** Used for aligning the light axis while observing the light emitted from the transmitter with "sound" and "level indicator." Find the light from the transmitter with the checker and adjust the orientation of the transmitter so that the receiver is installed at the center of the light.






Sound volume integrated, 160 g  
Level indicator provided

---


**Hood** (Applicable to NT50(P))

**Hood H301**




Energy-saving airless dust hood taking advantage of muffler effect for preventing soiling of lens.

**Airless hood F301**




Energy-saving airless dust hood taking advantage of muffler effect for preventing soiling of lens.

**Air purge hood A301**



Air purge hood for prevention of soiling of lens.

**Airless hood F38S** (Applicable to NT100(P))




Energy-saving airless dust hood taking advantage of muffler effect for preventing soiling of lens.

---

**Pinhole plate** (Applicable to NT50(P))

Use of pinhole plates reduces the smallest allowable detection object diameter and activation area. Note that the detecting distance is reduced as well.



Model	Pinhole diameter
30P1	ø1
30P3	ø3
30P5	ø5
30P7	ø7
30P10	ø10


(mm)

---


• **Directional Characteristics (Typical example)**

NT50(P): with pinhole plate (optional) attached to both transmitter and receiver

With 30P1/30P3 attached

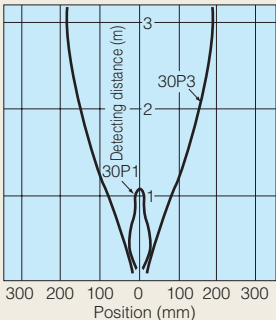


With 30P5/30P7/30P10 attached

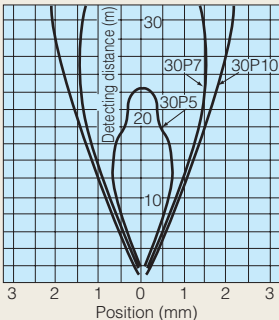

• **Distance-Output Characteristics (Typical example)**

NT50(P): with pinhole plate (optional) attached to both transmitter and receiver

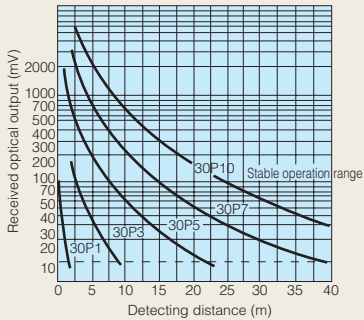

• **Installation**

For mounting, use a solid base not subject to vibration.


Use 2 M6 bolts for securing the sensor body (separately prepare bolts, nuts, washers, etc.).

## Dimensions (in mm)

Model NT50

NT50P


CAD

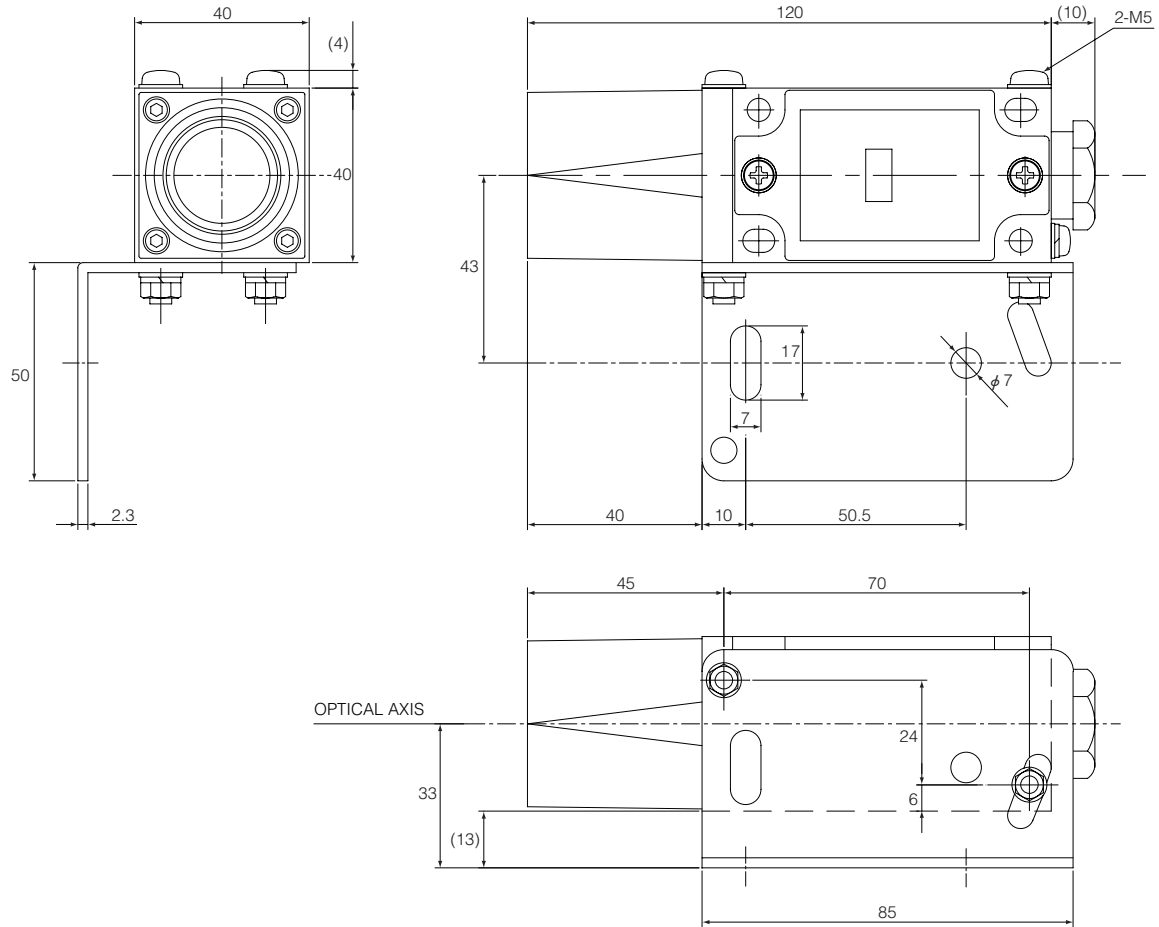

## Hoods (optional)


H301 (hood)

CAD

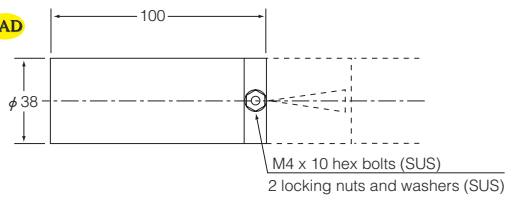


A301 (air purge hood)

CAD

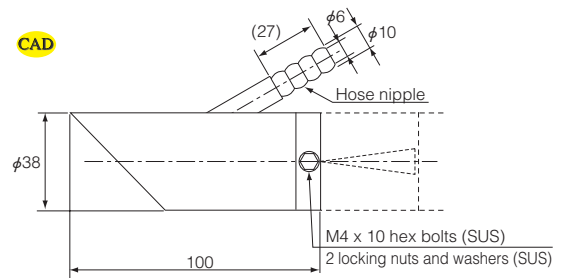

F301 (Airless hood)

CAD

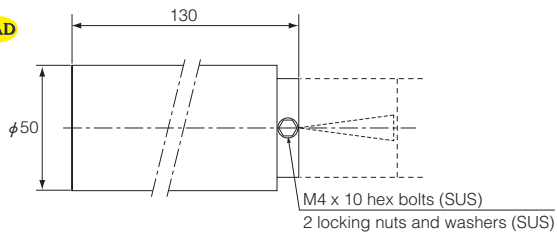

**Air purge specification**  
 Flow rate···200 l/min  
 Withstand pressure···0.98MPa




## Dimensions (in mm)

Model NT100


NT100P

CAD

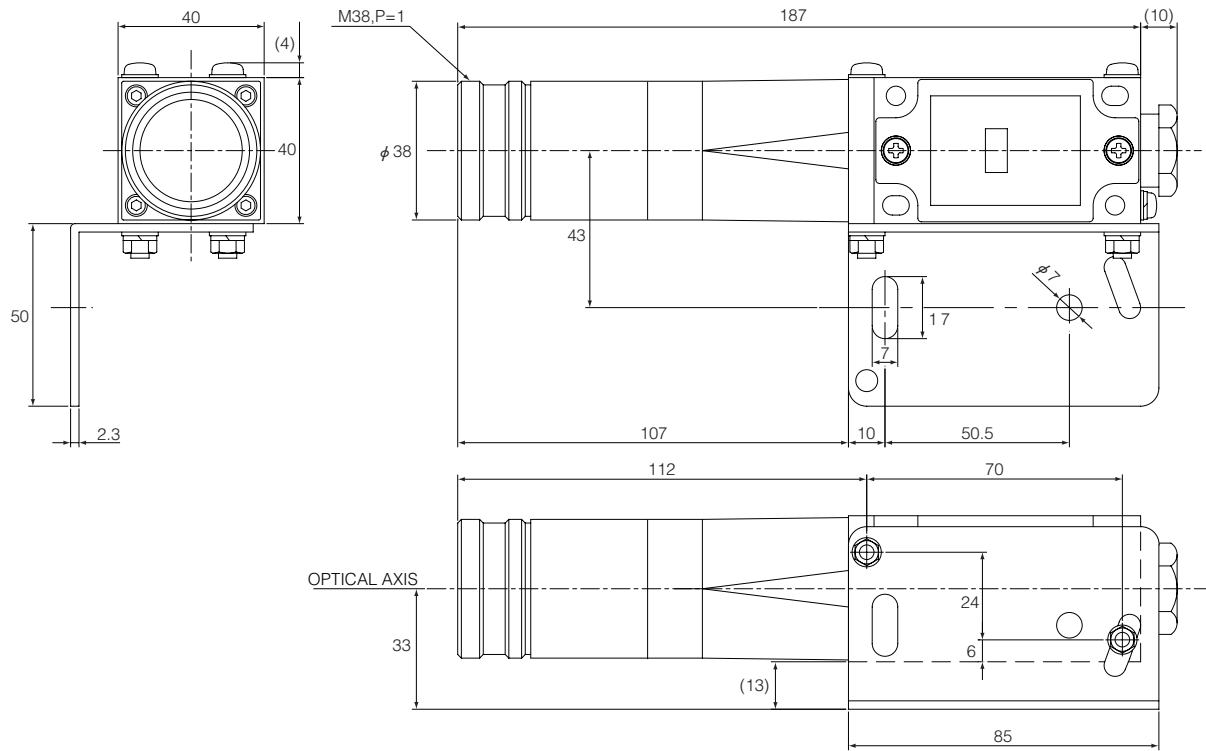

With F38S Airless hood (optional) attached

CAD

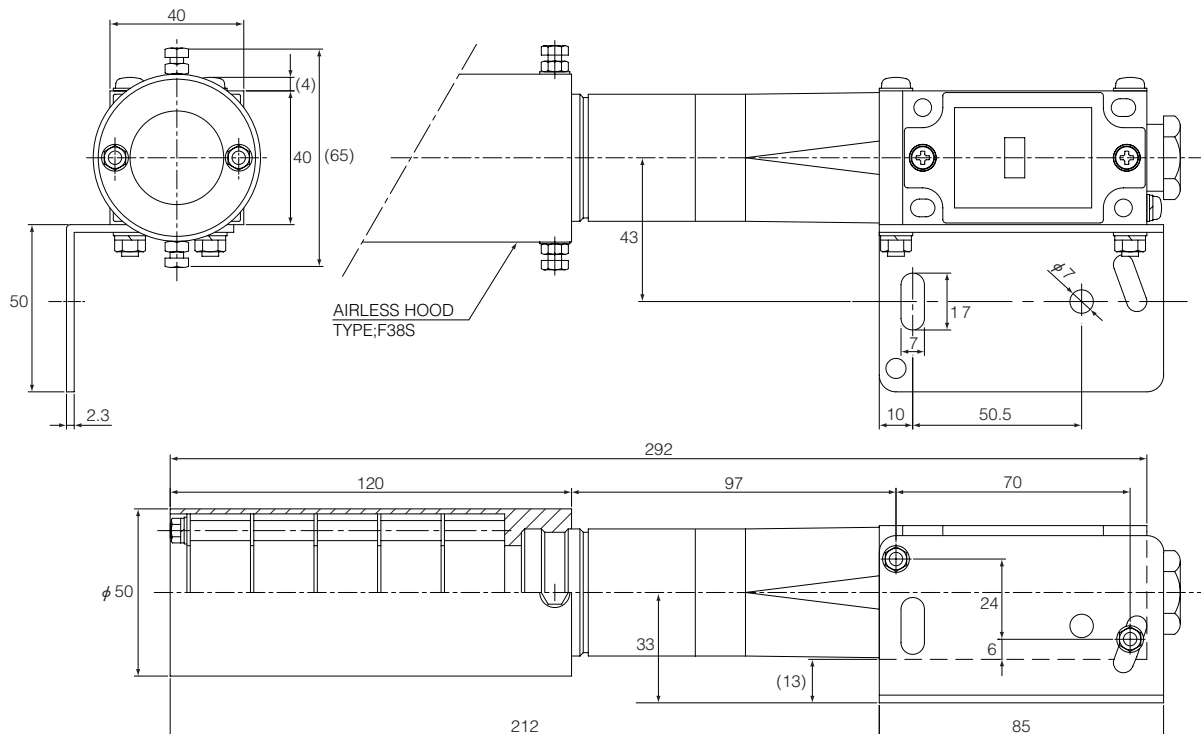


High sensitivity provides reliable detection of  $\varnothing 8$  hole

For single hole

Transmitter SWD55L

Receiver SWD55R

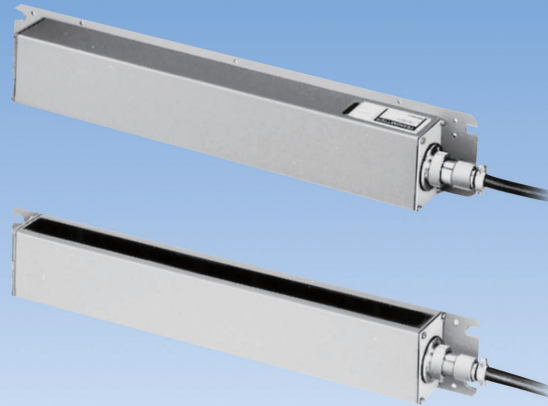

## Controller SWD55B



With case



Without case

## Features

- Excellent reliability  
High performance characterized by the smallest detectable hole diameter of 8 mm and margin in operation of over 30 times as much as operation level for transmitter and receiver circuits ensures detection even with minor soiling of lens.
- Simple light axis alignment  
Transmitter and receiver are provided with devices exclusively for light axis alignment and lamps are illuminated when the light axis is aligned, facilitating accurate alignment.
- Superb Vibration and waterproofing  
Case and structure time-tested in press safety sensors are employed for transmitter and receiver, withstanding adverse environment.
- Streamlined circuit design has further reduced power consumption. Unitization of transmitter and receiver has achieved about 50-% reduction of size from the conventional model.
- Air purge hood or water-cooling jacket can be attached as required.


## Rating/Performance/ Specification (Transmitter/Receiver)

Model	SWD55L · SWD55R
Detecting distance	Between transmitter and receiver L=400-1000mm
	Between transmitter and coil L1=200mm min.
	Between receiver and coil L2=200mm min.
Light source	Infrared LED
Light-sensitive element	Silicon phototransistor
Effective detecting width	300mm
Ambient temperature	-10 - +55 °C (Non-freezing/ Non-condensing)
Insulation resistance	500 VDC, 20 MΩ or higher (between power supply and case)
	500 VDC, 20 MΩ or higher (between output and case) (receiver only)
Dielectric withstanding	500 VAC for 1 minute (between power supply and case)
	500 VAC for 1 minute (between output supply and case) (receiver only)
Connection	Metal connector (cord not provided)
Protective structure	IP66
Mass	Transmitter: about 3kg, receiver: about 3kg max.
Power Supply	Supplied by controller

## (Controller)

Model	SWD55B
Output	Relay contact 1c and open collector output (Light-ON)
Output rating	Relay contact: 250 VAC 5 A (resistance load) Open collector output: 48 VDC 75 mA max., transistor activated for output
Operation	One-shot output, duration variable between 0.1 and 1 second
Response time	25ms max
Power supply	100-110 VAC or 200-220 VAC (Normal-rated voltage: +10%/-15%, 50/60 Hz)
Power consumption	20W max.
Ambient temperature	-10 - +55 °C (Non-freezing/ Non-condensing)
Insulation resistance	500 VDC, 20 MΩ or higher (between power supply/output and case)
	500 VDC, 20 MΩ or higher (between power supply and output) (receiver only)
Dielectric withstanding	1,500 VAC for 1 minute (between power supply/output and case)
	1,500 VAC for 1 minute (between power supply and output)
Connection	Terminal block
Protective structure	IP40 (with case)
Mass	About 8.7kg

## Dimension (in mm) (in mm; for controller, see P.551)

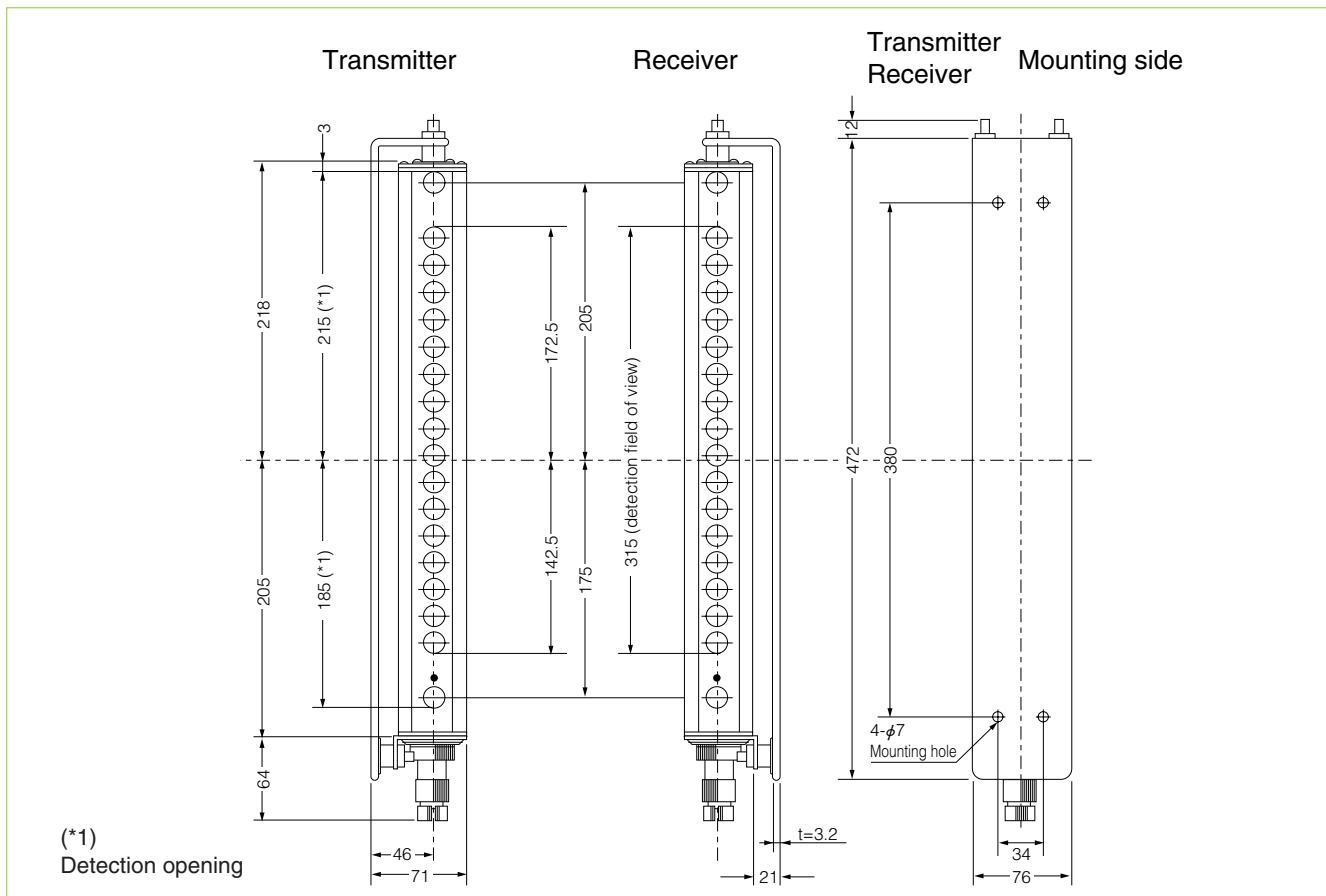

# SWD60(E)


Punch hole detection sensor

Self-check feature integrated

Transmitter SWD60T

Receiver SWD60R (E)

For single- and double-hole detection

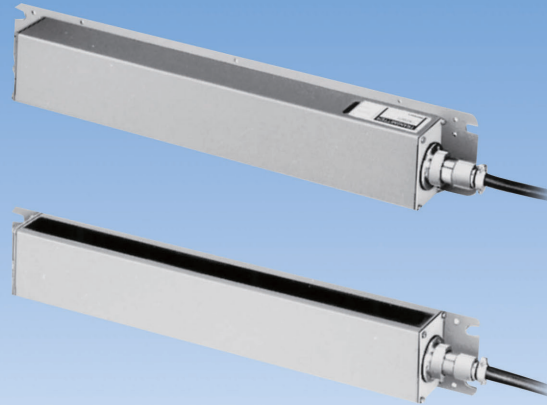

## Controller SWD60B



With case



Without case

Air purge unit or water-cooling jacket can be optionally attached to the transmitter and receiver.

Air purge unit: model AP60ET (for transmitter)

AP60ER (for receiver)

Water-cooling jacket: model WJ60E (for transmitter/receiver)

- Edge processing feature available (separate model)  
For plate width narrower than effective detecting width of the sensor, receiver provided with an edge processing feature is available.  
Receiver model: SWD60RE

## Features

- Differentiation between single and double holes  
One set of sensor is capable of differentiation between single and double holes, generating various types of output signals
- Simple light axis alignment  
When light is fully received (nothing in the detection area between the transmitter and receiver), the AMP gain of the receiver is reduced to about 1/10 of the ordinary detection of punch holes. When the light axis is aligned in this condition, the SAFETY lamp on the receiver is illuminated.
- Self-check feature  
The transmitter is provided with light emission monitor circuit, which checks for any abnormality in light emission and outputs alarm signal accordingly. The receiver allows external checking of whether it is functioning normally.  
When light is fully received, the AMP gain of the receiver is automatically reduced to about 1/10. If the receiver detects full light reception in this condition, the SAFETY lamps on the receiver and controller are illuminated, indicating that the received light intensity level has a margin of more than tenfold.


## Rating/Performance/ Specification (Transmitter/Receiver)

Detecting distance	250-1,000 mm between transmitter and receiver (500 mm recommended)
Detecting range within detecting distance	<p>(Ex.) Detecting range at detecting distance of 500 mm: 150 mm on both sides from the center</p>
Effective detecting width	470mm
Light source	Infrared LED
Light-sensitive element	Silicon photodiode
Power supply	Supplied by controller (24 VDC (20-30 V), ripple 10% max.)
Current consumption	Transmitter: 280 mA max.; receiver: 210 mA max.
Ambient temperature	-25 - +55 °C (80 °C max. with water-cooling)
Storage temperature range	-40 - 70°C (Non-freezing)
Ambient humidity	35 - 85%RH (Non-condensing)
Vibration	10-55 Hz / 1.5 mm amplitude / 2 hours each in 3 direction
Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions
Connection	Metal connector (cord length: 2 m)
Protective structure	IP66
Mass	Transmitter: about 2.6 kg (including 2-m cord) Receiver: about 2.9 kg (including 2-m cord) Air purge unit: about 0.3 kg Water-cooling jacket: about 1.7 kg.

## (Controller)

Control output	Single-hole detection output	Relay contact 1c and NPN open collector output (floating)
	Double-hole detection output	Relay contact 1c and NPN open collector output (floating)
	Output rating	Relay contact: 250 VAC 5 A (resistance load) NPN Open collector output: 30VDC 100mA.
Operation mode	Operation mode	One-shot output; duration variable between 0.1-1 second (adjustment volume on panel)
	Response time	Relay contact: 30 ms max. NPN Open collector output: 3ms max.
SAFETY output	Output rating	Relay contact 1a 250 VAC 5 A (resistance load)
	ALARM output operation mode	
Receiver check input	Output rating	Relay contact 250VAC 5A (resistance load)
Power supply	Receiver check input	a (normally-open) contact input (short-circuiting of Terminals 9 and 10)
Power supply	Power supply	100, 110, 200 or 220 VAC (rated voltage: -15+10%, 50/60 Hz)
Power consumption	Power consumption	30W max.
Ambient temperature	Ambient temperature	-25 - +55 °C (non-freezing)
Storage temperature range	Storage temperature range	-40 to 70°C (Non-condensing)
Ambient humidity	Ambient humidity	35 - 85%RH max. (Non-condensing)
Dielectric withstanding/ Insulation resistance	Between power supply and case	1,500 VAC for 1 minute 20 MΩ or higher (with 500 VDC megohmmeter)
	Between relay contact output and case	
	Between relay contact output and power supply	
Vibration	Between open collector output and case	1,000 VAC for 1 minute 20 MΩ or higher (with 250 VDC megohmmeter)
	Between open collector output and power supply	
	Between open collector output and power supply	
Shock	Shock	500 m/s <sup>2</sup> / 3 times each in 3 directions
Connection	Connection	Terminal block
Protective structure	Protective structure	IP40 (with case)
Mass	Mass	About 9kg


## Dimension (in mm)

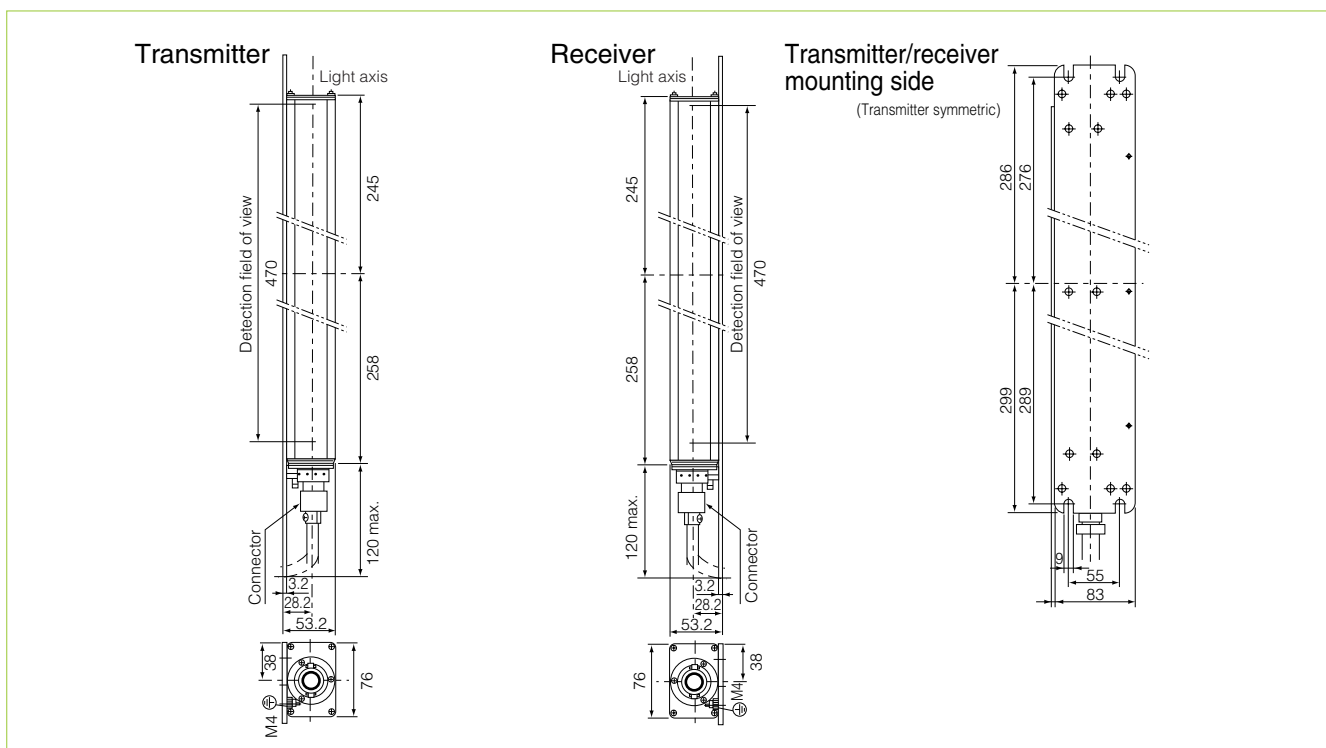


# SWD60

## Dimensions (in mm; transmitter/receiver)


- With air purge unit and water-cooling jacket attached

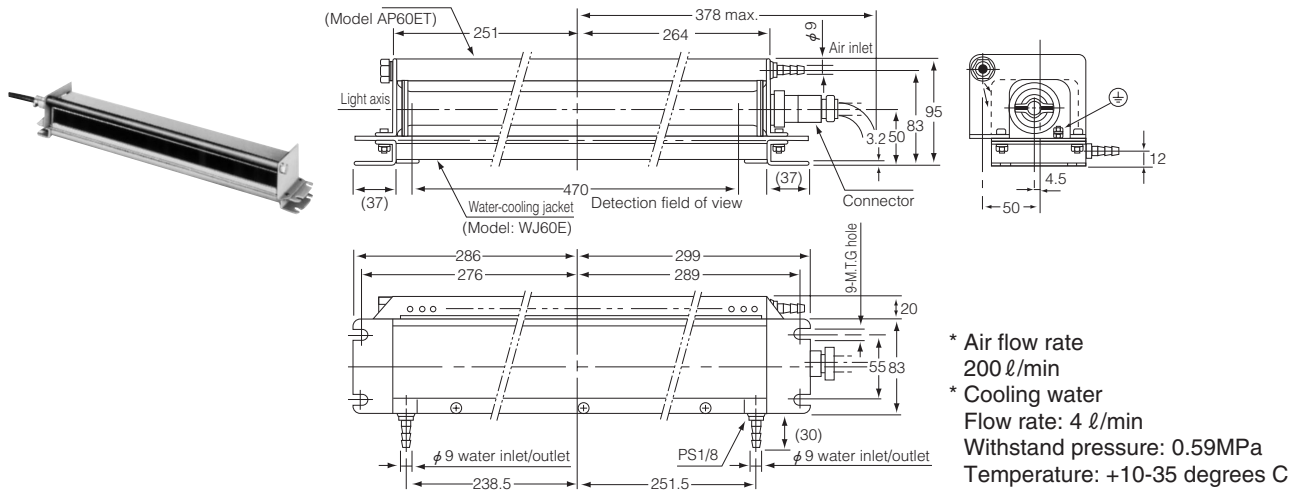

- With air purge unit attached

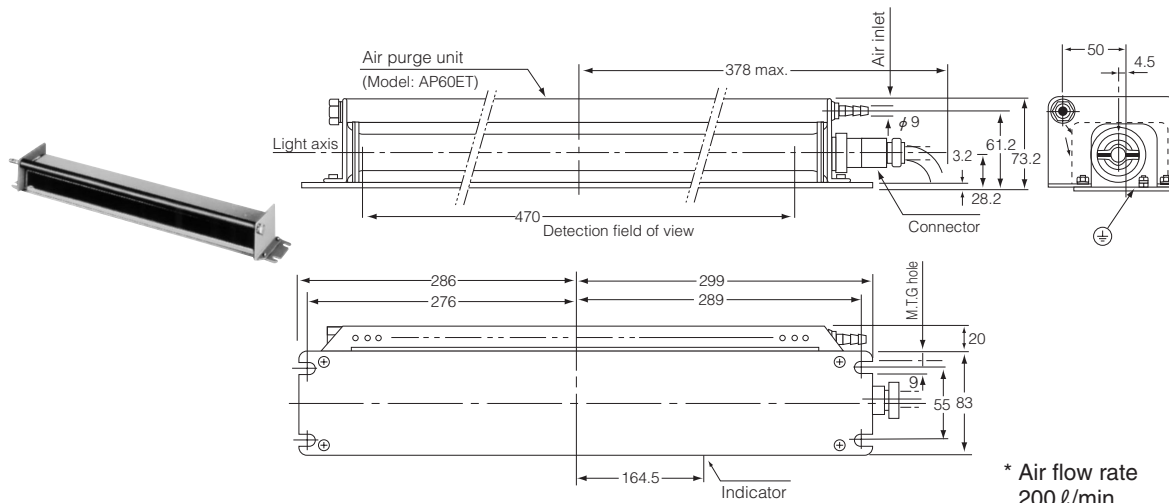


- With water-cooling jacket attached

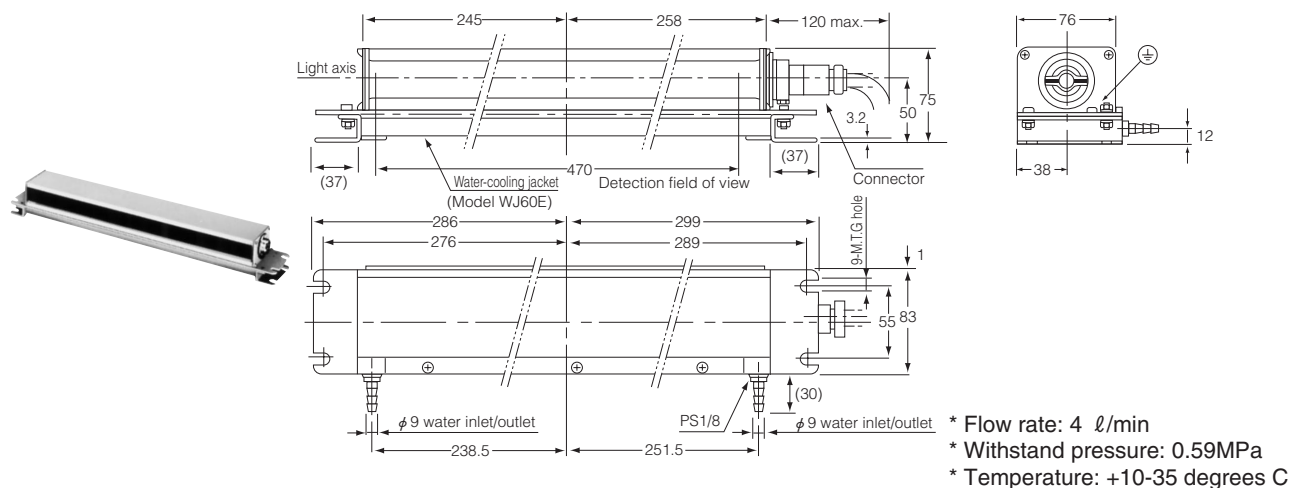


## Dimensions (in mm; controller SWD55/SWD60)

### With case

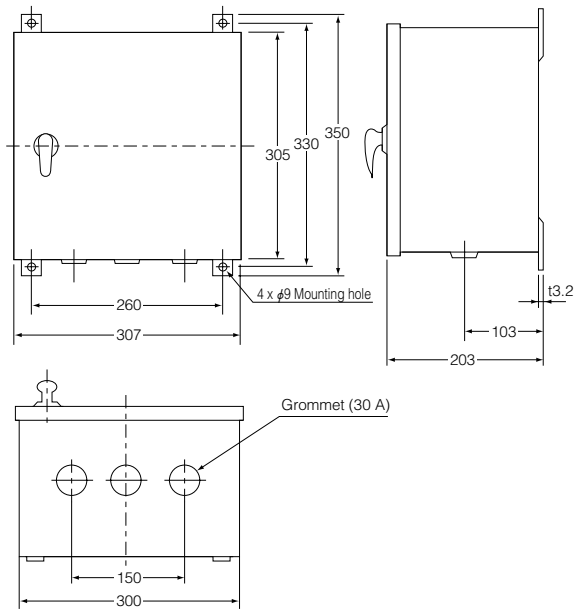

### Without case

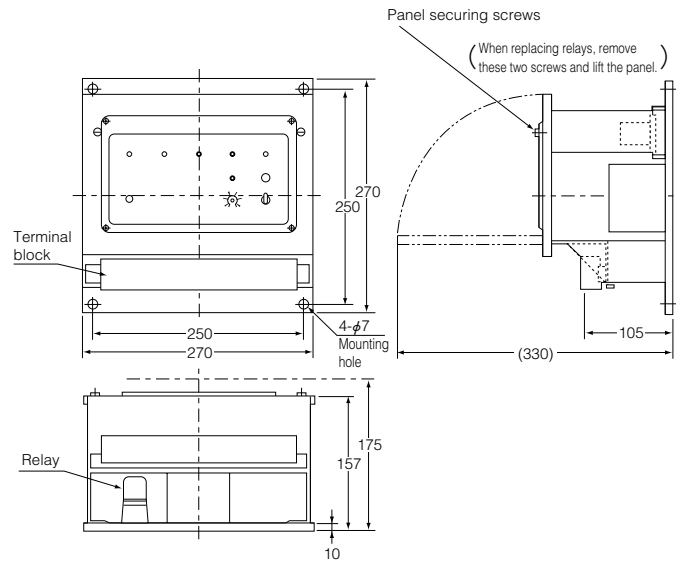


## Basic Knowledge about Semiconductor Laser Photo Sensors

### 1. Laser types and applications

Types of laser include gas laser, solid-state laser, semiconductor laser, etc., of which He-Ne laser (for detection of objects moving at high speeds, detection of flaws, defects, marking, etc.) and semiconductor laser (laser diode) are used for photo sensors.

### 2. Semiconductor laser (laser diode)

In terms of light emission, semiconductor laser is based on a similar principle to that of LEDs. For this reason, light emission output depends on the driving current (Figure 1). At small current, laser emits light based on the same principle as that of LEDs (power as low as LEDs). When the current value exceeds a certain level (threshold current), however, the optical power rapidly increases. This phenomenon is called laser oscillation (Figure 2).

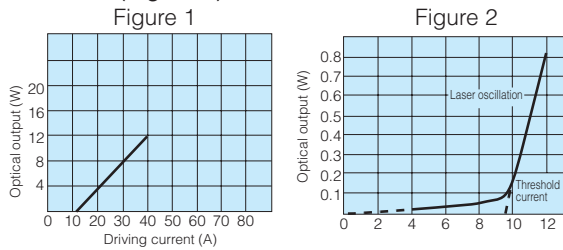

Types of semiconductor laser include laser for continuous oscillation used for optical communication, audio, etc. and laser for pulsed oscillation used in photo sensors.

Optical output is a few mW for laser for continuous oscillation. Laser for pulsed oscillation emits light of extremely short time with a pulse width of 100 nsec and provides several-to-100 W.


Laser beam is characterized by monochromatic spectrum and continuous wave (coherence) as well as high output.

Photo sensors take advantage of the latter property: high power. This allows semiconductor laser CMDs to be used in atmosphere that does not allow use of LED type CMDs.

### 3. Laser diode and modulation frequency used in KL/R44A(HP), FT44/441A

	KL44A FTL441A	KL44A-HP FTL44A
Optical peak output	10W	90W
Peak wavelength	904nm	
Modulation frequency	500Hz	

$$\begin{aligned} \text{Duty ratio} &= \frac{100\text{nsec}}{2\text{msec}} \\ &= 0.005\% \end{aligned}$$




### 4. Life of laser diode

Service life of laser diode depends on the operating conditions. Generally, optical output is reduced to about 80% when used at the maximum rating for about 1,000 hours.

Takex's laser CMDs are driven at about 60% of the maximum rating and the service life may be generalized as shown in the figure based on the operating conditions and past results.

Reduction of optical output (emission efficiency) applies to LEDs as well.

With a laser diode, if the optical output is reduced to 80%, it is incomparably higher than that of an LED and received light intensity level has a sufficient margin, which poses no problem in the actual use. Takex's CMDs integrate a light emission monitor circuit in the transmitter for constantly high optical output (large margin in operation), which outputs an alarm signal when the optical output is reduced to 80% of the initial value.

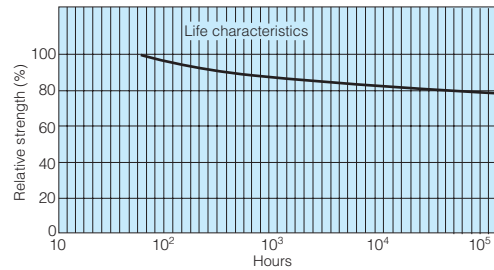

### 5. Use in adverse environment

#### (1) Heating furnace

If the atmosphere in the furnace is clean without flame, CMDs that employ LED as the light source serves the purpose. If partial combustion generates flame that blocks the light axis, light from the transmitter is absorbed by the flame and the received light intensity is greatly reduced.

Especially, any black smoke generated absorbs significant amount of light and CMDs with LED will be in a light blocking state.

CMDs with laser diode used as the light source compensate for this absorption with the high output of the light source and minor black smoke poses no problem at all.

#### (2) Vapor

Vapor causes absorption and irregular reflection. Ordinary photo sensors emit light beam that penetrates tens of meters under water and absorption can be disregarded.

Vapor irregularly reflects all types of light and even laser beam is not perfectly insusceptible of this effect in that it has properties of light. If a large amount of vapor is present as in descaling spray, sensors that use near-infrared ray virtually cannot be used.

For this reason, be sure to conduct a test to check the operation in a situation subject to vapor.

### 6. Safety measures

Safety measures according to JIS C 6802 "Safety of Laser Products," etc. must be taken. See "Notes on Safety" on p. 516, "Laser Safety Standards" on p. 853, etc.



代理以下品牌:

- ◇日本山武 YAMATAKE/azbil      ◇台湾阳明 FOTEK      ◇美国霍尼韦尔 HONEYWELL
- ◇日本竹中 TAKEX/SEEKA   ◇日本大仓 OHKURA   ◇ASEE 安圣光纤线专业生产厂
- ◇日本基恩斯 KEYENCE      ◇日本理研 RIKEN 光幕/镜片 ◇台湾 moujen

记录仪:大仓 OHKURA, 山武 YAMATAKE   千野 CHINO,神港 SHINKO,东邦 TOHO,横河 YOKOGAWA  
安全光幕: 安圣 ASEE, SSG20 对射光幕, 神视 SUNX, 阳明 fotek, 理研 RIKEN   鲜光 SUN KWANG  
光纤放大器:山武 YAMATAKE   竹中 TAKEX   神视 SUNX,基恩斯 KEYENCE 阳明 fotek   奥托尼克斯

主营产品: 安全光幕、记录仪、光纤放大器、光纤线、接近开关、光电开关、行程开关、计数器、计时器、温控器、固态继电器、热电偶、PT100 热电阻、燃烧保护继电器、火焰检测器、PLC、变频器、触摸屏、步进电机及驱动器、各国进口品牌记录纸、色带、记录笔

欢迎访问我公司网站:[www.Lanseanet.com](http://www.Lanseanet.com)

深圳市创丰机电设备有限公司

深圳市宝安九区澎柏白金酒店商务大厦 917 室

手机:13143436561    直线: 0755-81642429

传真: 0755-61658146

联系人:钱军辉

网址 [www.Lanseanet.com](http://www.Lanseanet.com)      E-mail:sensorschina@126.com

服务 QQ:50827480      MSN:qianqun@163.com