

MVK+MPNIO DI8 DI8 IRT推拉

金属电偶分离技术

数字输入

DI8

DI8(IRT)

以太网10/100Mbit/s; 推挽RJ45数据连接器推挽电源连接器, 最大。12 A


M12, 5极A编码电

流隔离

连接电缆在“连接技术”下的网店。房屋全盆栽。

链接到产品

Illustration

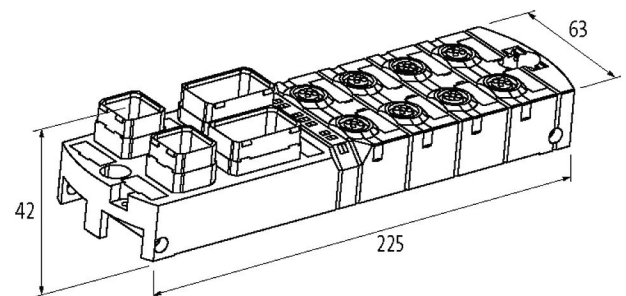

产品可能与图像不同

Approvals



2-hole 安装方法螺钉安装

温度范围0...+55°C (储存温度-20...+70°C)

IP67保护

More Info



尺寸H×W×D 42.7×63×225mm

Input

General data

这本小册子中的信息是极其谨慎地编写的。

对信息的正确性、完整性和时事性的责任仅限于重大过失。版本: 07/21



stay connected

	传感器电源US24 V DC (EN 61131-2),最大。200毫安(M12母), 短路和过载保护
	3线传感器或机械开关
Parameterization	
	Input针4
	Input针2
Connections	
	现场总线以太网10/100Mbit/s; 推挽式RJ45数据
	连接器传感器-系统/执行器供应器拉力连接器, 最大。12 A
	I/O portsM12, 5极, A编码
PROFINET	
	特异性V2.2, 符合性C级(IRT)
	DCP寻址
	FSU (快速启动) 最大值。500毫秒
	PROFINET Netload分类
	yesMRP
	yes,2个控件的共享设备
Diagnostic	
	通信状态
	通过分类帐模块和通道进行诊断
	通过总线模块和通道进行诊断
	执行器通过LED和总线每通道报警
	yes监测-欠压
	yes监控-无电压
	短路和过载
	per电缆断口
Commercial data	
	DE原产国
	关税号码85389099



stay connected

EAN	4048879461672
eClass	27242604
Packaging unit	1.000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 07/21