

Thermocouple Tolerances

(Reference Junction at 0°C)

American Limits of Error ASTM E230-ANSI MC 96.1

ANSI Code		Standard Limits†		Special Limits†	
J	Temp Range	>0 to 750°C	>32 to 1382°F	0 to 750°C	32 to 1382°F
	Tolerance Value	2.2°C or 0.75%	4.0°F or 0.75%	1.1°C or 0.4%	2.0°F or 0.4%
K	Temp Range	>0 to 1250°C	>32 to 2282°F	0 to 1250°C	32 to 2282°F
	Tolerance Value	2.2°C or 0.75%	4.0°F or 0.75%	1.1°C or 0.4%	2.0°F or 0.4%
	Temp. Range*	-200 to 0°C	-328 to 32°F		
	Tolerance Value	2.2°C or 2.0%	4.0°F or 2.0%		
T	Temp Range	>0 to 350°C	>32 to 662°F	0 to 350°C	32 to 662°F
	Tolerance Value	1.0°C or 0.75%	1.8°F or 0.75%	0.5°C or 0.4%	1°F or 0.4%
	Temp. Range*	-200 to 0°C	-328 to 32°F		
	Tolerance Value	1.0°C or 1.5%	1.8°F or 1.5%		
E	Temp Range	>0 to 900°C	>32 to 1652	0 to 900°C	32 to 1652°F
	Tolerance Value	1.7°C or 0.5%	3°F or 0.5%	1.0°C or 0.4%	1.8°F or 0.4%
	Temp. Range*	-200 to 0°C	-328 to 32°F		
	Tolerance Value	1.7°C or 1.0%	3°F or 1.0%		
N	Temp Range	>0 to 1300°C	>32 to 2372°F	0 to 1300°C	32 to 2372°F
	Tolerance Value	2.2°C or 0.75%	4.0°F or 0.75%	1.1°C or 0.4%	2.0°F or 0.4%
	Temp. Range*	-270 to 0°C	-454 to 32°F		
	Tolerance Value	2.2°C or 2.0%	4.0°F or 2.0%		
R S	Temp Range	0 to 1450°C	32 to 2642°F	0 to 1450°C	32 to 2642°F
	Tolerance Value	1.5°C or 0.25%	2.7°F or 0.25%	0.6°C or 0.1%	1°F or 0.1%
B	Temp Range	800 to 1700°C	1472 to 3092°F		Not Established
	Tolerance Value	0.5%	0.5%		
G*C*D*	Temp Range	0 to 2320°C	32 to 4208°F		Not Established
	Tolerance Value	4.5°C or 1.0%	9°F or 1.0%		

* Not official symbol or standard designation

† Whichever value is greater.


Note: Material is normally selected to meet tolerances above 0°C. If thermocouples are needed to meet tolerances below 0°C, the purchaser shall state this as selection of material is usually required.

IEC Tolerance Class EN 60584-2; JIS C 1602

IEC Code		Class 1	Class 2	Class 3††
J	Temp Range	-40 to 375°C	-40 to 333°C	Not Established
	Tolerance Value	±1.5°C	±2.5°C	
	Temp. Range	375 to 750°C	333 to 750°C	
	Tolerance Value	±0.4% Reading	±0.75% Reading	
K N	Temp Range	-40 to 375°C	-40 to 333°C	-167 to 40°C
	Tolerance Value	±1.5°C	±2.5°C	±2.5°C
	Temp. Range	375 to 1000°C	333 to 1200°C	-200 to -167°C
	Tolerance Value	±0.4%	±0.75% Reading	±1.5% Reading
T	Temp Range	-40 to 125°C	-40 to 133°C	-67 to 40°C
	Tolerance Value	±0.5°C	±1°C	±1°C
	Temp. Range	125 to 350°C	133 to 350°C	-200 to -67°C
	Tolerance Value	±0.4% Reading	±0.75% Reading	±1.5% Reading
E	Temp Range	-40 to 375°C	-40 to 333°C	-167 to 40°C
	Tolerance Value	±1.5°C	±2.5°C	±2.5°C
	Temp. Range	375 to 800°C	333 to 900°C	-200 to -167°C
	Tolerance Value	±0.4% Reading	±0.75% Reading	±1.5% Reading
R S	Temp Range	0 to 1100°C	0 to 600°C	Not Established
	Tolerance Value	±1°C	±1.5°C	
	Temp. Range	1100 to 1600°C	600 to 1600°C	
	Tolerance Value	±[1 + 0.3% x (Rdg-1100)]°C	±0.25% Reading	
B	Temp Range	Not Established	600 to 1700°C	600 to 800°C
	Tolerance Value		±0.25% Reading	+4°C
	Temp. Range			800 to 1700°C
	Tolerance Value			±0.5% Reading

†† Material is normally selected to meet tolerances above -40°C. If thermocouples are needed to meet limits of Class 3, as well as those of Class 1 or 2, the purchaser shall state this, as selection of material is usually required.

一: [Omega热电偶连接器](#)

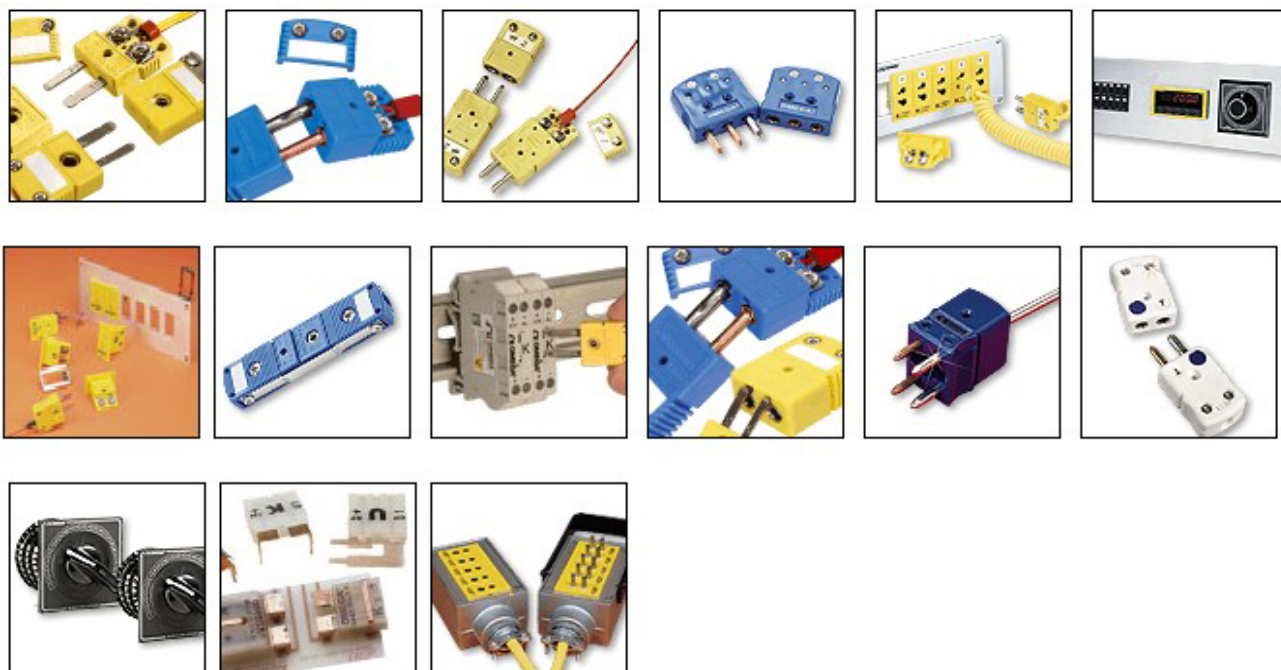

二: [Omega热电偶线及热电偶补偿导线](#)



三: [Omega热电偶](#)



深圳市鑫博恒业科技有限公司

地址: 深圳市福田区华强北都会大厦 B 座 27S

直线: 0755-82736276 83987276 82768776 FAX:0755-83041664

[Http://www.xb5j.com](http://www.xb5j.com) E-mail:info@xb5j.cn