# **NMG Series**

Isolated 2W Single Output DC/DC Converters



# - NMG05055C XYWW

#### **FEATURES**

- RoHS compliant
- Efficiency from 81%
- Wide temperature performance at full 2 Watt load, -40°C to 85°C
- UL 94V-0 package material
- Industry standard pinout
- 1kVDC isolation
- 5V & 12V input
- 5V, 9V, 12V, & 15V output
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- MTTF up to 3.9 million hours
- Pin compatible with NMR series
- No electrolytic or tantalum capacitors

#### **PRODUCT OVERVIEW**

The NMG series of DC/DC Converters is particularly suited to isolating and/or converting DC power rails. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist. The wide temperature range guarantees startup from  $-40^{\circ}$ C and full 2 watt output at 85°C. Pin compatibility with the NMR series ensures ease of upgradeability.



#### SELECTION GUIDE

-											
Nominal Input Voltage	Output Voltage	Output Current	Input Current at Rated Load	Load Regulation (Typ)	Load Regulation (Max)	Ripple & Noise (Typ) <sup>1</sup>	Ripple & Noise (Max) <sup>1</sup>	Efficiency (Min.)	Efficiency (Typ.)	Isolation Capacitance	MTTF <sup>2</sup>
V	V	mA	mA	9	6	mV	р-р	%	%	pF	kHrs
5	5	400	470	5.7	7.3	28	35	81	83	33	3956
5	9	222	455	4.2	5.9	20	25	84	86.5	40	3682
5	12	167	450	3.8	5.1	18	25	85	87.5	40	3299
5	15	133	450	3.4	4.5	16	25	85	87.5	40	2833
12	5	400	200	4.2	4.9	22	35	81	83.5	40	2519
12	9	222	190	2.6	3.1	16	25	83	87	61	2405
12	12	167	190	2.4	2.9	13	25	85	88	74	2235
12	15	133	185	2.0	2.4	12	25	85	88	68	2011
	V S S S S S S S S S S S S S S S S S S S	Nontiage Notta	though unulationthough solutionthough unulationVVmAVVmA55400592225121675151331254001292221212167	truly totagetruly totagetruly totageNuminal numinal NuminalNuminal numinal Numinal <br< td=""><td>Indul guildeImage<td>Indulucium hunding hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hu</td><td>Indul public with the p</td><td>Induliation Interpretation Interpreta</td><td>Induling hundling hu</td><td><math display="block"> \begin{array}{cccccccccccccccccccccccccccccccccccc</math></td><td>Induliability It <thit< th=""> It It</thit<></td></td></br<>	Indul guildeImage <td>Indulucium hunding hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hu</td> <td>Indul public with the p</td> <td>Induliation Interpretation Interpreta</td> <td>Induling hundling hu</td> <td><math display="block"> \begin{array}{cccccccccccccccccccccccccccccccccccc</math></td> <td>Induliability It <thit< th=""> It It</thit<></td>	Indulucium hunding hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hunding hundingInterpresent hu	Indul public with the p	Induliation Interpretation Interpreta	Induling hundling hu	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Induliability It <thit< th=""> It It</thit<>

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	
Reflected ripple current			7.5	15	mA p-p

ABSOLUTE MAXIMUM RATINGS	
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	550mW
Input voltage V <sub>IN</sub> , NMG05 types	7V
Input voltage VIN, NMG12 types	15V

OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated Power	T <sub>A</sub> =-40°C to 85°C			2	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN		1.05	1.2	%/%

ISOLATION CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 1000VDC	10			GΩ

GENERAL CHARACTER	ISTICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency			60		kHz

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	-40		85	
Storage		-50		125	
Case Temperature above ambient	NMG0505			30	°C
	NMG1205			25	
	All other output types			20	
Cooling	Free air convection				

1. See Ripple & Noise characterisation method.


2. Calculated using MIL-HDBK-217F FN2 with nominal input voltage at full load.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

### muRata Ps Murata Power Solutions

# **NMG Series**

#### Isolated 2W Single Output DC/DC Converters

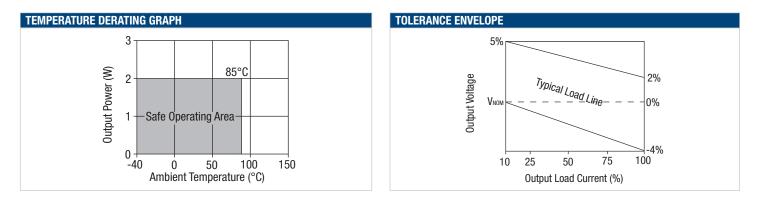

#### **TECHNICAL NOTES**

#### **ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMG series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 minute.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMG series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

#### **REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMG series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

#### **RoHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. This series are backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs



## **NMG Series**

Isolated 2W Single Output DC/DC Converters


#### **RIPPLE & NOISE CHARACTERISATION METHOD**

All measurement to be taken with the following components connected to the UUT as detailed below.


50 Ohm coax cable, solder connections one end, BNC plug at the other end.

- C1 1µF X7R multilayer ceramic capacitor rated at minimum 3 x the output voltage of the UUT
- C2 10μF tantalum capacitor rated at minimum 1.5 x the output voltage of the UUT with ESR of less than 100 milliohms at 100 kHz e.g. AVX TPS series.
- C3 100nF multilayer ceramic capacitor, general purpose
- R1 -450 Ohm resistor, carbon film,  $\pm 1\%$
- R2 50 Ohm BNC termination
- T1 3T of the coax cable through a ferrite toroid eg Ferroxcube TN32/19/13-3E25

RLOAD - Resistive load at the UUT maximum rating. Connections via twisted wires.

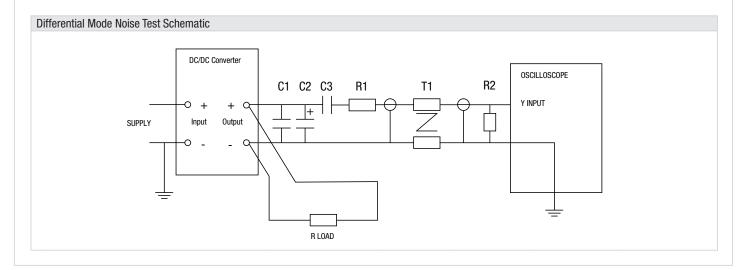

#### **EFFICIENCY VS LOAD**

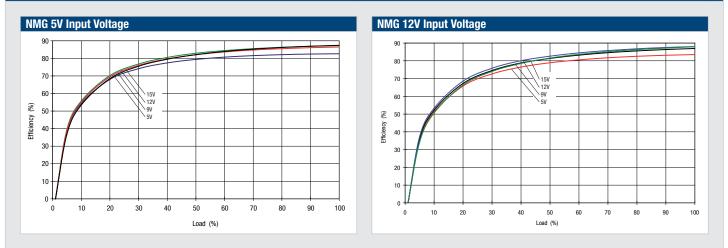


### muRata Ps Murata Power Solutions

## **NMG Series**

Isolated 2W Single Output DC/DC Converters


#### PACKAGE SPECIFICATIONS

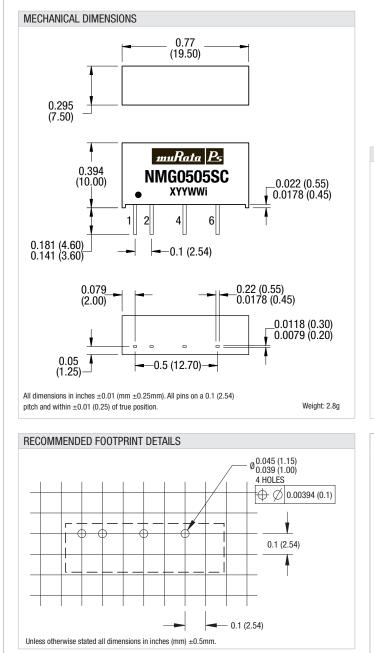

#### PIN CONNECTIONS - 4 PIN SIP

Pin	Function
1	+Vin
2	-VIN
4	-Vout
6	+Vout

#### TUBE OUTLINE DIMENSIONS



### muRata Ps Murata Power Solutions

Murata Power Solutions, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

USA:	Tucson (Az), Tel: (800) 547 2537, email: sales@murata-ps.com
Canada:	Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
Germany	: München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp
China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com

Technical enquiries email: mk@murata-ps.com, tel: +44 (0)1908 615232