

MicroTCA 1000W Power Module

PICMG MTCA-4 Standard

**Electrical Specification
 for:**

**Wide range AC/DC 16X12Vdc/7.6A &
 16x3.3Vdc/0.15A**

TelkoOR Part Number:

900-1142-0000



| | | | | | | | |
|----------|-------|--------------|------------|-------------|-------|-----|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 1 | OF 8 |

Power Module (PM) Description

The PS-1142 power module designed for use in uTCA system compliant to PICMG MicroTCA .4 Revision 1.0 Specification.

The PS-1142 Power Module is Double-Width form factor (187.2mm x 57.9 mm x 148.5mm) provide the functionality necessary to power, manage and protect an uTCA comprising up to:


- 12x Advanced Mezzanine Card (AMC)
- 2X MicroTCA Carrier Hub (MCH)
- 2X Cooling Unit (CU)

The PS-1138 PM Include Enhanced Module Management Controller (PM-EMMC) as Piggyback Card for management communications with the Carrier Manager using two IPMBs referenced as IPMB-A and IPMB-B .The aggregation of the two IPMBs is IPMB-0

The PM-EMMC aggregate IPMB-A and IPMB-B IPMI 1.5 Protocol, provide under command of the carrier manager:

- Enable and Provide Power to AMCs, CUs, and additional MCHs
- Monitor and Report power system status
- Manage and Isolated fault affecting the power system.

Power Module Basic Functionality

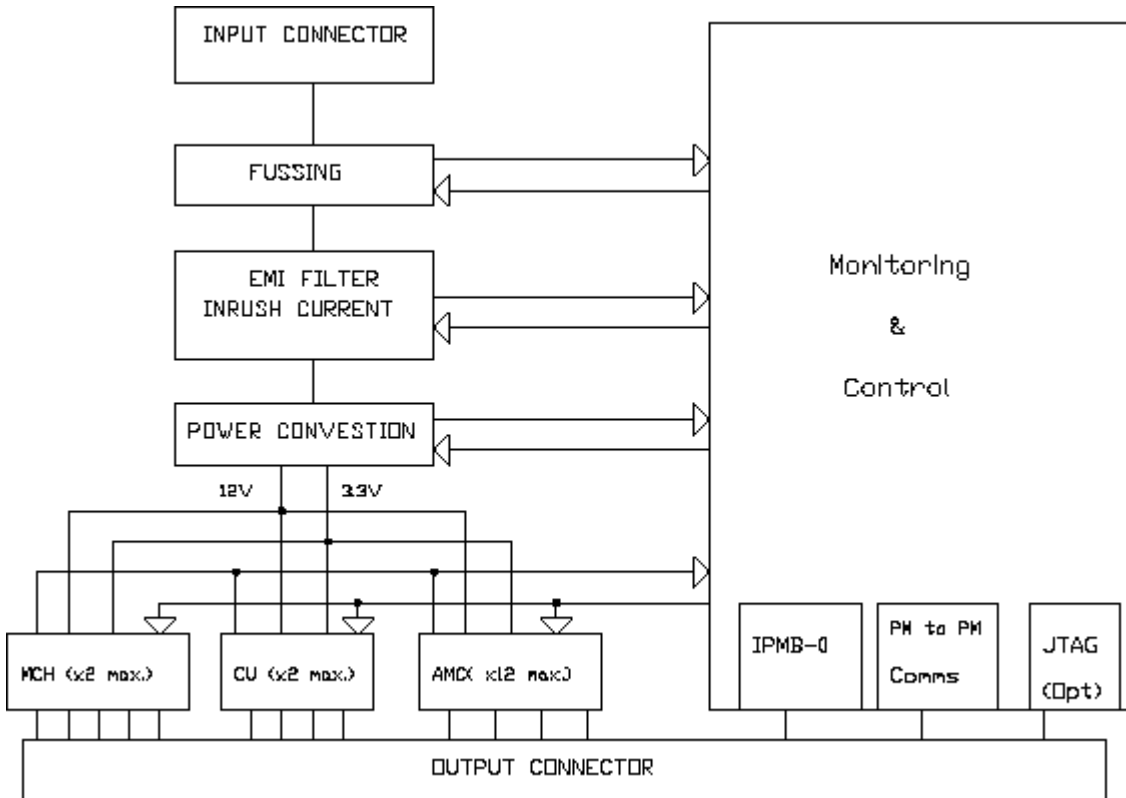

| | | | | | | | |
|----------|-------|--------------|------------|-------------|-------|-----|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 2 | OF 8 |

Input:

| | |
|-------------------|---|
| Input Voltage: | 90 - 264Vac |
| Frequency: | 47- 63Hz |
| Inrush Current: | ≤35A |
| Efficiency: | 84% typical at 115Vac, full load 88% typical at 230Vac, full load |
| Power Factor: | 0.99 typical |
| Input Current | 5.5A Typical at 1000W out and 230Vac 11A Typical at 1000W out and 110Vac |
| Input Protection: | Internal Line Fuse: Replaceable 12A 250Vac Normal- Blow |
| Brown – Out: | 75 to 300Vac ,(power supply will not damaged at this input voltage range) |
| Input Connector: | IEC-320 |
| Hold-up Time: | 10mSec minimum at 1200W |

Output Voltages & Currents:

| Output | Output Voltage | Min. Load | Total Max. Load | Max. per Channel |
|-------------|----------------|-----------|-----------------|------------------|
| V1 @ 220Vac | 16 x 12Vdc | 0 | 1200W / 98A | 80W / 7.6A Max. |
| V1@ 100Vac | 16 x 12Vdc | 0 | 1000W / 81.6A | 80W / 7.6A Max. |
| V2 | 16 x 3.3Vdc | 0 | 12.5W / 3.8 A | 200mA |

12V Output PP (Payload Power)

| | |
|-----------------------------|---|
| General | 12V will not be applied without 3.3V applied to load , Removal of 3.3V also removes 12V and de-assert ENABLE signal. |
| Set Point: | Configure as Primary PM 12.6± 0.05 Configure as Redundant 11.8± 0.05 |
| Total Regulation Range: | Configure as Primary PM 12.25 to 12.95Vdc Configure as Redundant 11.6 to 12.00Vdc |
| Rated Load: | 588W max. per module and 80W/7.6A per load channel. |
| Ripple & Noise: | 100mV Max. V p-p 20Mhz BW measured on 0.1u ceramic and 10uF tantalum connected across the output connector. |
| Overshoot: | Less than 1% of the nominal output voltage at turn ON and OFF |
| Transient Load Response: | ±3% Max. Deviation 2mSec recovery time for load change of 25% to 75% at slew rate of 1A/uSec . |
| Rise Time (per channel): | 10mSec Max With 1600uF on output under test |
| Turn On Delay(per channel): | 2 sec. Maximum(time from AC line turn ON, to output voltage presence) |
| Short Circuit Protection: | 9.7A Max. within 10mSec auto recovery , over 10mSec latch shut down. |
| Over-voltage Protection: | Outputs shut down when output rise to14.5V+/-0.5V (Latched Shut-Down) |
| Channel Fault Operation: | Output Shut Down, 3.3V on the same channel and other channels are not effected. After remove of the fault the output channel is available again under control of the Carrier Manager. PM_OK # is not de-asserted and redundant failover is not initiated. |
| Primary Voltage Droop | 1V maximum transition from primary to redundant power module |

| | | | | | | | |
|----------|-------|--------------|------------|-------------|-------|-----|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 3 | OF 8 |

3.3V Output MP(Management Power)

| | |
|---------------------------|--|
| General | 3.3V must be applied before 12V, Removal of 3.3V also removes 12V and de-assert Enable# signal. |
| Set Point: | 3.3V \pm 0.02Vdc |
| Total Regulation Range: | 3.13 to 3.63Vdc |
| Rated Load: | 8W max. per module , 0.5W / 150mA max. per channel. |
| Ripple & Noise: | 50mV Max. V p-p 20Mhz BW measured on 0.1u ceramic and 10uF tantalum connected across the output connector. |
| Overshoot: | Less than 1% of the nominal output voltage at turn ON and OFF |
| Transient Load Response: | \pm 3% Max. Deviation 2mSec recovery time for load change of 25% to 75% at slew rate of 1A/uSec . |
| Rise Time (per channel): | 25mSec Max With 150uF on output under test |
| Short Circuit Protection: | 225mA Max. within 12mSec auto recovery, over 10uSec latch shut down. |
| Over-voltage Protection: | Outputs shut down when output rise to 14.5V \pm 0.5V (Latched Shut-Down) |
| Channel Fault Operation: | Both output 3.3V and 12V Shut Down and Enable # is de-asserted. Other channels are not effected .After remove of the fault the output channel is available again under control of the Carrier Manager. PM_OK # is not de-asserted and redundant failover is not initiated. |
| Primary Voltage Droop | 0.15V maximum transition from primary to redundant power module |

Power Module (PM) Features:

| | |
|------------------------|---|
| Early Power: | The PM support Early Power Requirement per MicroTCA.0 Rev1.0 Section 4.4.11.1 Critical systems elements (MCH,CU) can be powered up without involvement of the Carrier Manager. |
| Normal Power: | The PM support Normal Power Requirement per MicroTCA.0 Rev1.0 Section .4.11.2 The Carrier Manager assume control of application of MP,PWR, and Enable # |
| Autonomous Operation: | The PM support Autonomous Power Requirement per MicroTCA.0 REV1.0 Section 4.4.11.3 Powering the Carrier element when Carrier Manager is not found within specified time. |
| Diagnostic Mode: | The PM shall support up to three Geographic Address Lines (GA0,GA1,GA2) |
| Hot Swap Operation: | The PM support Hot Swap Operation, Removal or Addition of a PM will not cause a fault or out-of – regulation condition |
| Fault Isolation | The PM isolated from other PMs in such a way that fault in one PM will not cause the shutdown of another PM |
| Thermal Protection: | The PM is activated when the ambient temperature or the power supply internal temperature exceeds a safe temperature. The MP output shut down After remove of the fault the output channel is available again under control of the Carrier Manager. |
| Led Status Indication: | DC OK Green Led ,DC Fail Red Led |
| Redundant Module | The PM support Redundant Power Requirement per MicroTCA.0 Rev1.0 Section .4.11.2 When configured as a redundant PM, the PM is capable of accepting the load of a failed PM within specified voltage magnitude and timing parameters. |
| RS232 Diagnostic Port | The PM provides status and sequencing data of the PM includes The current & voltage of each module |

| | | | | | | | |
|----------|-------|--------------|------------|-------------|-------|-----|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 4 | OF 8 |

Input Signals:

| | |
|---|--|
| Geographic Address : GA0,GA1,GA2 (300uA with GAx at 0.0V) | 11K Pull ups to 3.3V, low = 0.5Vmax. high = 1.63V min. |
| PS1_(SLOT)# : | |
| PS1_M1,PS1_M2,PS1_CU1,PS1_CU2,PS1...PS_12 (330uA with PS1_(SLOT)# at 0.0V) | 10K Pull ups to 3.3V, low = 1.1Vmax. high = 2.6V min. |
| PWRON_(MCH): PWRON_M1,PWRON_M2 (Per Utca .0 R1.0 | 10K Pull Down, low = 0.5Vmax. high = 1.63V min. |
| Power section 4.4.6) RST_PM_IN#: | low = 0.6Vmax., high = 2.4V min. |
| PMP_(X)#: PMP_A#,PMP_B#,PMP_C# (330uA with PMP_(X)# at 0.0V) | 10K Pull ups to 3.3V, low = 0.5Vmax. high = 1.63V min. |
| PS_PM: | 10K Pull ups to 3.3V, low = 0.6Vmax. high = 2.4V min. |

Output Signals:

| | |
|--|--|
| EN1_(SLOT)# : | Open Collector Output, I sink 10mA Max. |
| EN1_M1,EN1_M2,EN1_CU1,EN1_CU2,EN1...EN_12 | Low = 0.8Vmax. High = 5.5V Max. |
| PM_OK# : | Open Collector Output, I sink 10mA Max. |
| | Low = 0.8Vmax. High = 5.5V Max |
| RST_PM_(X)#: RST_PM_A#,RST_PM_B#,RST_PM_C# | Open Collector Output, I sink 10mA Max. |
| | Low = 0.8Vmax. High = 5.5V Max. |
| SMP: Complaint to Utca.0 R1.0 Section 4.6.5.4.3 Requirement 4.221-4.225 | Voltage Range 4.5V min. 6V max. I sink=750mA I source 350mA |

| | | | | | | | |
|----------|-------|--------------|------------|-------------|-------|-----|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 5 | OF 8 |

Environmental Specification:

Operating Temperature: Operation: -5°C to +55°C full load with 300LFM Forced Air Cooling
 Storage Temperature: -40°C to +85°C
 Humidity: Up to 95% RH non-condensing.
 Shock: Peak acceleration 1GPK max.
 Vibration: Random vibration, 10Hz to 500Hz, 3 axis 1.9GRMS max.
 Altitude: Operation 6K feet Non operation 40K feet.
 MTBF: 400,000 hours per Bellcore standard B332 GB 30°C

Safety Regulatory & EMC Specifications:

Meets FCC PART 15 CLASS A, CISPR 22 CLASS B, EN55022 CLASS B .

EN61000-3-2 Harmonics
 EN61000-3-3 Voltage fluctuations
 EN61000-4-2 ESD ±15KV discharge by AIR, ±12KV contact discharge, no damage.
 ESD ±10KV discharge by AIR, ±6KV contact discharge, no mis-operation.
 EN61000-4-3 Radiated Immunity: 80-1000Mhz 3V/m, AM 80% (1KHz), criteria A
 EN61000-4-4 Fast transient: 4KV on AC power port performance criteria B
 EN61000-4-5 Surge: 1KV line to line and 2KV line to Ground
 EN61000-4-6 3VRMS, 80% A.M. BY 1kHz
 EN61000-4-8 3A /m at 50Hz, performance criteria A.

Dielectric Withstand:

Input to Case: 1500VAC
 Input to Output: 3000VAC
 Output to Case: 500 VDC.

Safety Agency Compliance: CB IEC60950-1,TUV Rheinland GS to EN60950-1,TUV Rheinland c TUV us to UL60950-1 and CSA22.2.NO.60950-1,Cemark(LVD),NEBS GR-63and GR-1089

Leakage Current: 0.5mA max. @ 50/60 Hz, 264Vac input

MTBF: 300,000 hours minimum per BELCOR 332,issue 6 specification @50 degrees C.

| | | | | | | | |
|----------|-------|--------------|------------|-------------|-------|-----|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 6 | OF 8 |

Output Connector

Output connector:

EPT P/N 501-50096-183,
Tyco P/N 1469920-1
or equivalent

Mating Connector:

EPT P/N 502-50096-183
Tyco P/N 1469920-1
or equivalent


Pinout

| | | | |
|-----|--------|-------|-----|
| P1 | PP_M1 | PP_1 | P13 |
| P2 | PP_CU1 | PP_2 | P14 |
| P3 | PP_CU2 | PP_3 | P15 |
| P4 | GND | PP_4 | P16 |
| P5 | GND | PP_5 | P17 |
| P6 | GND | PP_6 | P18 |
| P7 | GND | PP_7 | P19 |
| P8 | GND | PP_8 | P20 |
| P9 | GND | PP_9 | P21 |
| P10 | GND | PP_10 | P22 |
| P11 | GND | PP_11 | P23 |
| P12 | PP_M2 | PP_12 | P24 |

| | | | | | | | | |
|---|--------|------------|---------|----------|--------|---------|-----------|-----------|
| 1 | PS_PM# | PM_OK# | PS1_M1# | PS1_CU1# | EN_M1# | EN_CU1# | MP_M1# | MP_CU1# |
| 2 | N/C | PMP_A# | PS1_2# | PS1_1# | EN_2# | EN_1# | MP_2# | MP_1# |
| 3 | N/C | PMP_B# | PS1_4# | PS1_3# | EN_4# | EN_3# | MP_4# | MP_3# |
| 4 | N/C | PMP_C# | PS1_6# | PS1_5# | EN_6# | EN_5# | MP_6# | MP_5# |
| 5 | N/C | RST_PM_IN# | PS1_8# | PS1_7# | EN_8# | EN_7# | MP_8# | MP_7# |
| 6 | N/C | RST_PM_A# | PS1_10# | PS1_9# | EN_10# | EN_9# | MP_10# | MP_9# |
| 7 | GA0 | RST_PM_B# | PS1_12# | PS1_11# | EN_12# | EN_11# | MP_12# | MP_11# |
| 8 | GA1 | RST_PM_C# | PS1_M2# | PS1_CU2# | EN_M2# | EN_CU2# | MP_M2# | MP_CU2# |
| 9 | GA2 | SMP | SCL_B | SDA_B | SCL_A | SDA_A | PWR_ON_M2 | PWR_ON_M1 |
| | A | B | C | D | E | F | G | H |

| | | | | | | |
|----------|-------|--------------|------------|-------------|---------|------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET 7 | OF 8 |

Outline Drawing

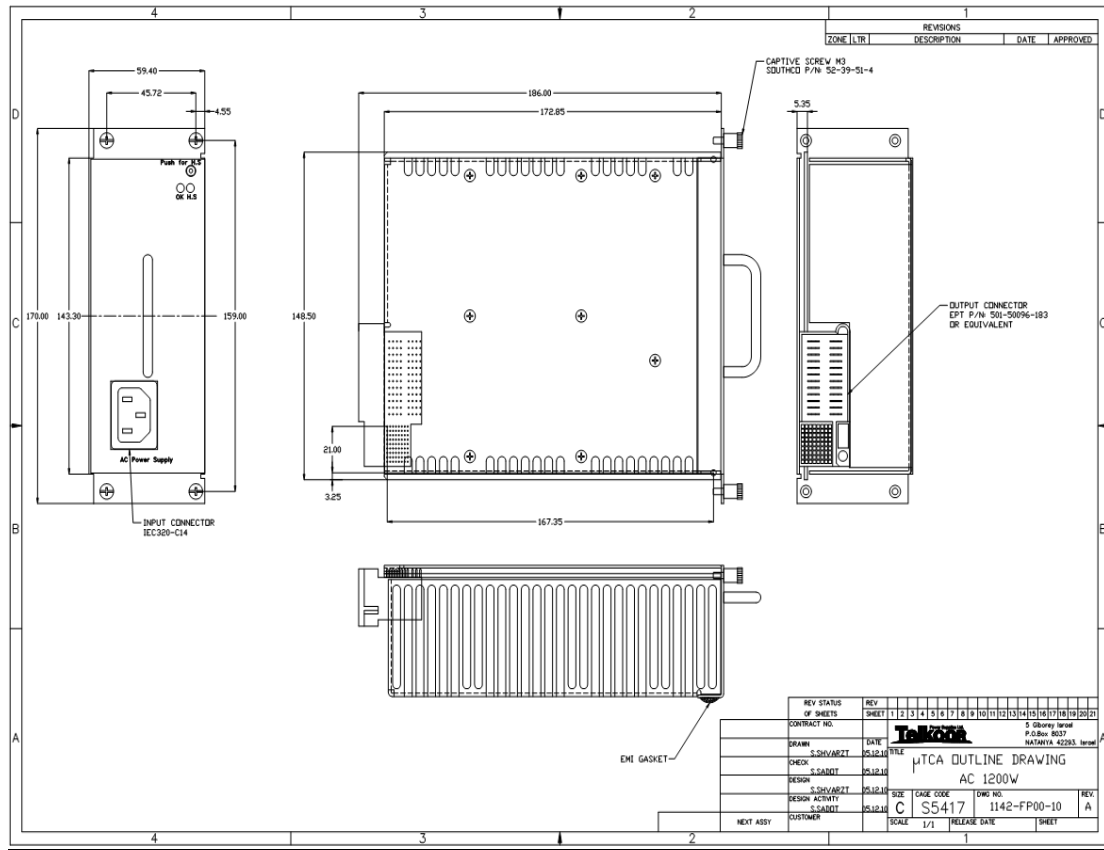

| | | | | | | |
|----------|-------|--------------|------------|-------------|-------|--------|
| CUSTOMER | SIZE | CAGE CODE | S5417 | DWG. NO. | REV | E |
| | SCALE | RELEASE DATE | 02/10/2011 | 1142-DOC-10 | SHEET | 8 OF 8 |