TI-BOX

- Ti-Box are light in weight approximately
 1/4 in weight of any metal boxes and
 can be easily install, drill and move.
 Ti-Box are corrosion resistant and of
 good superior insulation.
- 2. Ti-Box are weatherproof and dustproof under rigid quality standard of IP 66
- 3. Ti-Box are easily ideal for the installation of terminal rall, relay, control components, electrical and communications sensors etc.




外灌	見尺寸mm	1	ABS BO	X	AC	BOX
長	寬	高	ABS盒蓋	PC透明盒蓋	ABS盒蓋	PC透明盒蓋
190	190	130	DS-AG-1919	DS-AT-1919	DS-PG-1919	DS-PT-1919
280	190	130	DS-AG-2819	DS-AT-2819	DS-PG-2819	DS-PT-2819
280	190	180	DS-AG-2819-1	DS-AT-2819-1	DS-PG-2819-1	DS-PT-2819-1
380	190	130	DS-AG-3819	DS-AT-3819	DS-PG-3819	DS-PT-3819
380	190	180	DS-AG-3819-1	DS-AT-3819-1	DS-PG-3819-1	DS-PT-3819-1
280	280	130	DS-AG-2828	DS-AT-2828	DS-PG-2828	DS-PT-2828
340	280	130	DS-AG-3428	DS-AT-3428	DS-PG-3428	DS-PT-3428
380	280	130	DS-AG-3828	DS-AT-3828	DS-PG-3828	DS-PT-3828
380	280	180	DS-AG-3828-1	DS-AT-3828-1	DS-PG-3828-1	DS-PT-3828-1
560	280	130	DS-AG-5628	DS-AT-5628	DS-PG-5628	DS-PT-5628
560	380	180	DS-AG-5638	DS-AT-5638	DS-PG-5638	DS-PT-5638

底板尺寸: mm)

長		寬	高	鍍鋅鋼板型號
161		161	1.2	MP-1919
251.5	5	161	1.2	MP-2819
352.5	5	161	1.2	MP-3819
251		251	1.2	MP-2828
312		251	1.2	MP-2834
351		251	1.2	MP-2838
532		254.5	1.2	MP-5628
532		345.5	1.2	MP-5638







Division Model	H1	H2	НЗ	H4	W1	W2	W3	W4	D1	D2
DS-1919	190	174	165	120	190	174	165	120	98	30
DS-2819	280	266	255	210	190	170	165	120	98	30
DS-2819-1	280	266	255	210	190	170	165	120	98	80
DS-2828	280	260	255	210	280	260	255	210	98	30
DS-2834	341	320	316	270	280	260	256	210	100	30
DS-2838	380	359	355	310	280	259	254	210	98	30
DS-2838-1	380	359	355	310	280	259	255	210	98	80
DS-3819	382	366	355	310	192	172	165	120	98	30
DS-3819-1	382	366	355	310	192	172	165	120	98	80
DS-5628	560	540	535	490	280	260	255	220	98	30
DS-5638	560	540.	535	490	380	360	355	311	148	30

TI-BOX

IP66 ABS TI-BOX ENCLOSURES



Nice BOX



Out of the plastic boxes which are selling at present, it's ability and working efficiency are most excellent, the competitive power is much higher with the low price same as the level of steel box.

The products were added the electromagnetic interference (EMI) and preventing substance of the static electricity, and the strong point was given to the relevant mechanical protection of electricity, electron, and

The uses are possible according to the size as Small Terminal Box, Signal, Terminal and Pull, Control Box etc.

- 在熱銷中的塑盒產品中, NICE BOX的功能和作業性最爲優越, 價格却與Steel BOX相似, 從而提高了產品的競争力。
- 産品中包含防EMI輻射、防静電的物質,以力求保護内藏品、防護電氣和電子儀器。
- 適用于小型端子箱、信號機、終端機以及照明用PULL BOX,品種及大小齊全,便于使用。

室	内 用			
	SIZE		室	为 用
長	寬	高	A	BS
mm/inch	mm/inch	mm/inch	灰色蓋子	透明蓋子
100/3.94	150/ 5.91	70/2.76	NE-AG-1015	NE-AT-1015
100/3.94	200/7.87	70/2.76	NE-AG-1020	NE-AT-1020
170/6.69	220/8.66	110/4.33	NE-AG-1723	NE-AT-1723
290/11.42	190/7.48	100/3.94	NE-AG-2919-S	NE-AT-2919-S
290/ 11.42	190/ 7.48	140/5.51	NE-AG-2919	NE-AT-2919
190/ 7.48	290/ 11.42	100/3.94	NE-AG-1929-S	NE-AT-1929-S
190/ 7.48	290/ 11.42	140/5.51	NE-AG-1929	NE-AT-1929
250/ 9.84	350/ 13.78	150/5.91	NE-AG-2535	NE-AT-2535
300/ 11.81	300/ 11.81	130/5.12	NE-AG-3030-S	NE-AT-3030-S
300/ 11.81	300/ 11.81	180/7.09	NE-AG-3030	NE-AT-3030
290/ 1142	390/ 15.35	100/3.94	NE-AG-2939-S	NE-AT-2939-S
290/ 11.42	390/ 15.35	140/5.51	NE-AG-2939-M	NE-AT-2939-M
290/ 11.42	390/ 15.35	160/6.30	NE-AG-2939	NE-AT-2939
350/ 13.78	465/ 18.31	160/6.30	NE-AG-3546-S	NE-AT-3546-S
350/ 13.78	465/ 18.31	200/7.87	NE-AG-3546	NE-AT-3546

(室	外 用					
		SIZE			室 夕	ト 用	
	長	寬	高	А	C	Poly	/ester
	mm/inch	mm/inch	mm/inch	灰色蓋子	透明蓋子	灰色蓋子	透明蓋子
	100/3.94	150/ 5.91	70/2.76	NE-PG-1015	NE-PT-1015	NE-PCG-1015	NE-PCT-1015
	100/3.94	200/7.87	70/2.76	NE-PG-1020	NE-PT-1020	NE-PCG-1020	NE-PCT-1020
	170/6.69	220/8.66	110/4.33	NE-PG-1723	NE-PT-1723	NE-PCG-1723	NE-PCT-1723
	290/ 11.42	190/7.48	100/3.94	NE-PG-2919-S	NE-PT-2919-S	NE-PCG-2919-S	NE-PCT-2919-S
	290/ 11.42	190/ 7.48	140/5.51	NE-PG-2919	NE-PT-2919	NE-PCG-2919	NE-PCT-2919
	190/ 7.48	290/ 11.42	100/3.94	NE-PG-1929-S	NE-PT-1929-S	NE-PCG-1929-S	NE-PCT-1929-S
	190/ 7.48	290/ 11.42	140/5.51	NE-PG-1929	NE-PT-1929	NE-PCG-1929	NE-PCT-1929
	250/ 9.84	350/ 13.78	150/5.91	NE-PG-2535	NE-PT-2535	NE-PCG-2535	NE-PCT-2535
	300/ 11.81	300/ 11.81	130/5.12	NE-PG-3030-S	NE-PT-3030-S	NE-PCG-3030-S	NE-PCT-3030-S
	300/ 11.81	300/ 11.81	180/7.09	NE-PG-3030	NE-PT-3030	NE-PCG-3030	NE-PCT-3030
	290/ 11.42	390/ 15.35	100/3.94	NE-PG-2939-S	NE-PT-2939-S	NE-PCG-2939-S	NE-PCT-2939-S
	290/ 11.42	390/ 15.35	140/5.51	NE-PG-2939-M	NE-PT-2939-M	NE-PCG-2939-M	NE-PCT-2939-M
	290/ 11.42	390/ 15.35	160/6.30	NE-PG-2939	NE-PT-2939	NE-PCG-2939	NE-PCT-2939
	350/ 13.78	465/ 18.31	160/6.30	NE-PG-3546-S	NE-PT-3546-S	NE-PCG-3546-S	NE-PCT-3546-S
	350/ 13.78	465/ 18.31	200/7.87	NE-PG-3546	NE-PT-3546	NE-PCG-3546	NE-PCT-3546

— Fitted latches and hinges side ——

熱變形温度 -40° ~+80℃
A G ● 材質: ABS ● 顔色: 灰色
A T ● 材質:蓋(PC),主機(ABS)

P G • 材質:AC(耐火) • 顔色:灰色 **□** ● 顔色: 蓋(透明)

P T • 材質:蓋(PC),主機(POLYESTER) • 顔色:蓋(透明)

●熱變形温度 -40° ~+125℃ • 熱變形温度 -40° ~+130℃

• 材質:POLYESTER P C G 顔色:灰色 PCT • 材質:POLYESTER • 顔色:灰色

耐火等级94-5VA 添加UV剂

ABS: Acrylonitrile Butadiene Styrene PC:PolyCarbonate AC:ABS(30%)+PC(70%) Polyester:PBT+PC

TI-BOX的组装图

• 操作簡便,無腐蝕性,外形堅固而美觀。

• Plastic draw latch, hinge




Steel Mounting Panel

Plastic Mounting Panel

産 品	長 mm/inch	寬 mm/inch	高 mm/inch	MODEL
DS	116/ 4.57	68/ 2.68	1.6/ 0.06	DS-1015
DS-00-1020	116.5/ 6.52	68/ 2.68	1.6/0.06	DS-1020
DS	186/ 7.32	136/ 5.35	1.6/0.06	DS-1723
DS	251.5/ 9.90	161/ 6.34	1.6/ 0.06	DS-1929
DS-[][-2919(S)	251.5/ 9.90	161/ 6.34	1.6/0.06	DS-2919
DS-□□□-2535	320.9/ 12.63	220.9/ 8.70	1.6/ 0.06	DS-2535
DS-_\2939(-S,M)	362/ 14.25	265/ 10.43	1.6/0.06	DS-2939
DS	291/ 11.46	291/ 11.46	1.6/0.06	DS-3030
DS-\3546(-S)	447/ 17.60	333/ 13.11	1.6/0.06	DS-3546



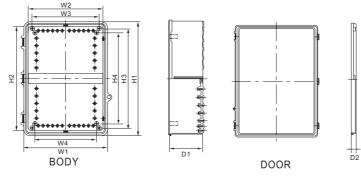

(允許誤差:±1mm)

Model		112	110
NE - 1015	149.4	136.4	112.5
NE - 1020	199.1	185.8	162.6
NE - 1723	222.7	200	182
NE - 1929-S	287	265	253
NE - 1929	287	266	253
NE - 2919-S	287	265	253
NE - 2919	287	266	253
NE - 3030-S	325	305	280
NF - 3030	330	308	280
NE - 2939-S	394	380	355
NE - 2939-M	394	380	355
NE - 2939	394	380	355
NE - 2535	369	349	330
NE - 3546-S	482	460	442
NE - 3546	487	466	442

Dimension


TI-BOX

- 1. Ti-Box are light in weight approximately 1/4 in weight of any metal boxes and can be easily install, drill and move. Ti-Box are corrosion resistant and of good superior insulation.
- 2. Ti-Box are weatherproof and dustproof under rigid quality standard of IP 66
- 3. Ti-Box are easily ideal for the installation of terminal rall, relay, control components, electrical and communications sensors etc.



外観尺寸mm ABS BOX AC BOX 長 寛 高 ABS盒蓋 PC透明盒蓋 AC盒蓋 PC透明盒蓋 65 50 55 DS-AG-0506 DS-AT-0506 DS-PG-0506 DS-PT-0506 DS-PT-0506 DS-PG-0506 DS-PT-0506 DS-PT-0506 DS-PG-0506 DS-PT-0506 110 80 45 DS-AG-0811-S DS-AT-0811-S DS-PG-0811-S DS-PT-0811 DS-PG-0811-S DS-PG-0811-S DS-PG-0811 DS-PT-0811 110 80 85 DS-AG-0811 DS-AT-0811 DS-PG-0811 DS-PT-0811 DS-PG-0811-DS-PG-0811-DS-PT-0811 DS-PT-0811 130 80 70 DS-AG-0813 DS-AT-0813 DS-PG-0813 DS-PT-0813 DS-PG-0813-DS-PT-0813 DS-PG-0813-DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816 DS-PT-0816 DS-PT-0816 DS-PG-0816 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818-DS-PT-0818 DS-PG-0818-DS-PT-0818 DS-PG-0818-DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 DS-PG-0825 DS-PT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AG-0825-1 DS-PG-0825-1 DS-PT-121-SDS-PG-121-SDS-PT-121-SDS-PT-121-SDS-PG-121-SDS-PT-	
65 50 55 DS-AG-0506 DS-AT-0506 DS-PG-0506 DS-PT-0506 110 80 45 DS-AG-0811-S DS-AT-0811-S DS-PG-0811-S DS-PT-0811 110 80 70 DS-AG-0811 DS-AT-0811 DS-PG-0811 DS-PT-0811 110 80 85 DS-AG-0811-1 DS-AT-0811-1 DS-PG-0811-1 DS-PT-0811 130 80 70 DS-AG-0813 DS-AT-0813 DS-PG-0813 DS-PT-0813 130 80 85 DS-AG-0813-1 DS-AT-0813-1 DS-PG-0813-1 DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816-1 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 70 DS-AG-0825-1	
110 80 45 DS-AG-0811-S DS-AT-0811-S DS-PG-0811-S DS-PG-0811-S DS-PT-0811 110 80 70 DS-AG-0811 DS-AT-0811 DS-PG-0811 DS-PT-0811 110 80 85 DS-AG-0811-1 DS-AT-0811-1 DS-PG-0811-1 DS-PT-0811 130 80 70 DS-AG-0813 DS-AT-0813 DS-PG-0813-1 DS-PT-0813 130 80 85 DS-AG-0813-1 DS-AT-0813-1 DS-PG-0813-1 DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816-1 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825-1 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 250 80	ž.
110 80 70 DS-AG-0811 DS-AT-0811 DS-PG-0811 DS-PT-0811 110 80 85 DS-AG-0811-1 DS-AT-0811-1 DS-PG-0811-1 DS-PT-0811 130 80 70 DS-AG-0813 DS-AT-0813 DS-PG-0813-1 DS-PT-0813 130 80 85 DS-AG-0813-1 DS-AT-0813-1 DS-PG-0813-1 DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816-1 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 70 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-1	
110 80 85 DS-AG-0811-1 DS-AT-0811-1 DS-PG-0811-1 DS-PT-0811 130 80 70 DS-AG-0813 DS-AT-0813 DS-PG-0813 DS-PT-0813 130 80 85 DS-AG-0813-1 DS-AT-0813-1 DS-PG-0813-1 DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	-S
130 80 70 DS-AG-0813 DS-AT-0813 DS-PG-0813 DS-PT-0813 130 80 85 DS-AG-0813-1 DS-AT-0813-1 DS-PG-0813-1 DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	
130 80 85 DS-AG-0813-1 DS-AT-0813-1 DS-PG-0813-1 DS-PT-0813 160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	- 1
160 80 55 DS-AG-0816 DS-AT-0816 DS-PG-0816 DS-PT-0816 180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	
180 80 70 DS-AG-0818 DS-AT-0818 DS-PG-0818 DS-PT-0818 180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	-1
180 80 85 DS-AG-0818-1 DS-AT-0818-1 DS-PG-0818-1 DS-PT-0818 250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0818 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	
250 80 70 DS-AG-0825 DS-AT-0825 DS-PG-0825 DS-PT-0825 250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	
250 80 85 DS-AG-0825-1 DS-AT-0825-1 DS-PG-0825-1 DS-PT-0825 125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	- 1
125 125 75 DS-AG-121-S DS-AT-121-S DS-PG-121-S DS-PT-121-	
201101210 201111210 201101210 20111121	- 1
125 125 100 DS-AG-1212 DS-AT-1212 DS-PG-1212 DS-PT-1212	3
175 125 75 DS-AG-1217 DS-AT-1217 DS-PG-1217 DS-PT-1217	
175 125 100 DS-AG-1217-1 DS-AT-1217-1 DS-PG-1217-1 DS-PT-1217	- 1
170 140 95 DS-AG-1417 DS-AT-1417 DS-PG-1417 DS-PT-1417	
200 150 100 DS-AG-1520 DS-AT-1520 DS-PG-1520 DS-PT-1520	
200 150 130 DS-AG-1520-1 DS-AT-1520-1 DS-PG-1520-1 DS-PT-1520	- 1
250 150 100 DS-AG-1525 DS-AT-1525 DS-PG-1525 DS-PT-1525	
250 150 130 DS-AG-1525-1 DS-AT-1525-1 DS-PG-1525-1 DS-PT-1525	- 1
200 200 95 DS-AG-2020-S DS-AT-2020-S DS-PG-2020-S DS-PT-2020	-S
200 200 130 DS-AG-2020 DS-AT-2020 DS-PG-2020 DS-PT-2020	
100 100 60 DS-AG-AS15	
110 150 70 DS-AG-AS25	
140 190 70 DS-AG-AS35	
190 240 90 DS-AG-AS45	
220 300 120 DS-AG-AS55	

Dimension (Allowable error: ±1mm)



Model Division	Н1	H2	НЗ	H4	W1	W2	W3	D1	D2
DS-0506	65	59	52	40	50	44	37	35	20
DS-0811-S	110	104	92	80	80	74	62	25	20
DS-0811	110	104	92	80	80	74	62	50	20
DS-0811-1	110	104	92	80	80	74	62	50	35
DS-0813	130	124	112	100	80	74	62	50	20
DS-0813-1	130	124	112	100	80	74	62	50	35
DS-0816	162	156	148	140	82	76	68	40	15
DS-0818	180	174	162	150	80	74	62	50	20
DS-0818-1	180	174	162	150	80	74	62	50	35
DS-0825	250	244	232	220	80	74	62	50	20
DS-0825-1	250	244	232	220	80	74	62	50	35
DS-1212-S	125	117	105	70	125	117	105	55	20
DS-1212	125	117	105	70	125	117	105	80	20
DS-1217	175	167	157	140	127	121	109	49	25
DS-1217-1	175	167	157	140	127	121	109	49	50
DS-1417	170	162	152	130	140	132	122	75	20
DS-1520	200	190	182	160	150	139	132	80	20
DS-1520-1	200	190	182	160	150	139	132	80	50
DS-1525	250	240	232	210	150	140	132	80	20
DS-1525-1	250	240	232	210	150	140	132	80	50
DS-2020-S	200	193	182	120	200	193	182	75	20
DS-2020	200	193	182	120	200	193	182	110	20
DS-AS15	110	95	88	92	105	95	88	20	
DS-AS25	160	148	137	128	118	105	97	25	
DS-AS35	200	187	177	167	150	137	127	25	
DS-AS45	248	236	227	216	197	185	177	25	
DS AS55	310	295	286	275	230	216	203	50	

COVER