

C 型液体搅拌机特性结构

特性:


- . 机体铝合金重力铸造, 经 T4、T6 热处理结构超强、不生锈
- . SUS304 不锈钢夹头, 精密脱蜡制造, 无断裂之处虑
- . 全密闭齿轮箱, 提高性能, 无需换油, 免保养。
- . 双层轴封保护, 无漏油之虑, 适用于食品制药、化工、环保等行业。
- . 铝合金材质, 外型美观, 结构轻巧, 操作移动简便。



Features:


- . Body: Made by aluminum alloy casting and through the process of T4, T6 heat treatment, the structure is very excellent.
- . Clamp: It is made from SUS304 stainless steel, and produced through precise dewaxing
- . Gear box: All tightly closed, high efficiency oil is used, so it is exempt from changing oil and maintenance.
- . Stainless steel clamp and aluminum alloy body can be painted with epoxy resin, that could resist corrosion and rust
- . Double oil seals could protect from fluid leaking, this machine is applicable to some fields such as foods, pharmaceutical, Chemical, environmental protection, etc
- . For aluminum alloy is used as material, the machine has a pleasant appearance and light structure, it is easy to operate and move

变速机组 Match Variator 结构 Structure

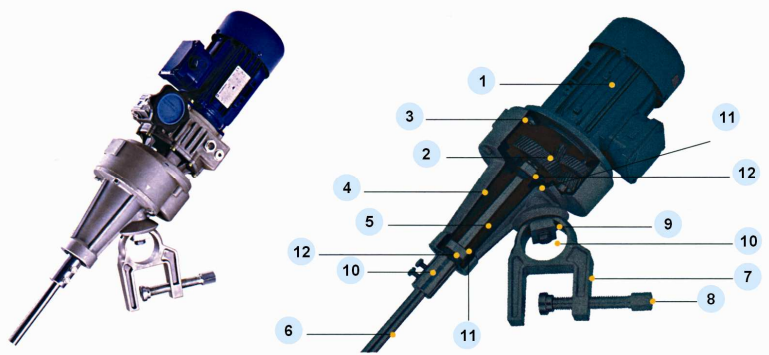

1. 马达 Motor
2. 齿轮 Gear
3. 齿轮箱 Gear Box(Aluminum Alloy)
4. 机架 Base Frame(Aluminum Alloy)
5. 转动轴 Spindle(SS41)
6. 搅拌轴 Shaft(SUS304)
7. 夹头 C-Clamp(SUS304)
8. 固定螺栓 Clamp Screw
9. 垫片 Washer
10. 螺丝 Cap Screw
11. 轴承 Bearing
12. 轴封 Oil Seal

C-018 小型搅拌机 C-018 Small Type Mixer

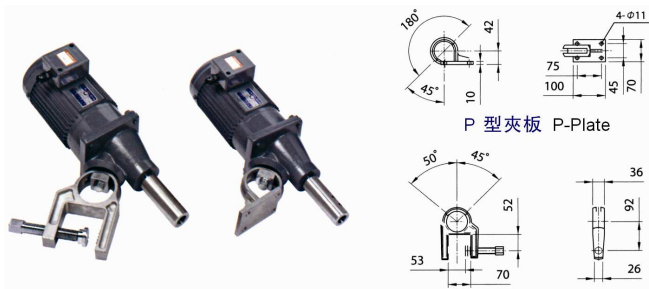

C-018 尺寸表 C-18 Dimension Table

型号	使用马达	转速 rpm		Dimension:mm	
Type	Motor	60Hz	50Hz	A	D
C-018S	1/8HP-4P	350.174	290.145	225	230
		116.90.60.45.32	96.75.50.38.30		260
C-018M	1/4HP-4P	350.175	290.145	255	230
		116.90.70	96.75.60		260

