

30 Watts

Total Power: 30W
 Input Voltages: 1.8V - 13V
 No. of Outputs: Single

APC08 (8 Amp)



Special Features

- Point of load (POL) applications
- High efficiency, 3.3V@93%
- -40°C to +85°C Ambient operating temperature
- Open Frame SMT
- Positive enable function
- Low output ripple and noise
- Regulation to zero load
- Adjustable Output through external resistor programming
- Fixed frequency switching (400 kHz)

Environmental

Operating temperature

-40°C to +85°C

Storage temperature: -55°C to +125°C

Demonstrated MTBF: > 2.3 Million Hours

Safety

UL, cUL 60950 Recognized

TUV EN60950 Licensed

Electrical Specs

Input

Input range 1.8-6.0VDC and 5.0-13.0VDC
 Input Surge 08 Device: 14V
 03 Device: 7V
 Efficiency 93%@3.3V

Control

Enable TTL compatible
 (positive enable option)

Output

Regulation (Line, Load, Temp) <3%
 Ripple and noise 100mV (5V and 6V)
 75mV (2.5V and 3.3V)
 50mV (below 2.5V)
 Output voltage adjust range 08 Device: 0.9V to 6.2V
 03 Device: 0.9V to 3.6V
 Transient Response 5% max deviation with
 50% to 75% full load
 500 μS (max) recovery

Specifications subject to change without notice.

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426




Ordering Information

Input Voltage	Output Voltage	Efficiency Full Load	Model Number
1.8V-6.0V	0.9V @ 8A	76% (Typ)*	APC08J03
1.8V-6.0V	1.2V @ 8A	81% (Typ)	APC08K03
1.8V-6.0V	1.5V @ 8A	86% (Typ)	APC08M03
2.2V-6.0V	1.8V @ 8A	88% (Typ)	APC08Y03
3.0V-6.0V	2.5V @ 8A	91% (Typ)	APC08G03
4.0V-6.0V	3.3V @ 8A	93% (Typ)	APC08F03
5.0V-13.0V	0.9V @ 8A	75% (Typ)	APC08J08
5.0V-13.0V	1.2V @ 8A	81% (Typ)	APC08K08
5.0V-13.0V	1.5V @ 8A	84% (Typ)	APC08M08
5.0V-13.0V	1.8V @ 8A	86% (Typ)	APC08Y08
5.0V-13.0V	2.5V @ 8A	90% (Typ)	APC08G08
5.0V-13.0V	3.3V @ 8A	92% (Typ)	APC08F08
7.5V-13.0V	5.0V @ 5A	94% (Typ)	APC05A08 ^{New}
8.5V-13.0V	6.0V @ 4A	95% (Typ)	APC04S08 ^{New}

* Typical Efficiency is measured at full load, mid range input and at T_A=25 °C

- Options: suffix “-9” = Output Trim option
 suffix “-9MA” = Output Trim with Ishare and PGood options
 suffix “-J” = Jedec Style Tray Packaging (Default packaging is T&R with no “-J” suffix required)

Mechanical Dimensions

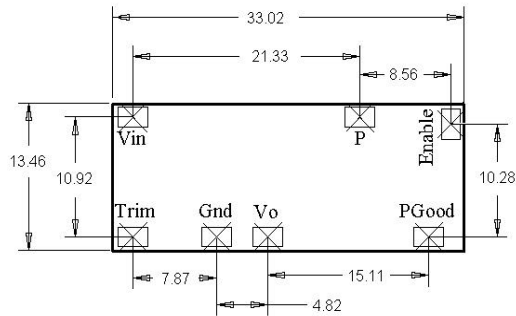

Pin Side Down [dimensions in mm]

- Optional Pins:
 PGood - Power Good Logic Signal
 P - Active Current Share Pin
 Trim - Trim Pin

Note:

1. Specifications given are typical values at nominal conditions.
2. The Technical Reference Notes should be consulted for detailed information.
3. Specifications subject to change without notice. Mechanical drawings are for reference only

Tolerances:

- x.xx +/- 0.02 in (x.x +/- 0.5mm)
 x.xxx +/- 0.010 in (x.xx +/- 0.25mm)

