





Model		2.5V	Units
Parameter			
Output Voltage Setpoint		2.47 – 2.52	Vdc
Line/Load Regulation	Max	0.1% / 0.2%	% Vo
Output total regulation		2.43 – 2.57	Vdc
Output adjust (note 4)		90-110	%Vo,no m
Remote-sense Comp.		10%	V
Output Ripple & Noise (note 2)	Max	100	mVp-p
Output Current		0-20	A
Efficiency (48V, Full load, 25C)	Typ	88%	%
External Capacitance		1,000-10,000	μF
Transient Response (typ) (note 3)	ΔVo	165	mV
25% step, 1A/μs	Ts	400	μs
Over-voltage trip point (latching)		3.0 – 3.5	V
Over-current trip point (non-latching)	Typ	25	A

All specifications, waveforms, charts at Ta=25C, Vin=48V, unless otherwise specified

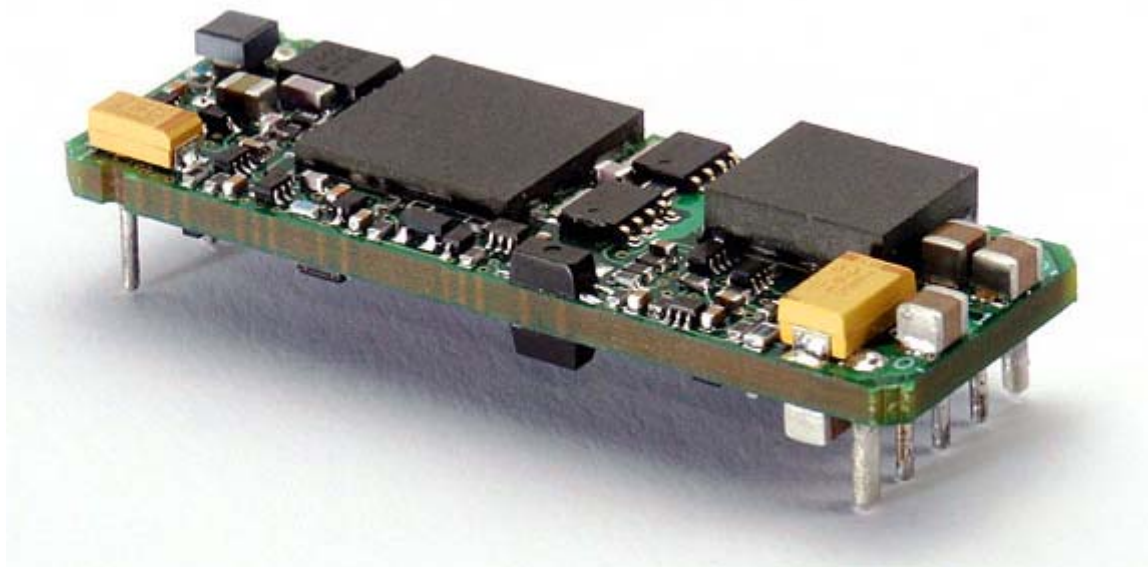

For full details go to
www.murata-ps.com/rohs


Parameter	Conditions		Min.	Typ.	Max.	Units
Input	Input Voltage (Vin)		36	48	75	Vdc
	Reflected Ripple Current	See note (1)		25		‘mA p-p
	Inrush Transient				0.2	A ² s
	Input Voltage Transient	100mS 10% duty cycle			100	V
	Undervoltage Lockout	Turn-on	32		35	Vdc
		(non-latching)Turn-off	31		34	Vdc
	Over-voltage lockout	(non-latching)Turn-off	77		81	Vdc
Isolation	Input-Output		1500			Vdc
	Resistance; input-output		10			Mohm
Temperature	Operating Ambient		-40		90	°C
	Storage		-40		125	°C
Protection	Over-Temperature	(non-latching)Measured on PCB		130		°C
Physical Information	Dimensions	2.30”L x 0.82” W x 0.37”H (58.4 x 20.8 x 9.3 mm)				
MTBF	Calculated at 40C ambient, (Bellcore)	1,000,000 Hrs	EHS15/20 Series			
	Demonstrated at 40C ambient with 90% confidence:	2,800,000 Hrs				
Safety	Complies with IEC/EN/CSA/UL 60950, provides basic insulation, input to output. c-UL-us (US and Canada) recognized, TUV certified (Bauart).					

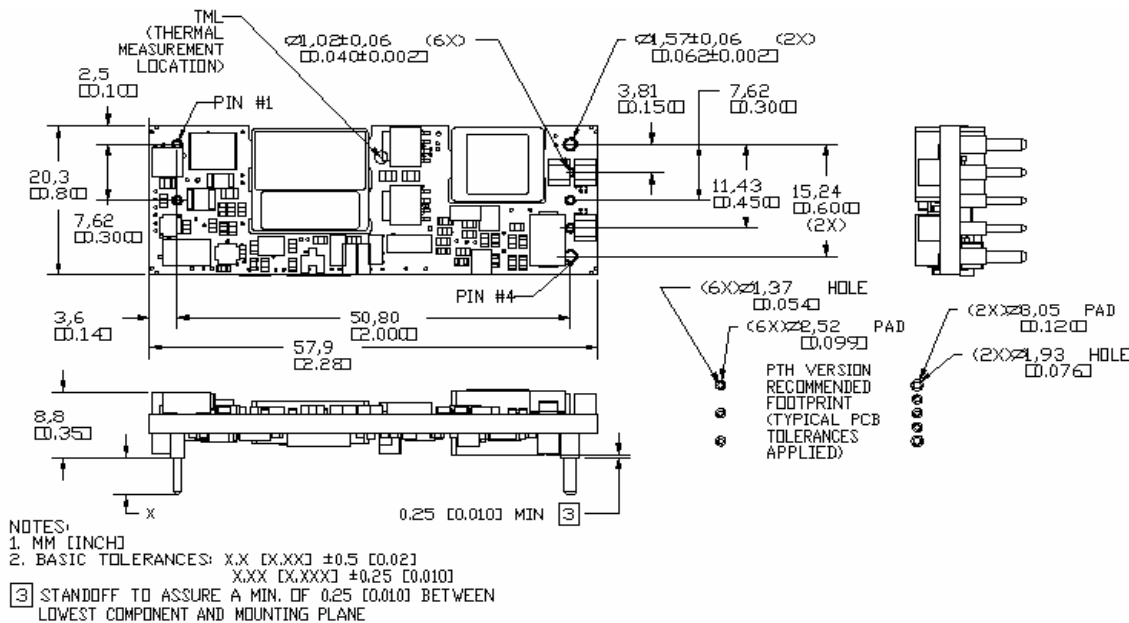


Pin Assignments

Pin #	Description	Pin #	Description	Pin #	Description
1	Vin (+)	4	Vout(-)	7	Sense +
2	Enable	5	Sense -	8	Vo (+)
3	Vin(-)	6	Vo adj		


EHS20-025 AIRFLOW DERATING
Air flow from Vo(+) to Vo(-) Tj=120C

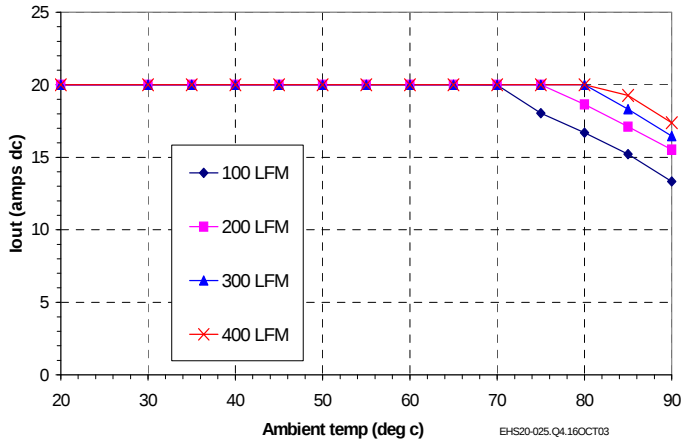


EHS20-025 AIRFLOW DERATING
Airflow from Vin to Vo Tj=120C

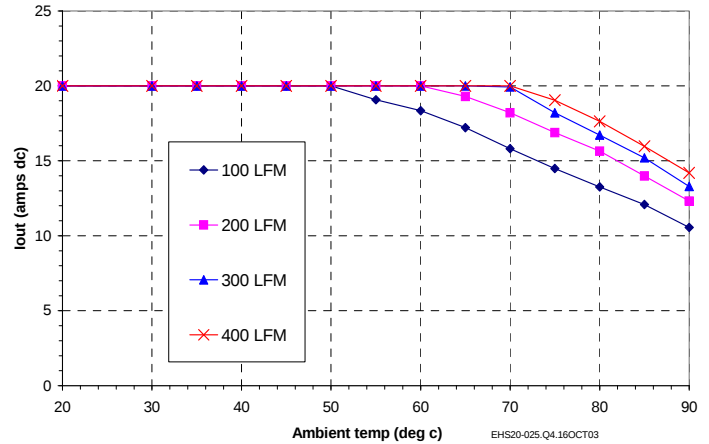

EHS20-025 Efficiency

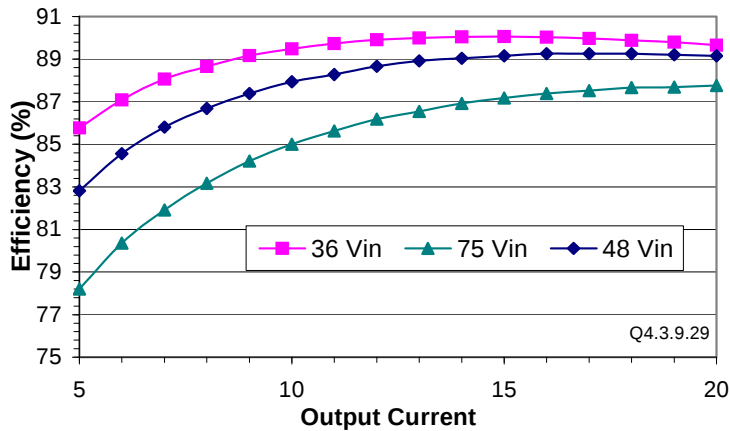


EHS20-025 Enable with Pre-Bias

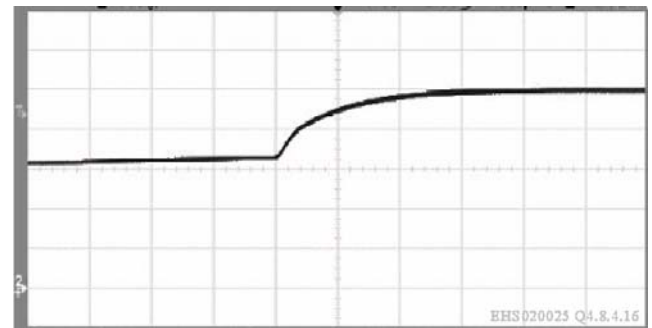

Output Voltage @ 0.5 V/div., 2 ms/div.
Load Current = 0. Load capacitance = 10,000 uF

EHS20-025 Trim-up and Trim-down Resistance

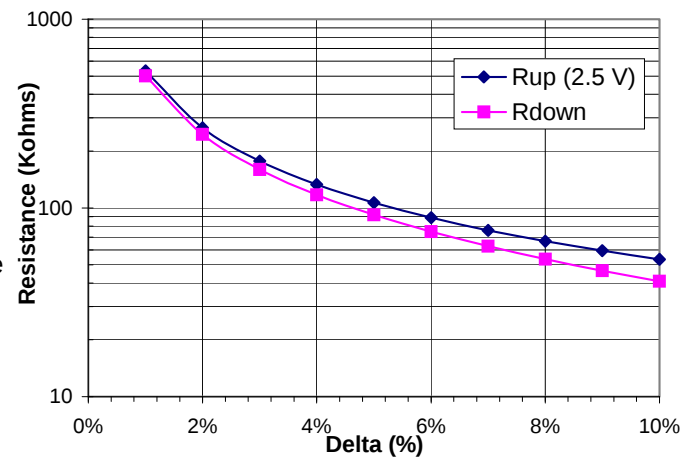


Trim Up/Down Formula : 2.5V model

$$R_{up} := \left[\frac{5.10 V_{nom} (100 + \%)}{1.225 \%} - \frac{510}{\%} - 10.2 \right] K$$

Where $\% := \frac{(V_{out} - V_{nom}) 100}{V_{nom}}$ and, V_{out} = Target output voltage


$R_{down}(\%) := \left(\frac{510}{\%} - 10.2 \right) K$ Where $\% := \frac{(V_{nom} - V_{out}) 100}{V_{nom}}$

EHS20-025 Startup Sequence from Vin

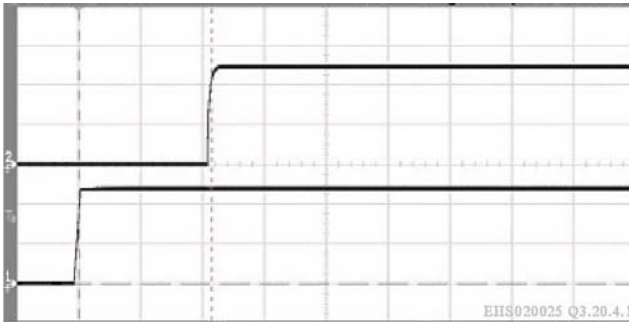


Top Trace: Vout @ 1.0 V/div.
Bot. Trace: Vin @ 20V/div. (48Vdc)
Horiz. @ 50 ms/div.

EHS20-025 Startup Sequence from Enable

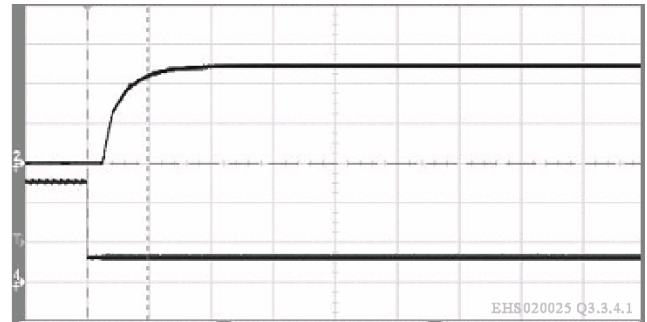

Top Trace: Vout @ 1.0 V/div.
Bot. Trace: Venable @ 2 V/div.
Horiz. @ 5 ms/div.


EHS20-025 Transient Response 50-75% step, 1A/μs

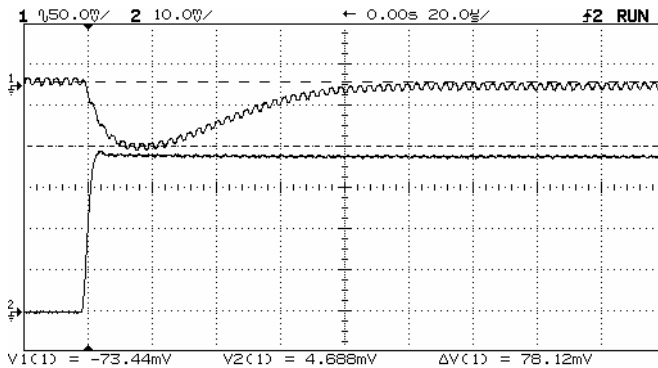

CH1: Vout AC coupled
CH2 : Step up Current


Load: 20 A, 0 uF, Turn-on delay: 110mS

EHS20-025 Transient Response 50- 25% step, 1A/μs

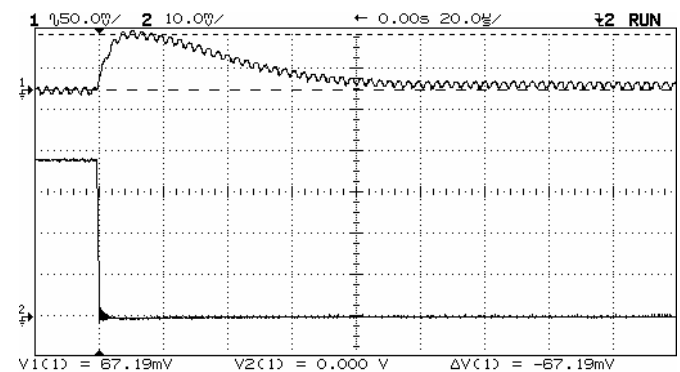


CH1: Vout AC coupled
CH2 : Step down Current

Load: 20 A. Vin: 48 V, 0 uF, Turn-on delay: 4.8 ms

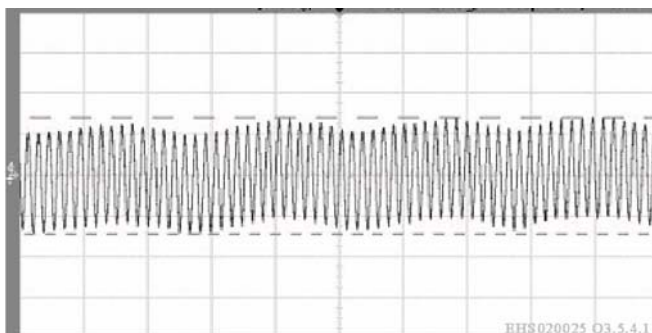

Input Current @ 5.0 mA/div., 20 us/div. (14 mApp)
Input Voltage: 48 V, Load Current: 20A
Note: refer to test circuit schematic


EHS20-025 Input Reflected Ripple

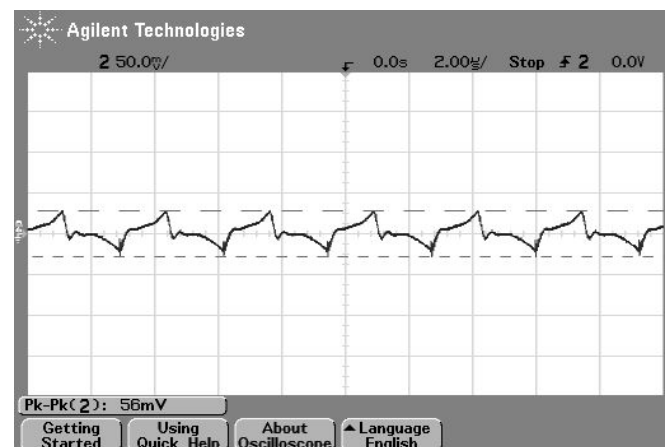

EHS20-025 Output Ripple Voltage, Io=20A

Notes:

1. Input Reflected Ripple is specified when measured with the filter shown below

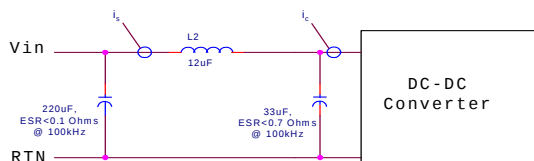

2. Output Ripple and noise is specified when measured with a 10uF tantalum and a 1uF ceramic capacitor at the converter output pins
3. Transient response is specified with a 470uF tantalum capacitor at the output of the converter
4. Trim resistor connection: Rtrim-up connected from Vo adj to Vo(+), Rtrim-down connected from Vo adj to Vo(-).

EHS20 Enable Pin Connection Table

	ENABLE POWER SUPPLY	DISABLE POWER SUPPLY
NEGATIVE LOGIC VERSION	OV < Venable < 0.8V (internal pull-up > 50Kohms @ 5V)	2.5V < Venable < 15V (external pull-up > 1Kohms)
POSITIVE LOGIC VERSION	2.5V < Venable < 15V (external pull-up > 1Kohms)	OV < Venable < 0.8V (internal pull-up > 50Kohms @ 5V)

Note: Power Supply has internal pull-up resistor. Enable pin is in a valid "high" state if left open-circuit.

Safety considerations


The EHS series of converters are certified to IEC/EN/CSA/UL 60950. If this product is built into information technology equipment, the installation must comply with the above standard.

An external input fuse (5A to 30A recommended), must be used to meet the above requirements.

The output of the converter [Vo(+)/Vo(-)] is considered to remain within SELV limits when the input to the converter meets SELV or TNV-2 requirements.

The converters and materials meet UL 94V-0 flammability ratings.

Part Number Designations

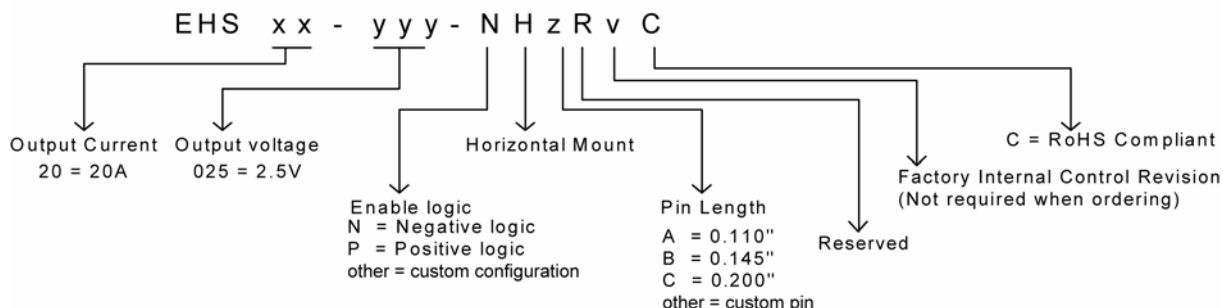

RoHS Compliant

The EHS series of converters is in compliance with the European Union Directive 2002/95/EC (RoHS) with respect to the following substances: lead (Pb), mercury (Hg), cadmium (Cd), hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).



Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356
www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2008 Murata Power Solutions, Inc.

USA: Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com

Canada: Toronto, Tel: (866) 740-1232, email: toronto@murata-ps.com

UK: Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com

France: Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com

Germany: München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com

Japan: Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com
Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
Website: www.murata-ps.jp

China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com
Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com