

DC/DC Power Modules 15–18W PKC 2000 I

- Regulated single, dual and triple outputs.
- Low profile 10.7 mm (0.42 in.), allows 0.8" board pitch – 0.6 in. if recessed in the printed board
- Proven MTBF >2,000,000 hours at +75 °C case temperature and a rugged mechanical construction
- Efficiency 85% typ, at full load. No extra heatsink up to +85°C ambient. Max. +115°C case
- Low EMI in conformance with class A in EN 55022 and FCC part 15J



The 15–18 watts PKC series DC/DC power modules are especially designed for decentralized 24 and 28 Vdc systems with distributed on-board DC/DC converters. Their low profile allows very narrow board pitches and slim designs. By using thickfilm technology, which provides a high degree of integration as well as efficient thermal management, and by utilizing a 300 kHz switching frequency based on proprietary drive & control circuits, these highly reliable products can be used in demanding applications within e.g. cellular radio, medical, industrial and aircraft industry. By using magnetic integration of the output voltages in the feedback loop, all outputs are kept within a $\pm 3\%$ total tolerance band.

Input to output isolation is 500 Vdc and mechanical ruggedness – specified in conformance with IEC 68-2 – is close to requirements for discrete components. Extreme temperature conditions can be met since the PKC power modules can operate with full output power in ambient temperatures from -45 to $+85$ °C, or up to $+115$ °C case temperature also making the products ideal for applications within not temperature controlled environments. The PKC series are manufactured in highly automated production lines using SMT, laser trimming, 100% burn-in and ATE final inspection. Since 1991, Ericsson Components AB is an ISO 9001 certified supplier.

Product Program

V_i	V_o/I_o max			P_o max	Ordering No.
	Output 1	Output 2	Output 3		
24 V	5 V/3 A			15 W	PKC 2111 PI
	12 V/1.5 A			18 W	PKC 2113 PI
	+12 V/1.2 A	-12 V/1.2 A		18 W	PKC 2121 PI
	+15 V/1 A	-15 V/1 A		18 W	PKC 2126 PI
	+5 V/3 A	+12 V/0.6 A	-12 V/0.6 A	15 W	PKC 2131 PI
	+5 V/3 A	+15 V/0.5 A	-15 V/0.5 A	15 W	PKC 2132 PI
	+5 V/3 A	+12 V/0.6 A	-5 V/1 A	15 W	PKC 2135 PI

General

Absolute Maximum Ratings

Characteristics		min	max	Unit
T_C	Case temperature ¹⁾	-45	+115	°C
T_S	Storage temperature	-55	+125	°C
V_I	Input voltage	-0.5	36	V dc
V_{ISO}	Input to output isolation	500		V dc
W_{tr}	Transient input energy ²⁾		0.6	Ws
V_{RC}	Remote control voltage pin 1	0	5	V dc

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Safety

The PKC 2000 DC/DC power modules are designed in accordance with UL 1950, CAN/CSA-C22.2 No. 234-M90 and EN 60 950. (*Safety of information technology equipment including electrical business equipment*).

The isolation voltage is an operational insulation in accordance with EN 60950 and the DC/DC power module shall be installed in an end-use equipment.

The isolation voltage between input and output and between case and input/output is 500 V dc and the capacitor between the input and output has a value of 10 nF. The leakage current is less than 1uA @ 26 V dc. The case is partly designed in non-conductive plastic. Flammability ratings meets UL 94V-0.

Input $T_C < T_{Cmax}$ unless otherwise specified

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range ³⁾		18	36		V
V_{Ioff}	Turn-off input voltage	(See Operating Information)	13		17	V
V_{Ion}	Turn-on input voltage	(See Operating Information)	14		18	V
r_{Irush}	Equivalent inrush current resistance			600		mΩ
C_I	Input capacitance			1.4		μF
P_{Ii}	Input idling power	$I_O = 0, T_C = 0...+95\text{ °C}$		2		W
P_{RC}	Input stand-by power	$V_I = 26V, I_O = 0, T_C = 0...+95\text{ °C}, RC$ connected to pin 3		0.6		W


Environmental Characteristics

Characteristics	Test procedure & conditions		
Vibration (Sinusoidal)	IEC 68-2-6 F _c	Frequency Amplitude Acceleration Number of cycles	10...500 Hz 0.75 mm 10 g 10 in each axis
Shock (Half sinus)	IEC 68-2-27 E _a	Peak acceleration Shock duration	200 g 3 ms
Bump (Half sinus)	IEC 68-2-29 E _b	Peak acceleration Bump duration Number of bumps	40 g 6 ms 1000 in 6 directions
Temperature change	IEC 68-2-14 N _a	Temperature Number of cycles	-40°C...+125°C 10
Damp heat	IEC 68-2-3 C _a	Temperature Duration	40°C 56 days
Accelerated damp heat	IEC 68-2-3 C _a with bias	Temperature Humidity Duration	85°C 85% RH 500 hours
Solder resistability	IEC 68-2-20 T _b 1A	Temperature, solder Duration	260°C 10...13 s

Notes:

- 1) Corresponding ambient temp. range (T_A) at full output power is -45 to +85 °C.
- 2) $P < 1$ kW, $t_r/t_d = 10/1000$ ms, $I_L < 8$ A. Transient suppressor threshold voltage is 39 V typ.
- 3) The converters will operate down to $V_I \leq 1$ V, when V_I decreases, but will turn on at $V_I \leq 18$ V, when V_I increases (see also Operating information).

Mechanical Data

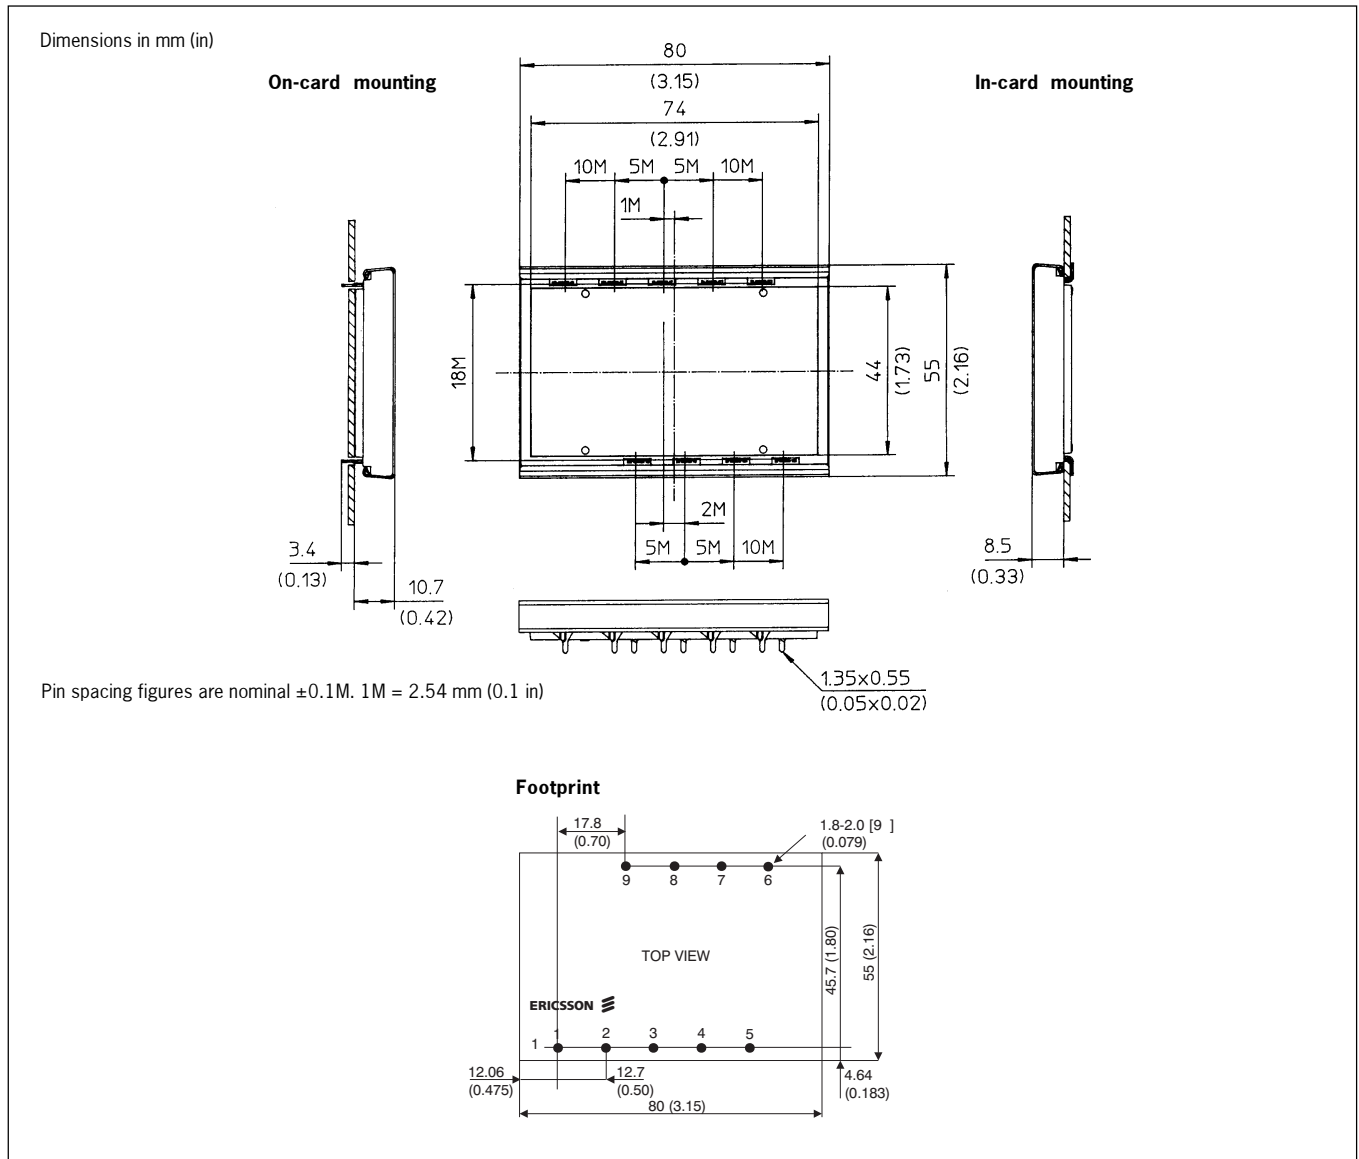

Connections

Pin	Designation	Function
1	RC	Remote Control to turn-on and turn-off the output. It is also used to adjust the turn-off input voltage threshold (see V_{Ioff} p. 15)
2	NC	The pin is Not Connected
3	-In	Negative Input terminal
4	+In	Positive Input terminal
5	Aux	Auxiliary terminal (see V_{Ioff} p. 15)
6	Out	Negative Output terminal. Output 2 in dual and Output 3 in triple output models
7	Out	Positive Output terminal. Output 2 in triple output models. Additional return in dual versions
8	Rtn	Return terminal for all outputs
9	Out	Positive Output terminal. Output 1 in all models

Weight

50 gr (1.76 oz).

Case

Blue anodized aluminum case with a plastic bottom cover.

Thermal Data

Two-parameter model

Power dissipation is generated in the components mounted on the ceramic substrate. The thermal properties of the PKC power module is determined by thermal conduction in the connected pins and thermal convection from the substrate via the case.

The two-parameter model characterize the thermal properties of the PKC power module and the equation below can be used for thermal design purposes if detailed information is needed. The values are given for a module mounted on a printed board assembly (PBA).



Note that the thermal resistance between the substrate and the air, $R_{th\ sub-A}$ is strongly dependent on the air velocity.

$$T_{sub} = P_d \times R_{th\ sub-P} \times R_{th\ sub-A} / (R_{th\ sub-P} + R_{th\ sub-A}) + (T_P - T_A) \times R_{th\ sub-A} / (R_{th\ sub-P} + R_{th\ sub-A}) + T_A$$

Where:

- P_d : dissipated power, calculated as $P_O \times (1/\eta - 1)$.
- T_{sub} : max average substrate temperature, $\approx T_{Cmax}$.
- T_A : ambient air temperature at the lower side of the power module.
- T_P : average pin temperature or solder joint temperature.
- $R_{th\ sub-P}$: thermal resistance from T_{sub} to the pins.
- $R_{th\ sub-A}$: thermal resistance from T_{sub} to T_A .
- v : velocity of ambient air.


Air velocity in free convection is 0.2–0.3 m/s (40-60 lfm).

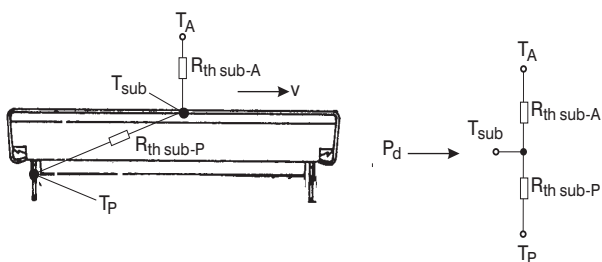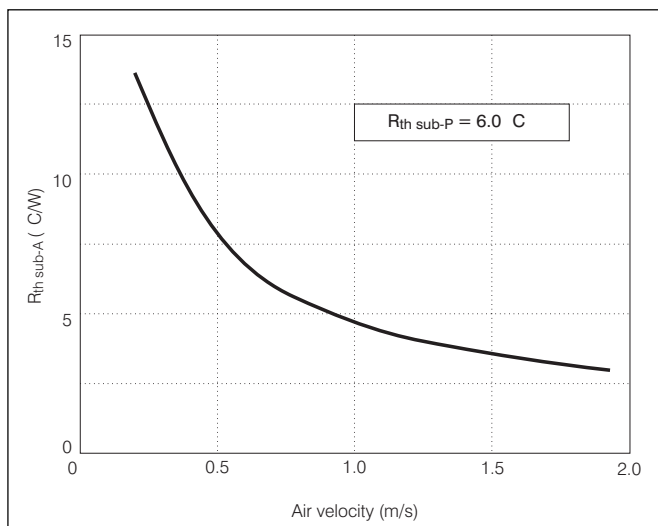


Electrical Data

Fundamental circuit diagrams


Single output

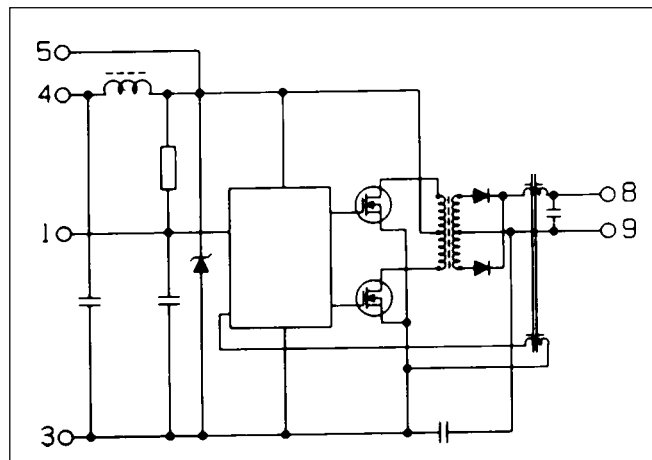

Dual output

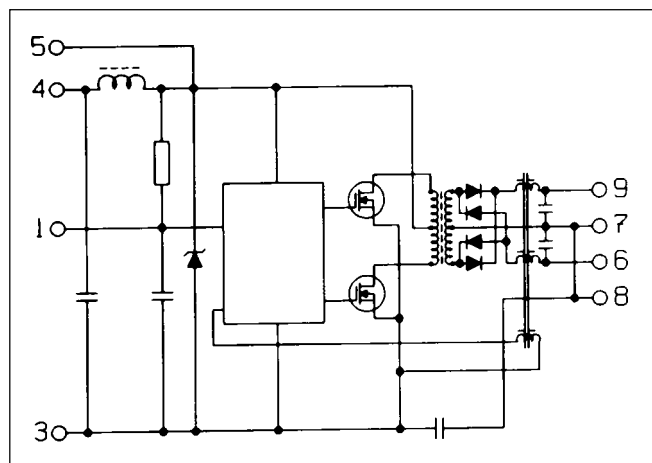

Triple output

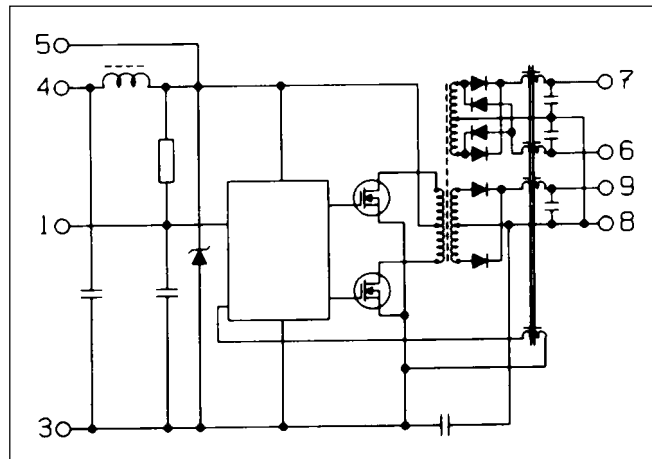

PKC 2111 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified.

Output

Characteristics		Conditions	Output 1			Unit
			min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = 3\text{ A}$, $V_I = 26\text{ V}$	5.02	5.06	5.11	V
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O_{\text{max}}}$ and long term drift	4.90		5.25	V
	Idling circuit voltage	$I_O = 0\text{ A}$			5.25	V
	Line regulation	$I_O = I_{O_{\text{max}}}$			90	mV
	Load regulation	$I_O = 0.1 \dots 1.0 \times I_{O_{\text{max}}}$, $V_I = 26\text{ V}$			150	mV
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O_{\text{max}}}$, $V_I = 26\text{ V}$ load step = 2.4 A		100		μs
V_{tr}	Load transient voltage	$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$		+250		mV
				-250		mV
	Short term drift	$t = 0 \dots 10\text{ minutes}$		-15		mV
T_{coeff}	Temperature coefficient	$I_O = I_{O_{\text{max}}}$, $T_C < T_{C_{\text{max}}}$		-0.5		$\text{mV}/^\circ\text{C}$
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O_{\text{max}}}$, $V_I = 26\text{ V}$	$0.1 \dots 0.9 \times V_O$	20		ms
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{O_i}$	30		ms
I_O	Output current		0		3.0	A
$P_{O_{\text{max}}}$	Max output power	*	15			W
I_{lim}	Current limiting threshold	$T_C < T_{C_{\text{max}}}$	3.1			A
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up		<0.5		A
$V_{O_{\text{ac}}}$	Output ripple & noise	$I_O = I_{O_{\text{max}}}$	20 Hz... 5 MHz		100	$\text{mV}_{\text{p-p}}$
			DC... 50 MHz		120	$\text{mV}_{\text{p-p}}$
			1 MHz bandwidth		35	mV_{rms}
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, $1\text{ V}_{\text{p-p}}$, $V_I = 26\text{ V}$ ($\text{SVR} = 20 \log(1\text{ V}_{\text{p-p}}/V_{O_{\text{p-p}}})$)	50			dB

* See also Power derating p. 12

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O_{\text{max}}}$, $V_I = 26\text{ V}$	80.5	81.5		%
P_d	Power dissipation	$I_O = I_{O_{\text{max}}}$		3.4		W

PKC 2113 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified.

Output

Characteristics		Conditions	Output 1			Unit	
			min	typ	max		
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = 1.5\text{ A}$, $V_I = 26\text{ V}$	11.94	12.00	12.06	V	
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$ and long term drift	11.80		12.35	V	
	Idling circuit voltage	$I_O = 0\text{ A}$			12.40	V	
	Line regulation	$I_O = I_{O\text{max}}$			168	mV	
	Load regulation	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 26\text{ V}$			360	mV	
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 26\text{ V}$ load step = 1.2 A		200		μs	
V_{tr}	Load transient voltage		$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$		+600		mV
					-600		mV
	Short term drift	$t = 0 \dots 10\text{ minutes}$		-45		mV	
T_{coeff}	Temperature coefficient	$I_O = I_{O\text{max}}$, $T_C < T_{C\text{max}}$		-1.5		$\text{mV}/^\circ\text{C}$	
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{max}}$, $V_I = 26\text{ V}$	$0.1 \dots 0.9 \times V_O$		20	ms	
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{O_i}$		30	ms	
I_O	Output current		0		1.5	A	
$P_{O\text{max}}$	Max output power	*	18			W	
I_{lim}	Current limiting threshold	$T_C < T_{C\text{max}}$	1.6			A	
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up		<0.5		A	
V_{Oac}	Output ripple & noise	$I_O = I_{O\text{max}}$	20 Hz... 5 MHz		80	mV_{p-p}	
			DC... 50 MHz		100	mV_{p-p}	
			1 MHz bandwidth		25	mV_{rms}	
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, 1 V_{p-p} , $V_I = 26\text{ V}$ ($\text{SVR} = 20 \log(1\text{ V}_{p-p}/V_{O\text{p-p}})$)	43			dB	

* See also Power derating p. 12

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{max}}$, $V_I = 26\text{ V}$	84	85		%
P_d	Power dissipation	$I_O = I_{O\text{max}}$		3.2		W

PKC 2121 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified. $I_{O1\text{nom}} = 0.75\text{ A}$, $I_{O2\text{nom}} = 0.75\text{ A}$

Output

Characteristics		Conditions	Output 1			Output 2			Unit
			min	typ	max	min	typ	max	
V_{O1}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = I_{O\text{nom}}$, $V_I = 26\text{ V}$	11.91	12.00	12.09	-11.84	-12.00	-12.16	V
V_O	Output voltage tolerance band	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $I_{O2} = I_{O\text{nom}}$ and long term drift	11.75		12.35	11.64		12.36	V
	Idling circuit voltage	$I_O = 0\text{ A}$			12.40	15 20		V	
	Line regulation	$I_O = I_{O\text{nom}}$			120	144		mV	
	Load regulation	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $I_{O2} = I_{O\text{nom}}$, $V_I = 26\text{ V}$			360			mV	
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $V_I = 26\text{ V}$ load step = 0.6 A symmetrical load, $I_{O1} = I_{O2}$	200		200				μs
V_{tr}	Load transient voltage	$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$	+600		+600				mV
			-600		-600				mV
	Short term drift	$t = 0 \dots 10\text{ minutes}$	-30		-30				mV
T_{coeff}	Temperature coefficient	$I_O = I_{O\text{nom}}$, $T_C < T_{C\text{max}}$	-1.0		-1.0				$\text{mV}/^\circ\text{C}$
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $V_I = 26\text{ V}$	0.1 ... 0.9 $\times V_O$		20		20		ms
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{O1}$		30		30		ms
I_O	Output current		0 1.2		0 1.2				A
$P_{O\text{max}}$	Max total output power	*	min 18					W	
I_{lim}	Current limiting threshold	$T_C < T_{C\text{max}}$	min $1.02 \times P_{O\text{max}}^{**}$						
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up	<0.5		<0.5				A
$V_{O\text{ac}}$	Output ripple & noise	$I_O = I_{O\text{nom}}$	20 Hz ... 5 MHz		90		90		$\text{mV}_{\text{p-p}}$
			DC ... 50 MHz		110		110		$\text{mV}_{\text{p-p}}$
			1 MHz bandwidth		25		30		mV_{rms}
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, $1\text{ V}_{\text{p-p}}$, $V_I = 26\text{ V}$ (SVR = $20 \log(1\text{ V}_{\text{p-p}}/V_{O\text{p-p}})$)	43		43				dB

* See also Power derating p. 12

** I_{lim} on each output is set by the total load

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{nom}}$, $V_I = 26\text{ V}$	84	86		%
P_d	Power dissipation	$I_O = I_{O\text{nom}}$	2.9			W

PKC 2126 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified. $I_{O1\text{ nom}} = 0.6\text{ A}$, $I_{O2\text{ nom}} = 0.6\text{ A}$

Output

Characteristics		Conditions	Output 1			Output 2			Unit	
			min	typ	max	min	typ	max		
V_{O1}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = I_{O\text{ nom}}$, $V_I = 26\text{ V}$		14.89	15.0	15.11	-14.82	-15.0	-15.18	V
V_O	Output voltage tolerance band	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $I_{O2} = I_{O\text{ nom}}$ and long term drift		14.70		15.40	14.55		15.45	V
	Idling voltage	$I_O = 0\text{ A}$				15.45	18	23		V
	Line regulation	$I_O = I_{O\text{ nom}}$				240	270			mV
	Load regulation	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $I_{O2} = I_{O\text{ nom}}$, $V_I = 26\text{ V}$				450				mV
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $V_I = 26\text{ V}$ load step = 0.48 A symmetrical load, $I_{O1} = I_{O2}$		250			250			μs
V_{tr}	Load transient voltage	$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$			+750		+750			mV
					-750		-750			mV
	Short term drift	$t = 0 \dots 10\text{ minutes}$		-30		-30			mV	
T_{coeff}	Temperature coefficient	$I_O = I_{O\text{ nom}}$, $T_C < T_{C\text{ max}}$		-1.0		-1.0			mV/ $^\circ\text{C}$	
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $V_I = 26\text{ V}$	$0.1 \dots 0.9 \times V_O$		20		20			ms
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{O1}$		30		30			ms
I_O	Output current			0	1.0		0	1.0		A
$P_{O\text{ max}}$	Max total output power	*		min 18					W	
I_{lim}	Current limiting threshold	$T_C < T_{C\text{ max}}$		min $1.02 \times P_{O\text{ max}}^{**}$						
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up		<0.5		<0.5			A	
$V_{O\text{ ac}}$	Output ripple & noise	$I_O = I_{O\text{ nom}}$	20 Hz ... 5 MHz		90		90			mV _{p-p}
			DC ... 50 MHz		110		110			mV _{p-p}
			1 MHz bandwidth		25		30			mV _{rms}
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, 1 V_{p-p} , $V_I = 26\text{ V}$ (SVR = $20 \log(1\text{ V}_{p-p}/V_{O\text{ p-p}})$)		40		40			dB	

* See also Power derating p. 12

** I_{lim} on each output is set by the total load

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{ nom}}$, $V_I = 26\text{ V}$	84	86.5		%
P_d	Power dissipation	$I_O = I_{O\text{ nom}}$	2.8			W

PKC 2131 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified. $I_{O1\text{ nom}} = 2.0\text{ A}$, $I_{O2, 3\text{ nom}} = 0.2\text{ A}$

Output

Characteristics		Conditions	Output 1			Output 2			Output 3			Unit				
			min	typ	max	min	typ	max	min	typ	max					
V_{Oi}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = I_{O\text{ nom}}$, $V_I = 26\text{ V}$		5.02	5.06	5.11	11.94	12.10	12.26	-11.94	-12.10	-12.26	V			
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $I_{O2, 3} = I_{O\text{ nom}}$ and long term drift		4.90		5.25		11.64		12.36		11.64		12.36		V
	Idling voltage	$I_O = 0\text{ A}$				5.25		15.00		16.80		15.00		16.80		V
	Line regulation	$I_O = I_{O\text{ nom}}$				81		288		288				mV		
	Load regulation	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $I_{O2, 3} = I_{O\text{ nom}}$, $V_I = 26\text{ V}$				162								mV		
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $V_I = 26\text{ V}$ load step = 80% of $I_{O\text{ nom}}$		100		200		200						μs		
V_{tr}	Load transient voltage	$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$		+250		+600		+600						mV		
				-250		-600		-600						mV		
	Short term drift	$t = 0 \dots 10\text{ minutes}$		-15		-36		-36						mV		
T_{coeff}	Temperature coefficient	$I_O = I_{O\text{ nom}}$, $T_C < T_{C\text{ max}}$		-0.5		-1.2		-1.2						mV/ $^\circ\text{C}$		
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $V_I = 26\text{ V}$	$0.1 \dots 0.9 \times V_O$		20		20		20						ms	
t_s	Start-up time			From V_I connection to $V_O = 0.9 \times V_{Oi}$		30		30		30						ms
I_O	Output current			0		3.0		0		0.6		0		0.6		A
$P_{O\text{ max}}$	Max total output power	*						min 15								W
I_{lim}	Current limiting threshold	$T_C < T_{C\text{ max}}$						min $1.02 \times P_{O\text{ max}}^{**}$								
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up		<0.5		<0.5		<0.5								A
$V_{O\text{ ac}}$	Output ripple & noise	$I_O = I_{O\text{ nom}}$		20 Hz... 5 MHz		100		110		100						mV _{p-p}
				DC... 50 MHz		130		150		150						mV _{p-p}
				1 MHz bandwidth		40		40		40						mV _{rms}
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, 1 V_{p-p} , $V_I = 26\text{ V}$ (SVR = $20 \log(1\text{ V}_{p-p}/V_{O\text{ p-p}})$)		50		43		43								dB

* See also Power derating p. 13. Max output power on output 2 and 3 jointly is min 10 W

** I_{lim} on each output is set by the total load

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit	
η	Efficiency	$I_O = I_{O\text{ nom}}$, $V_I = 26\text{ V}$	79.5		81		%
P_d	Power dissipation	$I_O = I_{O\text{ nom}}$			3.5		W

PKC 2132 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified. $I_{O1\text{ nom}} = 2.0\text{ A}$, $I_{O2, 3\text{ nom}} = 0.17\text{ A}$

Output

Characteristics		Conditions	Output 1			Output 2			Output 3			Unit	
			min	typ	max	min	typ	max	min	typ	max		
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = I_{O\text{ nom}}$, $V_I = 26\text{ V}$		5.03	5.06	5.10	14.80	15.00	15.20	-14.80	-15.00	-15.20	V
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $I_{O2, 3} = I_{O\text{ nom}}$ and long term drift		4.90		5.25	14.40		15.60	14.40		15.60	V
	Idling voltage	$I_O = 0\text{ A}$				5.25	18.00		19.80	18.00		19.80	V
	Line regulation	$I_O = I_{O\text{ nom}}$				81	330			330		mV	
	Load regulation	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $I_{O2, 3} = I_{O\text{ nom}}$, $V_I = 26\text{ V}$				182						mV	
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $V_I = 26\text{ V}$ load step = 80% of $I_{O\text{ nom}}$		100			250			250		μs	
V_{tr}	Load transient voltage	$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$			+250		+750		+750			mV	
					-250		-750		-750			mV	
	Short term drift	$t = 0 \dots 10\text{ minutes}$		-15		-45		-45				mV	
T_{coeff}	Temperature coefficient	$I_O = I_{O\text{ nom}}$, $T_C < T_{C\text{ max}}$		-0.5		-1.5		-1.5				mV/ $^\circ\text{C}$	
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{ nom}}$, $V_I = 26\text{ V}$	$0.1 \dots 0.9 \times V_O$		20		20		20				ms
t_s	Start-up time		From V_I connection to $V_O = 0.9 \times V_{O_i}$		30		30		30				ms
I_O	Output current			0		3.0	0		0.5	0		0.5	A
$P_{O\text{ max}}$	Max total output power	*						min 15				W	
I_{lim}	Current limiting threshold	$T_C < T_{C\text{ max}}$						min $1.02 \times P_{O\text{ max}}$ **					
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up		<0.5		<0.5		<0.5				A	
$V_{O\text{ ac}}$	Output ripple & noise	$I_O = I_{O\text{ nom}}$	20 Hz... 5 MHz		100		110		100				mV _{p-p}
			DC... 50 MHz		130		150		150				mV _{p-p}
			1 MHz bandwidth		40		40		40				mV _{rms}
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, 1 V_{p-p} , $V_I = 26\text{ V}$ (SVR = $20 \log(1 \text{ V}_{p-p}/\text{V}_{O\text{ p-p}})$)		50		40		40				dB	

* See also Power derating p. 13. Max output power on output 2 and 3 jointly is min 10 W

** I_{lim} on each output is set by the total load

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{ nom}}$, $V_I = 26\text{ V}$	80	82		%
P_d	Power dissipation	$I_O = I_{O\text{ nom}}$		3.3		W

PKC 2135 PI

$T_C = 0 \dots +95^\circ\text{C}$, $V_I = 18 \dots 36\text{ V}$ unless otherwise specified. $I_{O1\text{nom}} = 2.0\text{ A}$, $I_{O2\text{nom}} = 0.2\text{ A}$, $I_{O3\text{nom}} = 0.5\text{ A}$

Output

Characteristics		Conditions	Output 1			Output 2			Output 3			Unit	
			min	typ	max	min	typ	max	min	typ	max		
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$, $I_O = I_{O\text{nom}}$, $V_I = 26\text{ V}$		5.03	5.06	5.10	11.90	12.10	12.30	-4.99	-5.06	-5.14	V
V_O	Output voltage tolerance band	$I_O = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $I_{O2,3} = I_{O\text{nom}}$ and long term drift		4.90		5.25	11.52		12.36	4.75		5.25	V
	Idling voltage	$I_O = 0\text{ A}$				5.25	15.00		16.00	6.00		6.50	V
	Line regulation	$I_O = I_{O\text{nom}}$				90	336			110		mV	
	Load regulation	$I_{O1} = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $I_{O2,3} = I_{O\text{nom}}$, $V_I = 26\text{ V}$				190						mV	
t_{tr}	Load transient recovery time	$I_O = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $V_I = 26\text{ V}$ load step = 80% of $I_{O\text{nom}}$		100			200			100		μs	
V_{tr}	Load transient voltage	$\frac{di}{dt} < 1\text{ A}/\mu\text{s}$		+250			+600			+250		mV	
				-250			-600			-250		mV	
	Short term drift	$t = 0 \dots 10\text{ minutes}$		-15								mV	
T_{coeff}	Temperature coefficient	$I_O = I_{O\text{nom}}$, $T_C < T_{C\text{max}}$		-0.5		-1.0		-0.5				$\text{mV}/^\circ\text{C}$	
t_r	Ramp-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $V_I = 26\text{ V}$	$0.1 \dots 0.9 \times V_O$		20		20		20		ms		
t_s	Start-up time	$I_O = 0.1 \dots 1.0 \times I_{O\text{nom}}$, $V_I = 26\text{ V}$	From V_I connection to $V_O = 0.9 \times V_{O_i}$		30		30		30		ms		
I_O	Output current			0		3.0	0		0.6	0		1.0	A
$P_{O\text{max}}$	Max total output power	*						min 15				W	
I_{lim}	Current limiting threshold	$T_C < T_{C\text{max}}$						min $1.02 \times P_{O\text{max}}^{**}$					
I_{sc}	Short circuit current	$V_O = 0.2 \dots 0.5\text{ V}$, $T_A = 25^\circ\text{C}$ Hick-up		<0.5		<0.5		<0.5				A	
V_{Oac}	Output ripple & noise	$I_O = I_{O\text{nom}}$		20 Hz... 5 MHz		100		110		100		mV_{p-p}	
				DC... 50 MHz		130		150		120		mV_{p-p}	
				1 MHz bandwidth		40		40		35		mV_{rms}	
SVR	Supply voltage rejection (ac)	$f = 100\text{ Hz}$ sine wave, 1 V_{p-p} , $V_I = 26\text{ V}$ ($\text{SVR} = 20 \log(1\text{ V}_{p-p}/V_{O\text{p-p}})$)		50		43		50				dB	




* See also Power derating p. 13. Max output power on output 2 and 3 jointly is min 10 W

** I_{lim} on each output is set by the total load




Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$I_O = I_{O\text{nom}}$, $V_I = 26\text{ V}$	79.5	81		%
P_d	Power dissipation	$I_O = I_{O\text{nom}}$		3.5		W




PKC 2111 PI

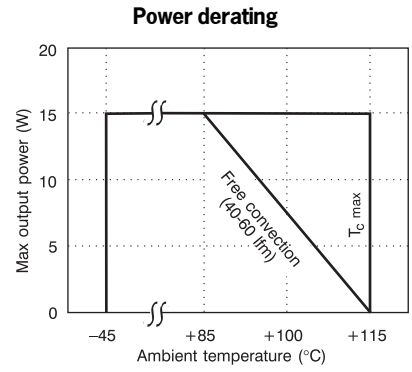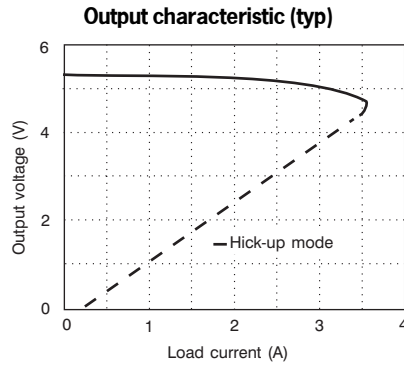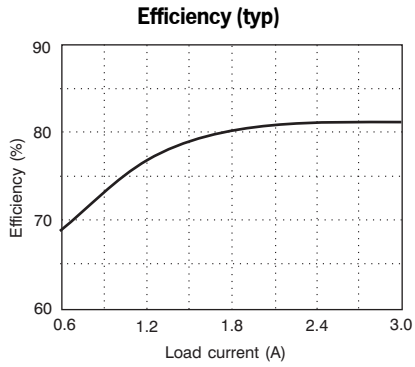




PKC 2113 PI

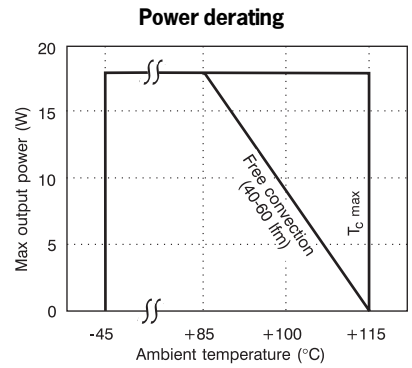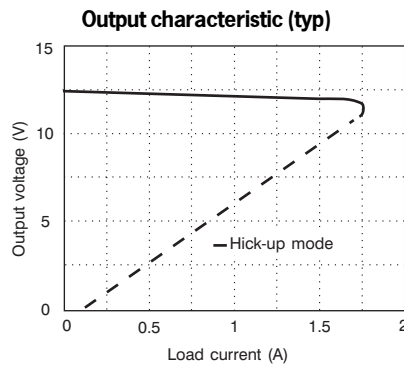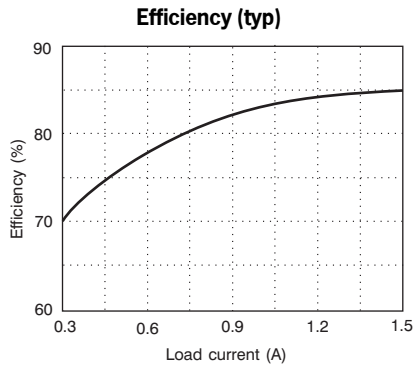

PKC 2121 PI

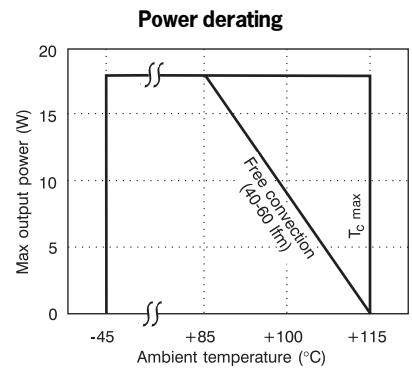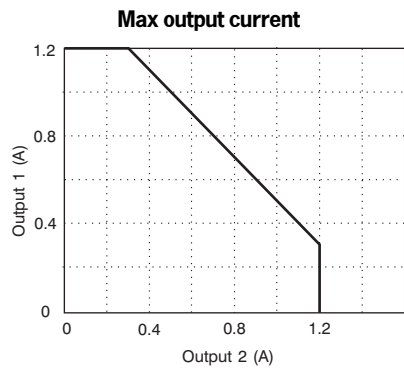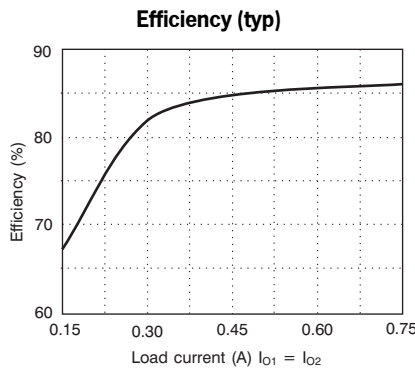


PKC 2126 PI

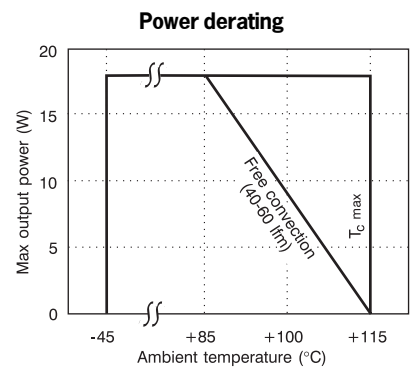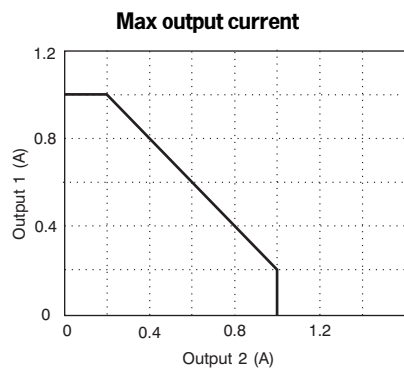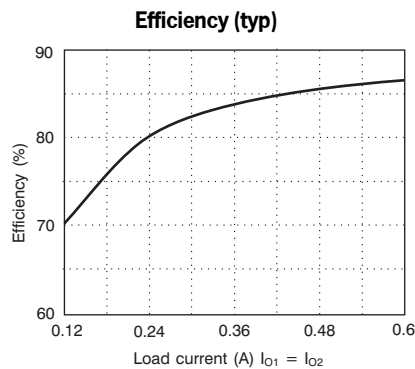


PKC 2131 PI


Efficiency (typ)

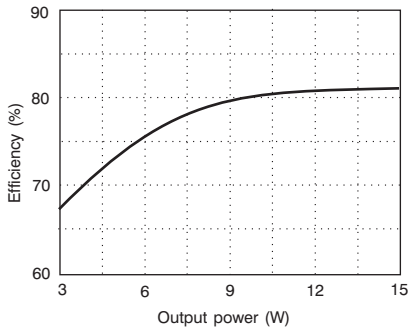

Max output current




Power derating

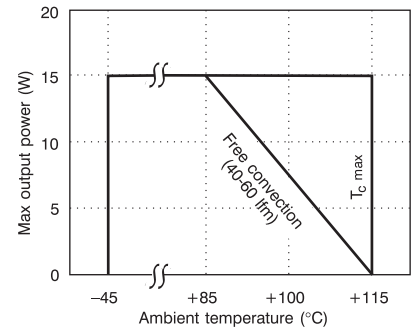


PKC 2132 PI


Efficiency (typ)

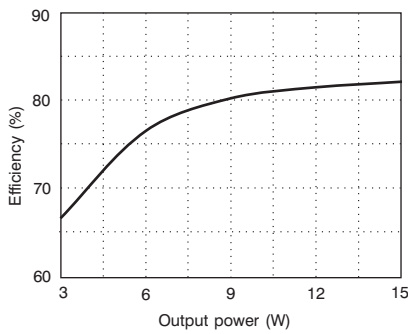

Max output current




Power derating

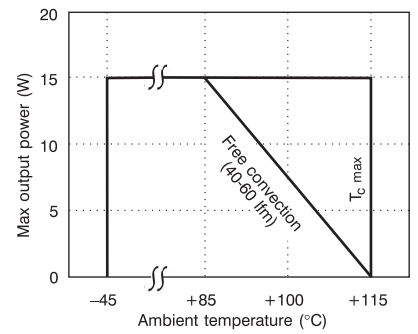


PKC 2135 PI


Efficiency (typ)

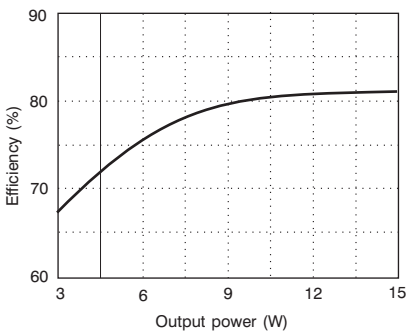

Max output current




Power derating

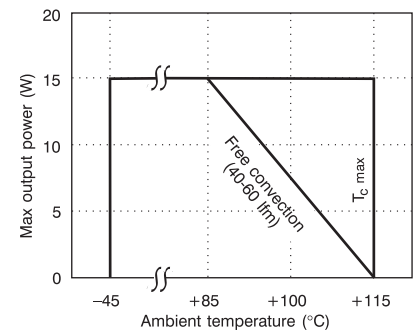

EMC Specifications


The PKC power module is mounted on a double sided printed circuit board (PB) with groundplane during EMC measurements. The fundamental switching frequency is 300 kHz ± 15% @ $I_O = I_{Omax}$ or I_{Onom}

Conducted EMI (input terminals)

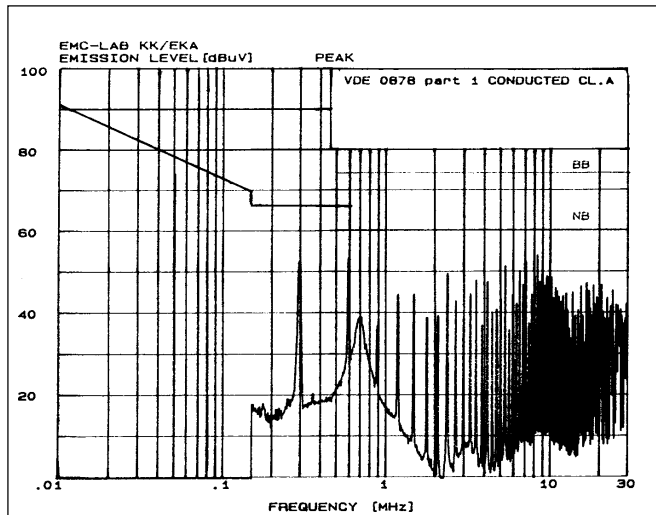

PKC series typical conducted EMI performance

Test set up

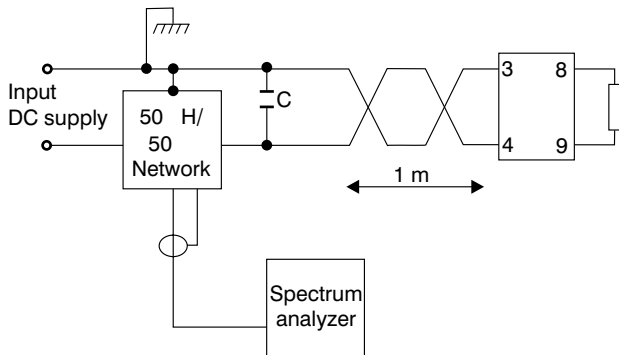

C = 4.7 mF electrolytic to prevent oscillations on supply mains

The PKC meets class A in VDE 0871/0878, FCC Part 15J, and CISPR 22 (EN 55022).

Radiated EMI

To minimize radiation it is recommended to have a ground or earth plane in the printed board (PB).

Output Ripple & Noise (V_{Oac})

Output ripple & noise is measured at the output terminals with a 50 MHz oscilloscope and a true rms DVM (crest factor >4.5). The oscilloscope's input impedance should be adapted to the impedance of the coax cable and the output terminal connection should have a minimum ground wire loop.

Operating information

Remote Control (RC)

Turn-on or turn-off can be realized by using the RC-pin. Normal operation is achieved if pin 1 is open (NC). If pin 1 is connected to pin 3 the PKC DC/DC power module turns off. To ensure safe turn-off the voltage difference between pin 1 and 3 shall be less than 1.8 V. RC is TTL open collector compatible (see fig. 1). Pin 1 is an output and no current should be driven into pin 1. Use a diode if necessary e.g. totem pole TTL logic. The internal pull-up resistance is 15 kΩ.

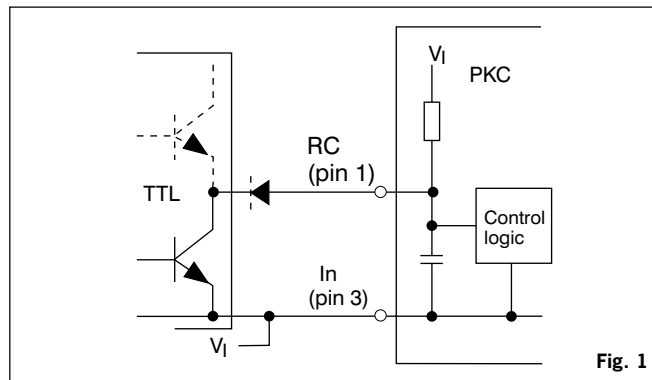


Fig. 1

Input and Output Impedance

Both the source impedance of the power feeding and the load impedance will interact with the impedance of the DC/DC power module. It is most important to have the ratio between L and C as low as possible, i.e. a low characteristic impedance, both at the input and output, as the power modules have a low energy storage capability. A capacitive compensation is necessary if the source or load inductance is larger than 10 μH. Use wet electrolytic capacitors. Their equivalent series resistance together with the capacitance acts as a lossless damping filter. Suitable capacitor values are in the range 10–100 μF. Tantalum capacitors are not suitable due to their low ESR-value.

Over Voltage Protection (OVP)

The remote control can be utilized also for OVP by using the external circuitry in fig. 2. Resistor values are for 5 V output applications, but can easily be adjusted for other output voltages and the desired OVP level.

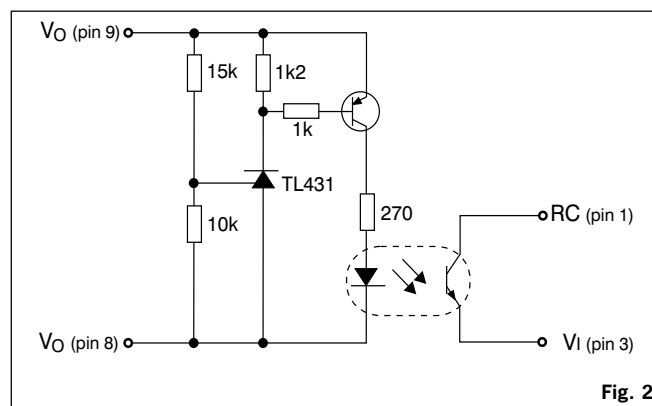


Fig. 2

Turn-off Input Voltage (V_{Ioff})

The input voltage is monitored and the PKC DC/DC power module will turn on and turn off at predetermined levels. The levels can be decreased by means of an external resistor connected between pin 1 and pin 5.

A 80 k Ω resistor will decrease the shutdown voltage below 17 V. To maintain the nominal output voltage at input voltages below V_{Imin} it may be necessary to decrease the load.

Maximum Capacitive Load

The maximum recommended capacitance connected direct to the PKC DC/DC power modules output without resistance or inductance in series is 100 μ F/A (output current rating). Connect capacitors across the load for maximum effectiveness and maximum stability margins.

Current Limiting Protection

The output power is limited at loads above the output current limiting threshold (I_{lim}), specified as a minimum value.

As the PKC multiple output models are power limited, current limiting threshold for an individual output is set by the loads on the other outputs. The power module can withstand continuous short circuit without destruction. A hick-up mode is used on all models to minimize the internal power dissipation. The hick-up time constant is set by the slow start.

Quality

Reliability

Meantime between failure (MTBF) is calculated and verified by field data statistics to >2 million hours at full output power and a case temperature of 75°C, using the Ericsson failure rate data system. For more information see Design Note 002.

Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, 6 σ and SPC, are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out by a burn-in procedure and an ATE-based final test.

Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of our products.

Warranty

Ericsson Components warrants to the original purchaser or end user that the products conform to this Data Sheet and are free from material and workmanship defects for a period of five (5) years from the date of manufacture, if the product is used within specified conditions and not opened. In case the product is discontinued, claims will be accepted up to three (3) years from the date of the discontinuation. For additional details on this limited warranty we refer to Ericsson Components AB's "General Terms and Conditions of Sales", EKA 950701, or individual contract documents.

Limitation of liability

Ericsson Components does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

Ericsson Components Sales Offices:

Brazil:	Phone: +55 11 759 6622 Fax: +55 11 759 5208
Denmark:	Phone: +45 33 883 109 Fax: +45 33 883 105
Finland:	Phone: +358 9 299 4098 Fax: +358 9 299 4188
France:	Phone: +33 1 4083 7717 Fax: +33 1 4083 7588
Germany:	Phone: +49 211 534 1516 Fax: +49 211 534 1525
Great Britain:	Phone: +44 1793 488 300 Fax: +44 1793 488 301
Hong Kong:	Phone: +852 2590 2451 Fax: +852 2590 7152
Italy:	Phone: +39 2 7014 4207 Fax: +39 2 7014 4260
Japan:	Phone: + 81 3 3222 6668 Fax: +81 3 3222 6903
Norway:	Phone: +47 66 841 906 Fax: +47 66 841 909
Russia:	Phone: +7 095 247 6211 Fax: +7 095 247 6212
Spain:	Phone: +34 1 339 1809 Fax: +34 1 339 3145
Sweden:	Phone: +46 8 721 7500 Fax: +46 8 721 7001
United States:	Phone: +1 888 853 6374 Fax: +1 972 583 7999

Information given in this data sheet is believed to be accurate and reliable. No responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Components. These products are sold only according to Ericsson Components' general conditions of sale, unless otherwise confirmed in writing. Specifications subject to change without notice.