




1 产品特性 Product Specialties

- 1.1 内部结构集成式 Internal structure integration type;
- 1.2 外部结构标准式 External structure standard type;
- 1.3 整定设置简单式 Adjusting set-up simplifying type;
- 1.4 功能模式多样性 Function mode diversification type。

2 产品型号及含义 Product Types and Meanings

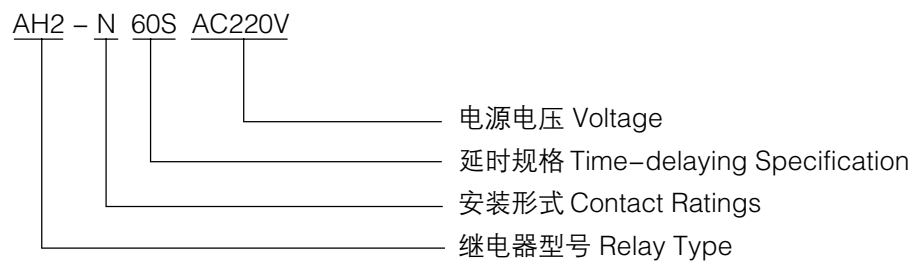

3 主要技术参数 Main Technological Parameter

电源电压 Voltage	DC12V~DC220V, AC12V~380V
延时范围 Time Range	1S~10h(A,B,C,D)
安装形式 Contact Ratings	N: 装置式; Y: 面板式 N: Installation Type; Y: Panel type
触点容量 Contact Capacity	AC220V: 5A DC24V: 7A
环境温度 Operating Temperature	-10℃ ~ 50℃
湿度 Humidity	35%~85%
电寿命 Electricity Life	1 × 10 ⁵ 次

对应型号 Parallelism Type	工作模式 Work Mode	延时范围 Time Range
AH2-NA,AH2-Y	通电延时 On-delay	1S~10h
ATDV-N	循环延时 Circulation delaying	1S~10h
TRD-N	星三角延时 Star-delta time delay	1S~60S

4 外形安装尺寸、接线图、工作时序图

Outline and mounting dimensions, Wiring drawing, Work time-sequence drawing

