


### 1 产品特性 Product Specialties

- 1.1 内部结构集成式 Internal structure integration type;
- 1.2 外部结构标准式 External structure standard type;
- 1.3 整定设置简单式 Adjusting set-up simplifying type;
- 1.4 功能模式多样式 Function mode diversification type.

### 2 产品型号及含义 Product Types and Meanings

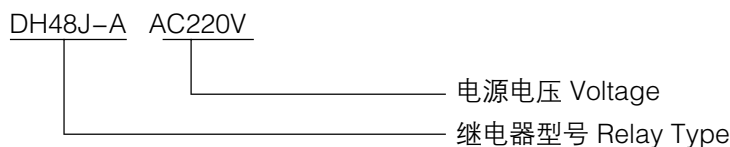

### 3 主要技术参数 Main Technological Parameter

电源电压 Voltage	DC12V~DC220V, AC12V~380V
延时范围 Time Range	1-9999, 倍率(× 1 × 10 × 100)
安装形式 Contact Ratings	面板式 Panel type
触点容量 Contact Capacity	AC220V; 5A DC24V; 7A
环境温度 Operating Temperature	-10℃ ~ 50℃
湿度 Humidity	35%~85%
电寿命 Electricity Life	1 × 10 <sup>5</sup> 次

型号 Type	功能机械模式 function machine mode	计数 Computation
DH48J-A	带保持 with retaining	加计数 counting for add
DH48J-B	带保持 with retaining	加减计数 counting for add/reduce
JDM9-6	带保持 with retaining	加减计数 counting for add/reduce
DH14J	不带保持 without retaining	加计数 counting for add
DH48J	不带保持 without retaining	加计数 counting for add
JDM9-4	不带保持 without retaining	加减计数 counting for add/reduce
ASK	带保持 with retaining	加计数 counting for add
H7EC	带保持 with retaining	加计数 counting for add
DH48L	带保持 with retaining	累计时间: accumulation time

#### 4 外形安装尺寸、接线图、工作时序图

Outline and mounting dimensions, Wiring drawing, Work time-sequence drawing

