



1 产品型号及含义 Product Types and Meanings

DZ-612


继电器型号 Relay type

2 性能参数 Specification

型号 Type		
动作电压 Bick-up voltage		$\leq 85\mu\text{s}, 85\%$ of rated voltage
释放电压 Drop-out voltage	AC	$\geq 30\mu\text{s}, 30\%$ of rated voltage
	DC	$\geq 10\mu\text{s}, 10\%$ of rated voltage
最大连续工作电压 Max supply voltage		$110\mu\text{s}, 110\%$ of rated voltage
动作时间 Operating time		20ms
释放时间 Release time		20ms
线圈电压 Coil voltage	AC	6~380V
	DC	6~220V
线圈额定功率 Nominal coil power		1.5W/2.5VA
额定绝缘电压 Rated insulation voltage		250V
接触电阻 Contaet resistance		$\leq 50\text{m}\Omega$ (初始值 Before use)
绝缘电阻 Contaet resistance		$\geq 500\text{M}\Omega$
介质耐压 Insulation strength		同组触头间 AC1000V, 1min 电器回路间 AC1500V , 1min
开闭频率 Operation cycle		30cpm
振动 Vibration		10~50Hz 双振幅 Dual amplitude: 1.5mm
冲击 Shock		20G(正弦半波脉冲: 11ms) (Half a wave of pules of sine: 11ms)
环境温度 Ambient temperature		-20°C ~ +55°C
环境湿度 Humidity		35%~85%RH
大气压力 Atmospheric		86~106KPa

型号 Type	
机械寿命 Mechanical life	1×10^7
电寿命 Electrical life	1×10^5
触头负载(阻性)Contact capacity	5A/250VAC 28V DC
重量 Net weight	$\leq 70g$

3 外形图、接线图、安装孔尺寸 Dimension, Bottom View

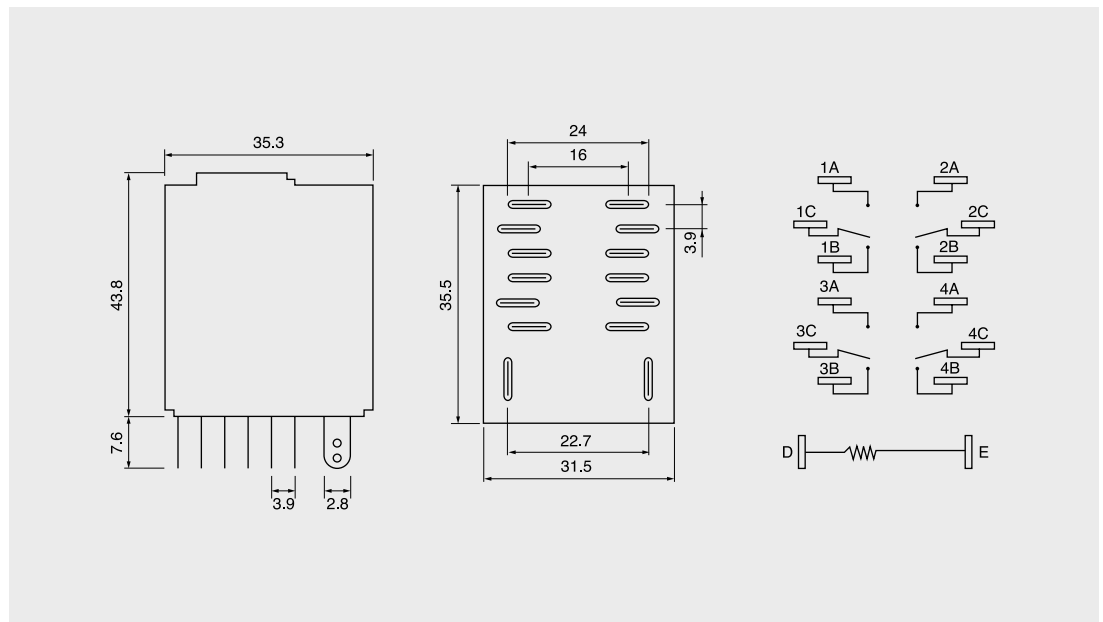

4 性能曲线图 Reference Data

