




1 产品型号及含义 Product Types and Meanings

JJDZ3-□□



触点型式 Contact form:

33: 3组转换 3PDT


继电器型号 Relay type

2 性能参数 Specification

型号 Type		
动作电压 Bick-up voltage	≤ 80%us,80% of rated voltage	
释放电压 Drop-out voltage	10%us,10% of rated voltage	
最大连续工作电压 Max supply voltage	110%us,110% of rated voltage	
动作时间 Operating time	30ms	
释放时间 Release time	30ms	
线圈电压 Coil voltage	6~220V	
线圈额定功率 Nominal coil power	3W	
额定绝缘电压 Rated insulation voltage	250V	
接触电阻 Contaet resistance	≤ 50mΩ(初始值 Before use)	
绝缘电阻 Contaet resistance	≥ 500MΩ	
介质耐压 Insulation strength	AC1500VAC/1min	
开闭频率 Operation cyele	30cpm	
振动 Vibration	10~50Hz 双振幅 Dual amplitude: 1.00mm	
冲击 Shock	20G	

型号 Type	
机械寿命 Mechanical life	1×10^7
电寿命 Electrical life	1×10^5
触头负载(阻性)Contact capacity	3A/250VAC 28V DC
重量 Net weight	$\leq 85g$

3 外形图、接线图、安装孔尺寸 Dimension, Bottom View

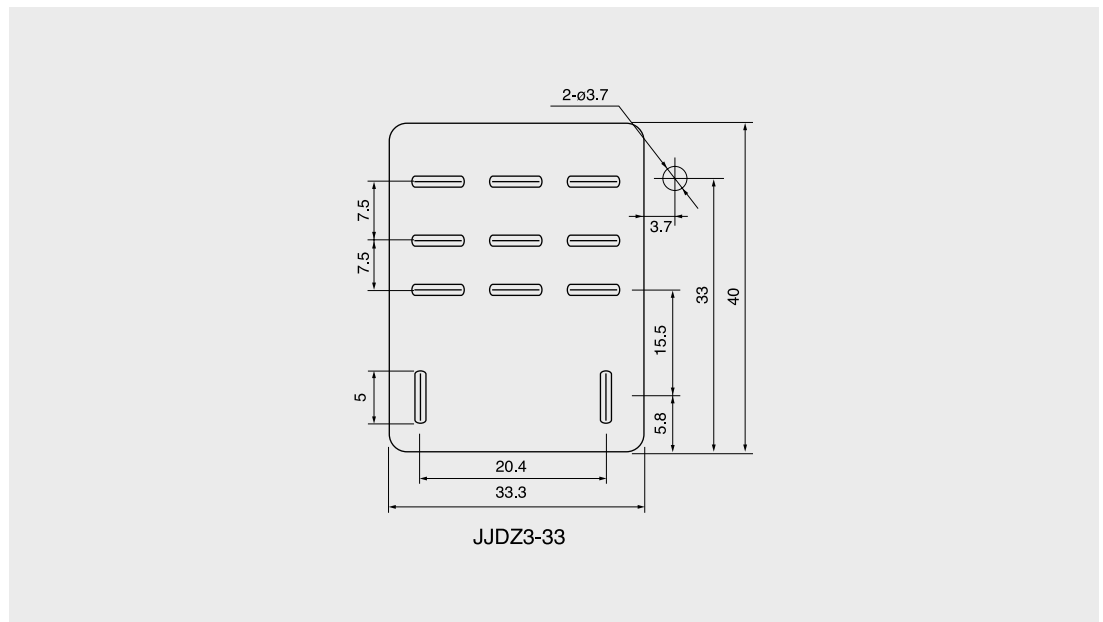

4 性能曲线图 Reference Data

