




1 产品型号及含义 Product Types and Meanings

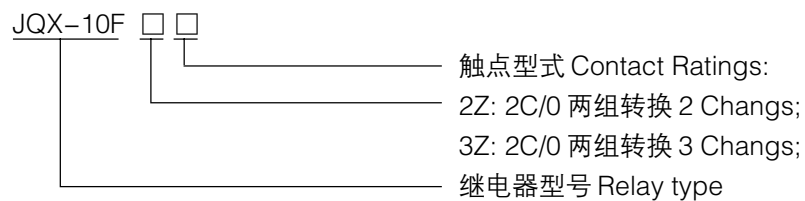


2 性能参数 Specification

型号 Type		
动作电压 Bick-up voltage		$\leq 75\mu s, 75\%$ of rated voltage
释放电压 Drop-out voltage	AC	$\geq 30\mu s, 30\%$ of rated voltage
	DC	$\geq 15\mu s, 15\%$ of rated voltage
最大连续工作电压 Max supply voltage		$110\mu s, 110\%$ of rated voltage
动作时间 Operating time		$\leq 30ms$
释放时间 Release time		$\leq 30ms$
线圈电压 Coil voltage	AC	6~380V
	DC	6~220V
线圈额定功率 Nominal coil power		1.6W/2.7VA
额定绝缘电压 Rated insulation voltage		250V
接触电阻 Contaet resistance		$\geq 50m\Omega$ (初始值 Before use)
绝缘电阻 Contaet resistance		$\geq 500M\Omega$ (500V DC)
介质耐压 Insulation strength		1500V AC/1min
开闭频率 Operation cyele		30cpm
振动 Vibration		—
冲击 Shock		—
环境温度 Ambient temperature		$-10^{\circ}C \sim +55^{\circ}C$
环境湿度 Humidity		35%~85%RH
大气压力 Atmospheric		86~106KPa

型号 Type		
机械寿命 Mechanical life	1 × 10 ⁷	
电寿命 Electrical life	1 × 10 ⁵	
触头负载(阻性)Contact capacity	7.5A/250VAC 28V DC	
重量 Net weight	≤ 80g	

3 外形图、接线图、安装孔尺寸 Dimension,Bottom View

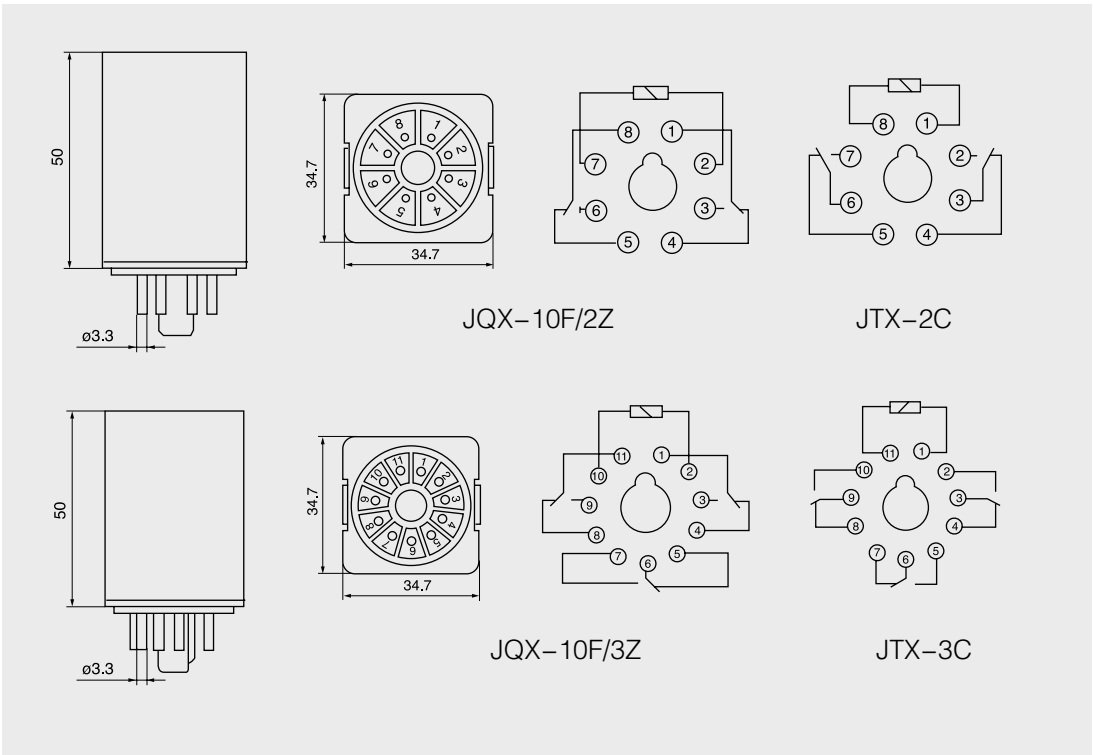

4 性能曲线图 Reference Data

