




1 产品特性 Product Specialties

- 1.1 内部结构集成式 Internal structure integration type;
- 1.2 外部结构标准式 External structure standard type;
- 1.3 整定设置简单式 Adjusting set-up simplifying type;
- 1.4 功能模式多样性 Function mode diversification type。

2 产品型号及含义 Product Types and Meanings

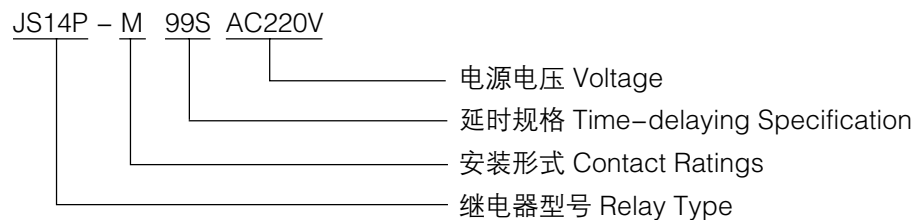

3 主要技术参数 Main Technological Parameter

电源电压 Voltage	DC12V~DC220V, AC12V~380V
延时范围 Time Range	0.01S~999h
安装形式 Contact Ratings	不标注: 装置式; -M: 面板式 No remark: Installation Type; -M: Panel type
触点容量 Contact Capacity	AC220V: 5A DC24V: 7A
环境温度 Operating Temperature	-10℃ ~ 50℃
湿度 Humidity	35%~85%
电寿命 Electricity Life	1 × 10 ⁵ 次

对应型号 Parallelism Type	工作模式 Work mode	延时范围 Time Range	显示方式 Display Way
JS14P	通电延时 On-delay	0.01S~999h	发光管 luminous pipe
JS14P/D	断电延时 Off-delay	0.1S~99S	发光管 luminous pipe
JSS20-21AMZ	循环延时 Circulation delaying	0.1S~99S	发光管 luminous pipe
JS14P/G	释放延时 Release delaying	0.01S~999h	发光管 luminous pipe
JS14C	通电延时, 单时段 On-delay, single period of time	0.01S~99h	数码管 Digital pipe
JS14B	通电延时, 多时段 On-delay, multi-period of time	0.01S~990h	发光管 luminous pipe

4 外形安装尺寸、接线图、工作时序图

Outline and mounting dimensions, Wiring drawing, Work time-sequence drawing

