



1 产品型号及含义 Product Types and Meanings




2 性能参数 Specification

型号 Type	
动作电压 Bick-up voltage	85%us, 85% of rated voltage
释放电压 Drop-out voltage	20%us, 20% of rated voltage
最大连续工作电压 Max supply voltage	110%us, 110% of rated voltage
动作时间 Operating time	30ms
释放时间 Release time	30ms
线圈电压 Coil voltage	24, 36, 48, 110, 127, 220, 380V
线圈额定功率 Nominal coil power	7.5VA
额定绝缘电压 Rated insulation voltage	440V
接触电阻 Contaet resistance	≤ 50mΩ(初始值 Before use)
绝缘电阻 Contaet resistance	≥ 1000MΩ
介质耐压 Insulation strength	继电器用 RL1-15/15A 熔断器作短路保护时能承受 1000A 的短路电流 When the relay adopts RL-15/15A fuse as short circuit protection, it can bear short circuit current of 1000A.
环境温度 Ambient temperature	-25℃ ~ +40℃
环境湿度 Humidity	50%~90%RH
大气压力 Atmospheric	86~120KPa

型号 Type	
机械寿命 Mechanical life	6 × 10 ⁶
电寿命 Electrical life	5 × 10 ⁵
触头负载(阻性)Contact capacity	触头发热试验电流为 6A The current is 6A in contact heating experiment.
重量 Net weight	580g

3 外形图、接线图、安装孔尺寸 Dimension, Bottom View

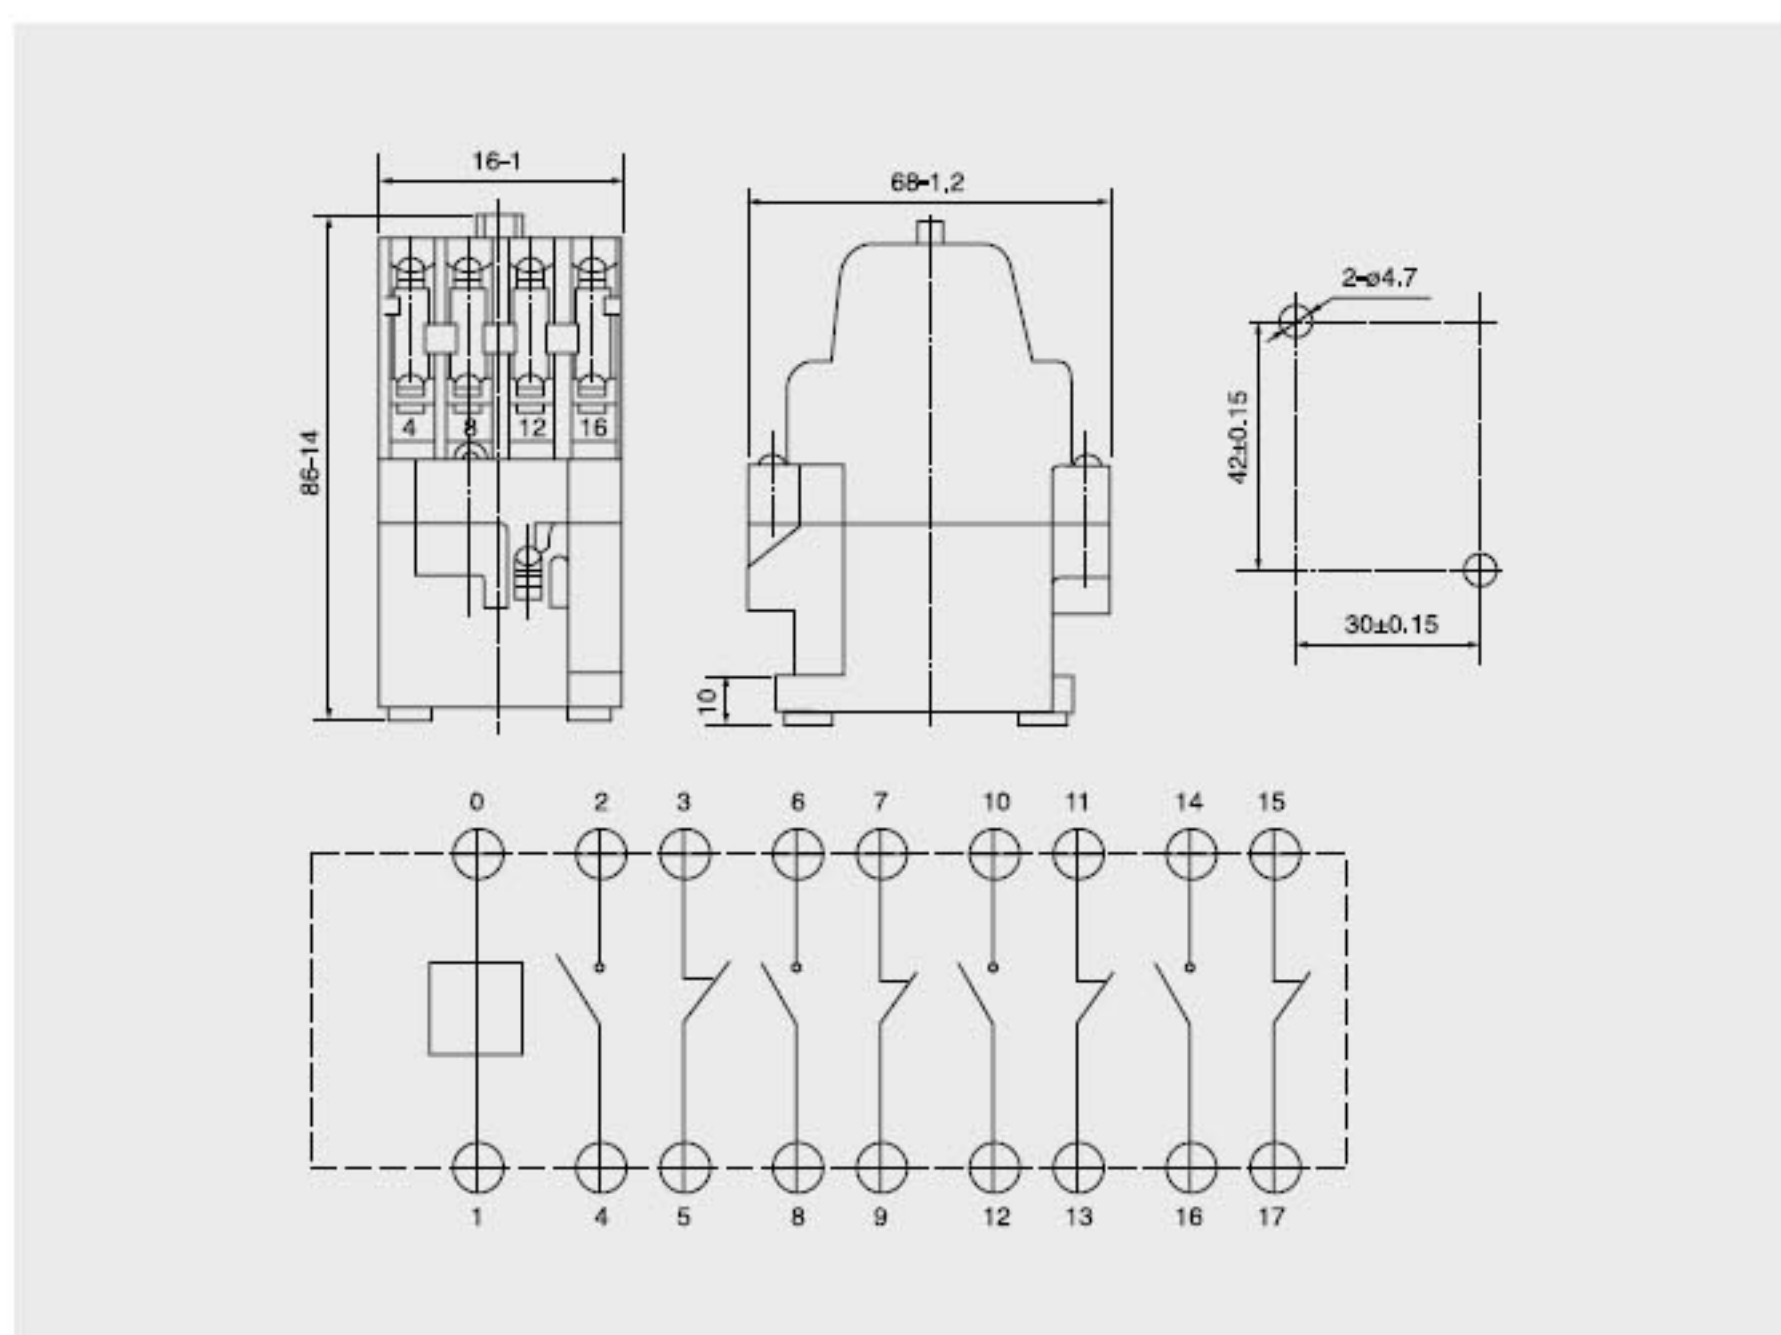

4 性能曲线图 Reference Data

