


### 1 产品特性 Product Specialties

- 1.1 内部结构集成式 Internal structure integration type;
- 1.2 外部结构标准式 External structure standard type;
- 1.3 整定设置简单式 Adjusting set-up simplifying type;
- 1.4 功能模式多样性 Function mode diversification type.

### 2 产品型号及含义 Product Types and Meanings

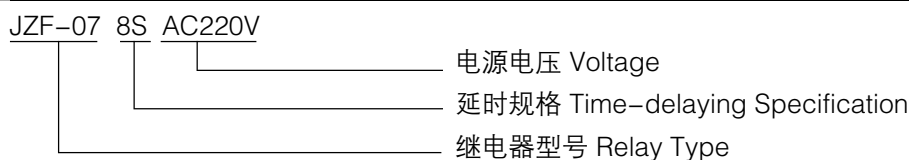

### 3 主要技术参数 Main Technological Parameter

|                            |  |  |
|----------------------------|--|--|
| 电源电压 Voltage               | DC12V~DC220V, AC12V~380V   |  |
| 延时范围 Time Range            | 正转 8m 停止 8s 反转<br>Obversely rotating for 8m, Pausing for 5s 8s, reversely rotate |  |
| 安装形式 Contact Ratings       | 装置式 Installation type  |  |
| 触点容量 Contact Capacity      | AC220V: 5A DC24V: 7A   |  |
| 环境温度 Operating Temperature | -10°C ~ 50°C   |  |
| 湿度 Humidity                | 35%~85%  |  |
| 电寿命 Electricity Life       | 1 × 10 <sup>5</sup> 次  |  |
| 型号 Type                    | 工作模式 Work mode   | 延时范围 Time Range                          |
| JZF-01                     | 正反转 Obversely/<br>reversely rotate   | 正反转 15/25s, 停止(Pausing)5s                |
| JZF-05                     |  | 正反转 15s, 停止(Pausing)5s, 脱水(Dewatering)5s |
| JZF-06                     |  | 正反转 16s, 停止(Pausing)4s                   |
| JZF-07                     |  | 正反转 8m, 停止(Pausing)8s                    |

### 4 外形安装尺寸、接线图 Outline and mounting dimensions, Wiring drawing

