




1 产品特性 Product Specialties

- 1.1 内部结构集成式 Internal structure integration type;
- 1.2 外部结构标准式 External structure standard type;
- 1.3 整定设置简单式 Adjusting set-up simplifying type;
- 1.4 功能模式多样性 Function mode diversification type。

2 产品型号及含义 Product Types and Meanings

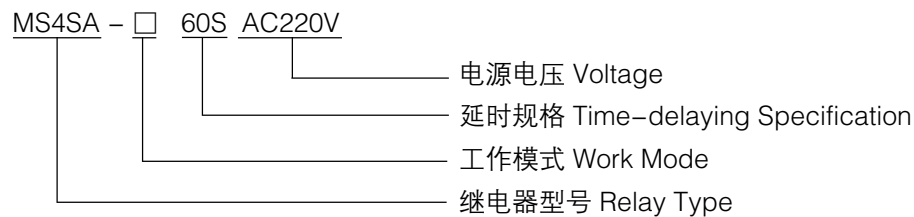

3 主要技术参数 Main Technological Parameter

电源电压 Voltage	DC12V~DC220V, AC12V~380V
延时范围 Time Range	0.5S~12h
安装形式 Contact Ratings	不标注: 装置式; -M: 面板式; -Y: 外接式 No remark: Installation Type; -M: Panel type; -Y: connecting-out type
触点容量 Contact Capacity	AC220V: 5A DC24V: 7A
环境温度 Operating Temperature	-10℃ ~ 50℃
湿度 Humidity	35%~85%
电寿命 Electricity Life	1 × 10 ⁵ 次

对应型号 Parallelism Type	工作模式 Work mode	延时范围 Time Range
MS4SA	通电延时 On-delay	0.5S~12h
MS4SA-F	断电延时 Off-delay	1S~900S
MS4SA	循环延时 Circulation delaying	0.5S~12h
MS4SA	释放延时 Release delaying	0.5S~12h
MS4SC	通电延时带瞬动 Electrification delaying with instantaneous release	0.5S~12h
MS4SY	星三角转换 Star-delta change over	0.5S~12h

4 外形安装尺寸、接线图、工作时序图

Outline and mounting dimensions, Wiring drawing, Work time-sequence drawing

