

Timer
SEW - Pulse-on operate with 1 Changeover
 11.25mm housing



Application

Time control

Description

The **SEW Pulse-on operate timer** offers 16 different timing intervals in one unit. The timing intervals can be adjusted with DIP switches on the upper panel of the relay. The timer can operate on either 230V AC using terminals A1 and A2 or 24V DC using terminals A3 and A2. The green LED indicates the connection to the power supply.

Function

The timing begins with the connection of the power supply to the terminals A1 and A2 or A3 and A2. After applying the power supply the output relay is energized without delay and is de-energized after the pulse set time has elapsed. The red LED indicates the working position of the output relay. If the power supply is disconnected before the set pulse time has elapsed, the output relay is de-energized with no delay. This also applies if the supply is disconnected during the timing period.

Option

Other timing ranges and voltages available upon request.

Part Number

011067


SEW Pulse-on operate
16 Timing ranges / 1 Changeover

Timing ranges

16 timing ranges adjustable with DIP switches

0.05 – 1 s	0.5 – 10 min
0.15 – 3 s	1.5 – 30 min
0.5 – 10 s	3 – 60 min
1.5 – 30 s	15 – 300 min
3 – 60 s	0.5 – 10 h
5 – 100 s	1.5 – 30 h
10 – 200 s	3 – 60 h
15 – 300 s	5 – 100 h


DIP switch adjustments

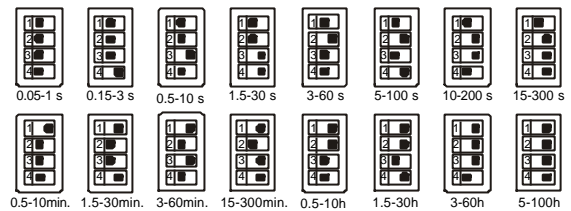

Approvals



Function diagram

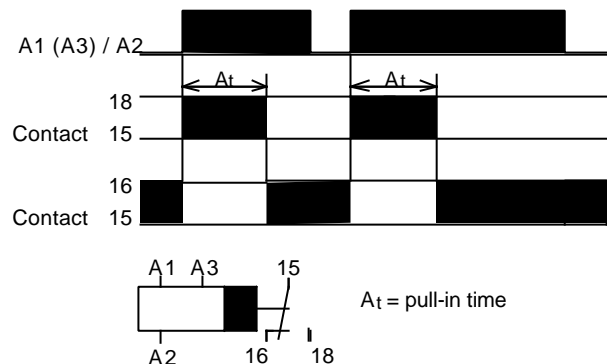

Mounting

Snap-on mounting using a standard DIN rail EN 50022. The unit is designed to allow side-by-side mounting, with an ambient temperature of < 60°C.

Timer
SEW - Pulse-on operate with 1 Changeover
 11.25mm housing

Technical data

Supply

Supply voltage A1/A2: 230V AC -15 / +10%
 A3/A2: 24V AC/DC -15 / +10%

Frequency range: 0 / 50 ... 60Hz
 Power consumption: approx. 1.5W with DC
 approx. 6VA with AC
 Operating mode: continuous
 Supply voltage influence: < 0.01% over voltage range

Temperature influence: < 0.01%/°C
 Recovery time: < 100ms
 Repetitive accuracy: ± 0.2%

Operation indicators

Supply voltage: LED, green
 Relay in working position: LED, red


Contact

Number of changeovers: 1
 Contact material: AgSnO₂
 Maximum switching voltage: 250V AC
 Maximum switching current: 4A
 Drop-off time of switching element: approx. 20ms
 Mechanical life: 30 Mio.
 Electrical life (with rated load): 0.8 Mio.

General data


Ambient temperature: - 25 ... + 60°C
 Climate resistance: VDE 0435T.2021
 Mounting position: any
 Vibration resistance: VDE 0435T.2021
 Test voltage: 2.5kV
 Isolation group: VDE 0110 Group C 250
 Protection class: Terminals IP 20
 Housing IP 40
 Connection terminals: Crosshead screws; M3.5 self-opening
 Connection cross section: Multi-strand wire with wire sleeves 2 x 2.5mm²
 single-wire 2 x 2.5mm²
 Finger touch protection: VDE 0106T.100 and VBG4
 Mounting: Symmetrical rail DIN EN 50022
 Dimensions l x w x h: 78mm x 11.25mm x 110mm
 Weight: 66g

Example

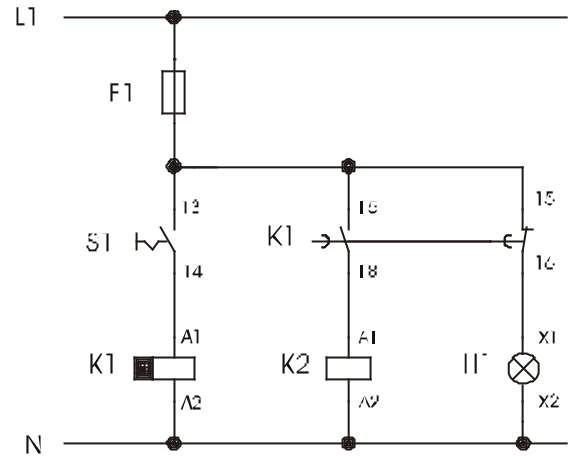

When the contact S1 closes, K2 energizes immediately and the light H1 goes off. Upon completion of the selected timing period K1 returns to its rest position and the light H1 comes on.

Dimensions

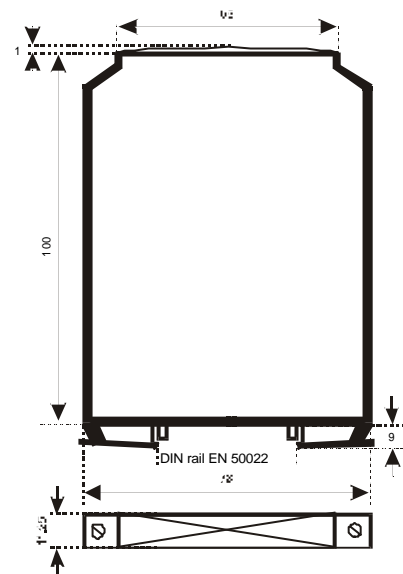

Connections

The terminal assignment for the connections is located on the front panel of the relay. **Reading the front panel from top to bottom**, the connections are in the following order:

LED side: nc – A1 – A3 - 15
 Potentiometer side: nc – A2 – 16 – 18

上海悦中电气设备有限公司
 上海恒通路360号一天下大厦24C
 TEL : 021 - 62246890
 FAX : 021 - 52240873
 Http://www.skjd.cn
 E-mail : shskjd@126.com