

# Concave Grating

## Rowland Circle Mounting




Order number 792044-0000-000

### Grating specification

Groove density	2400 ± 3 l/mm
Groove profile	Sinusoidal
Diffraction grating area	≥ Ø 44 mm
Reflective coating	Aluminum (unprotected)
Grating master type	Holographically recorded
Grating type	Epoxy replica (copy)
Storage and transport temperature	-40 °C ... +70 °C (non-condensing environment)

### Mounting specification (Schematic drawing)

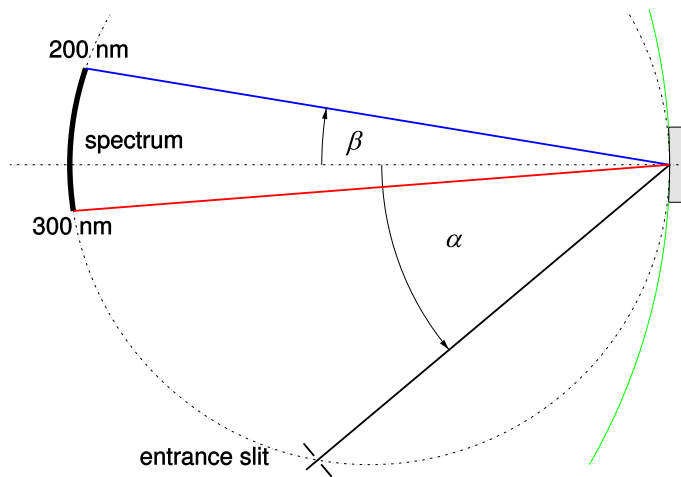



By historic convention clockwise incident and diffraction angles are positive.

### Optical grating characteristics

Diffraction efficiency (unpolarized @ cAD = 32°)

215 nm	≥ 40 %
275 nm	≥ 33 %
375 nm	≥ 28 %

### Typical relative diffraction efficiency (rDE) in first diffraction order

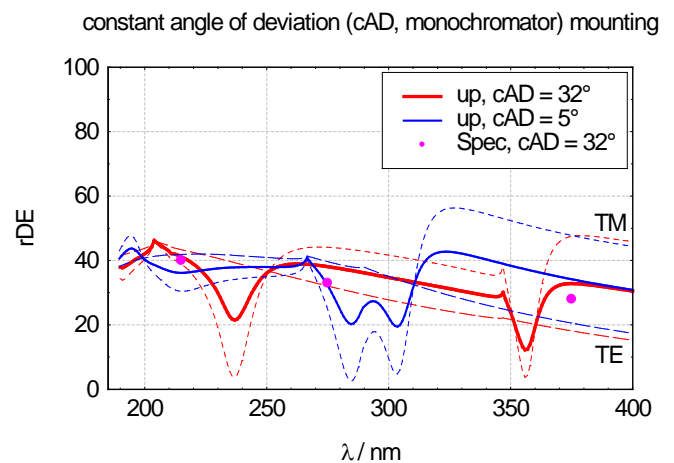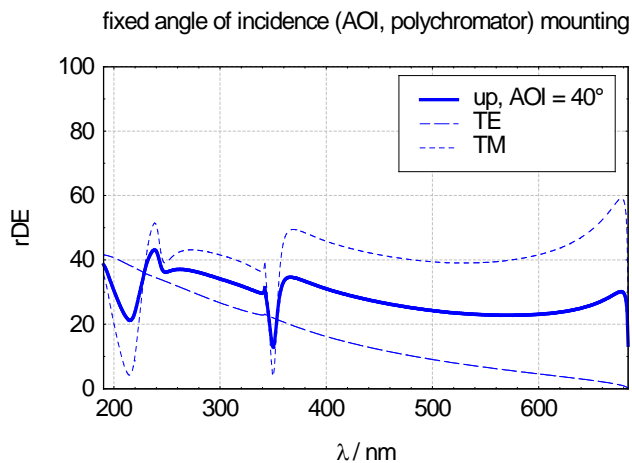

Typical efficiency curves based on rigorous electromagnetic modeling using measured AFM profiles. rDE refers to the ratio between diffracted power from the grating and reflected power from a mirror coated with the same material.

### Blank specification

Material	ZKN7 (optical glass)
Radius of curvature	398.83 mm
Protective bevel (left surface)	0.5 mm

