

HVR1A05



- High Voltage Reed Relay
- Coil Voltage 5V
- Breakdown up to 4KV

Misensor Tech (Shanghai) Co., Ltd
Add: No. 25 Hangming Road Hangtuo Town,
Pudong new district, Shanghai
TEL: 021- 60976200 FAX: 021-60976212
Http: //www.Misensor.cn
E-mail: Postmaster@misensing.com

[Outline Dimension]


Unit: mm

Scale: 2.5:1

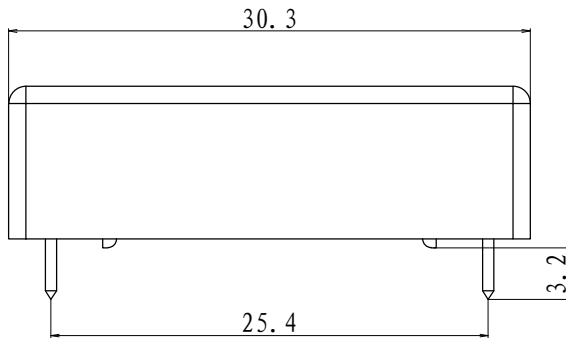

[Pin Layout]


[Top View]

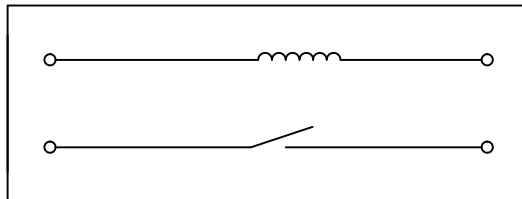

Order Information

HVR1A05

Coil Parameters		Relay Parameters	
1 Nominal coil voltage	5.0 VDC	1 Min Breakdown Voltage	4K VDC
2 Max Operating voltage	7.0 VDC	2 Dielectric Strength coil/contact	4K VDC
3 Max Pull-in voltage	3.8 VDC	3 Insulation Resistance coil/contact	1.00E+12ohm
4 Min Drop-out voltage	0.5 VDC	4 Operate Time, incl. Bounce	1.0ms
5 Coil Resistance	100ohm	5 Reset Time	0.1ms
Contact Parameters		6 Capacitance Across Contacts	0.2pF
1 Max Contact Rating	100 W	7 Storage Temperature	-35 ⁻ +105 [°] C
2 Max Switch Voltage	1000 VACpeak/VDC	8 Operating Temperature	-20 ⁻ +70 [°] C
3 Max Switch Current	1.0 A	9 Soldering Temperature	5 sec. max 260 [°] C
4 Max Carrying Current	2.5 A		
5 Min Breakdown Voltage	4K VDC		
6 Max Contact Resistance	150 mohm		

Version: 01	Designed by		TITLE Minsensor Reed Relay	
	Checked by			
	Approved by		P/N HVR1A05	Scale: 2.5:1
	Date	5th, Oct, 2010		Page: 1/1