


Precision Vacuum Pressure Regulator 70 l/min

R260

Description	Diaphragm vacuum regulator ensuring high precision in both vacuum and positive pressure range.		
Media	compressed air or non-corrosive gases		
Supply pressure	max. 17 bar		
Accuracy	response sensitivity: < 2 mbar		
Adjustment	by handwheel with locknut		
Air consumption	max. 2.8 l/min in positive pressure range		
Flow rate	70 l/min*1 in vacuum range,	900 l/min*2 in positive pressure range	
Gauge port	G $\frac{1}{4}$ on both sides of the body, screw plugs supplied		
Mounting position	any		
Temperature range	-40 °C to 90 °C / -40 °F to 194 °F		
Material	Body: aluminium die-cast	Inner valve: stainless steel and brass	
	Elastomer: NBR/Buna-N		

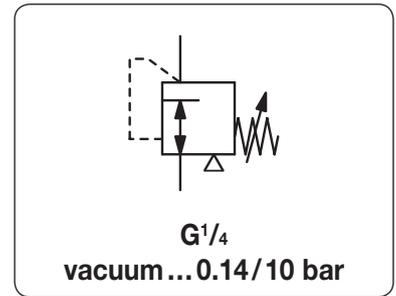

Dimensions				K _v	Flow rate		Connection	Vacuum	Order
A	B	C	D	value	m ³ /h*1	l/min*1	thread	range	number
mm	mm	mm	mm	m ³ /h			G	bar	

Vacuum regulator								supply pressure max. 17 bar, with constant bleed	R260
76	184	20	65	0.78	4	70/900*2	G $\frac{1}{4}$	-1 ... +0.14	R260-020
								-1 ... +0.7	R260-02A
								-1 ... +2.0	R260-02B
								-1 ... +7.0	R260-02C
								-1 ... +10	R260-02D




R260

Special options, add the appropriate letter


NPT	connection thread	R260-0 . . N
tamper-proof cap	made of aluminium, adjustment by screwdriver, total height 189 mm	R260-0 . . T

Accessories, enclosed


pressure gauge	Ø 63 mm, -1...0 bar, G $\frac{1}{4}$	MA6302-00
mounting bracket	made of steel	BW00-33

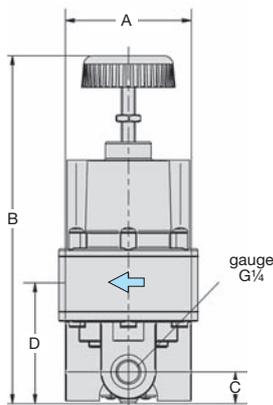


R260




BW00-33

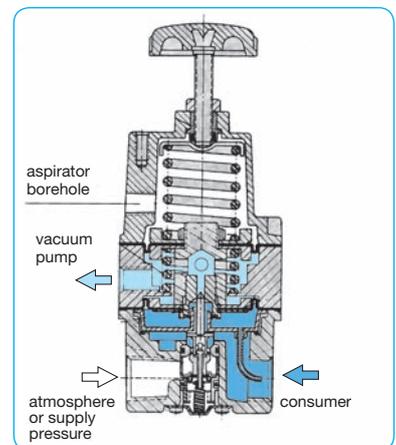

cross section
connection for downstream regulation

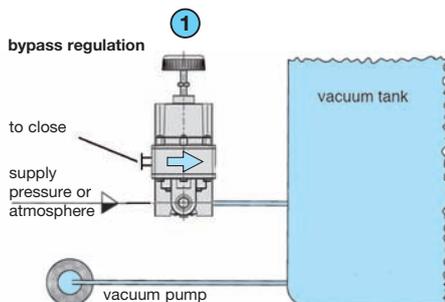

1 Bypass regulation
Upstream installation is preferred when rapid exhaust of a tank or system is required. That way the vacuum pump acts directly upon the tank and is not being throttled by the vacuum regulator.

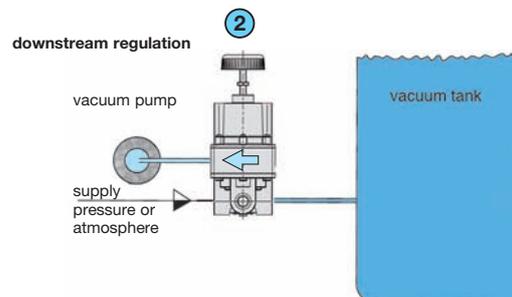

2 Downstream regulation
The regulator is located between the pump and the tank. The vacuum pump is energy-saving and it is easy to fill the tank to its optimal level with pressure or vacuum.

Note
A strainer is provided on the atmospheric or pressure side, but an additional filter is recommended.

*1 for compressed air at -0.98 bar supply pressure and 0 bar outlet pressure
*2 for compressed air at 7 bar supply pressure and 1.4 bar outlet pressure



Order example:
R260-020

China website: www.duray-control.cn