

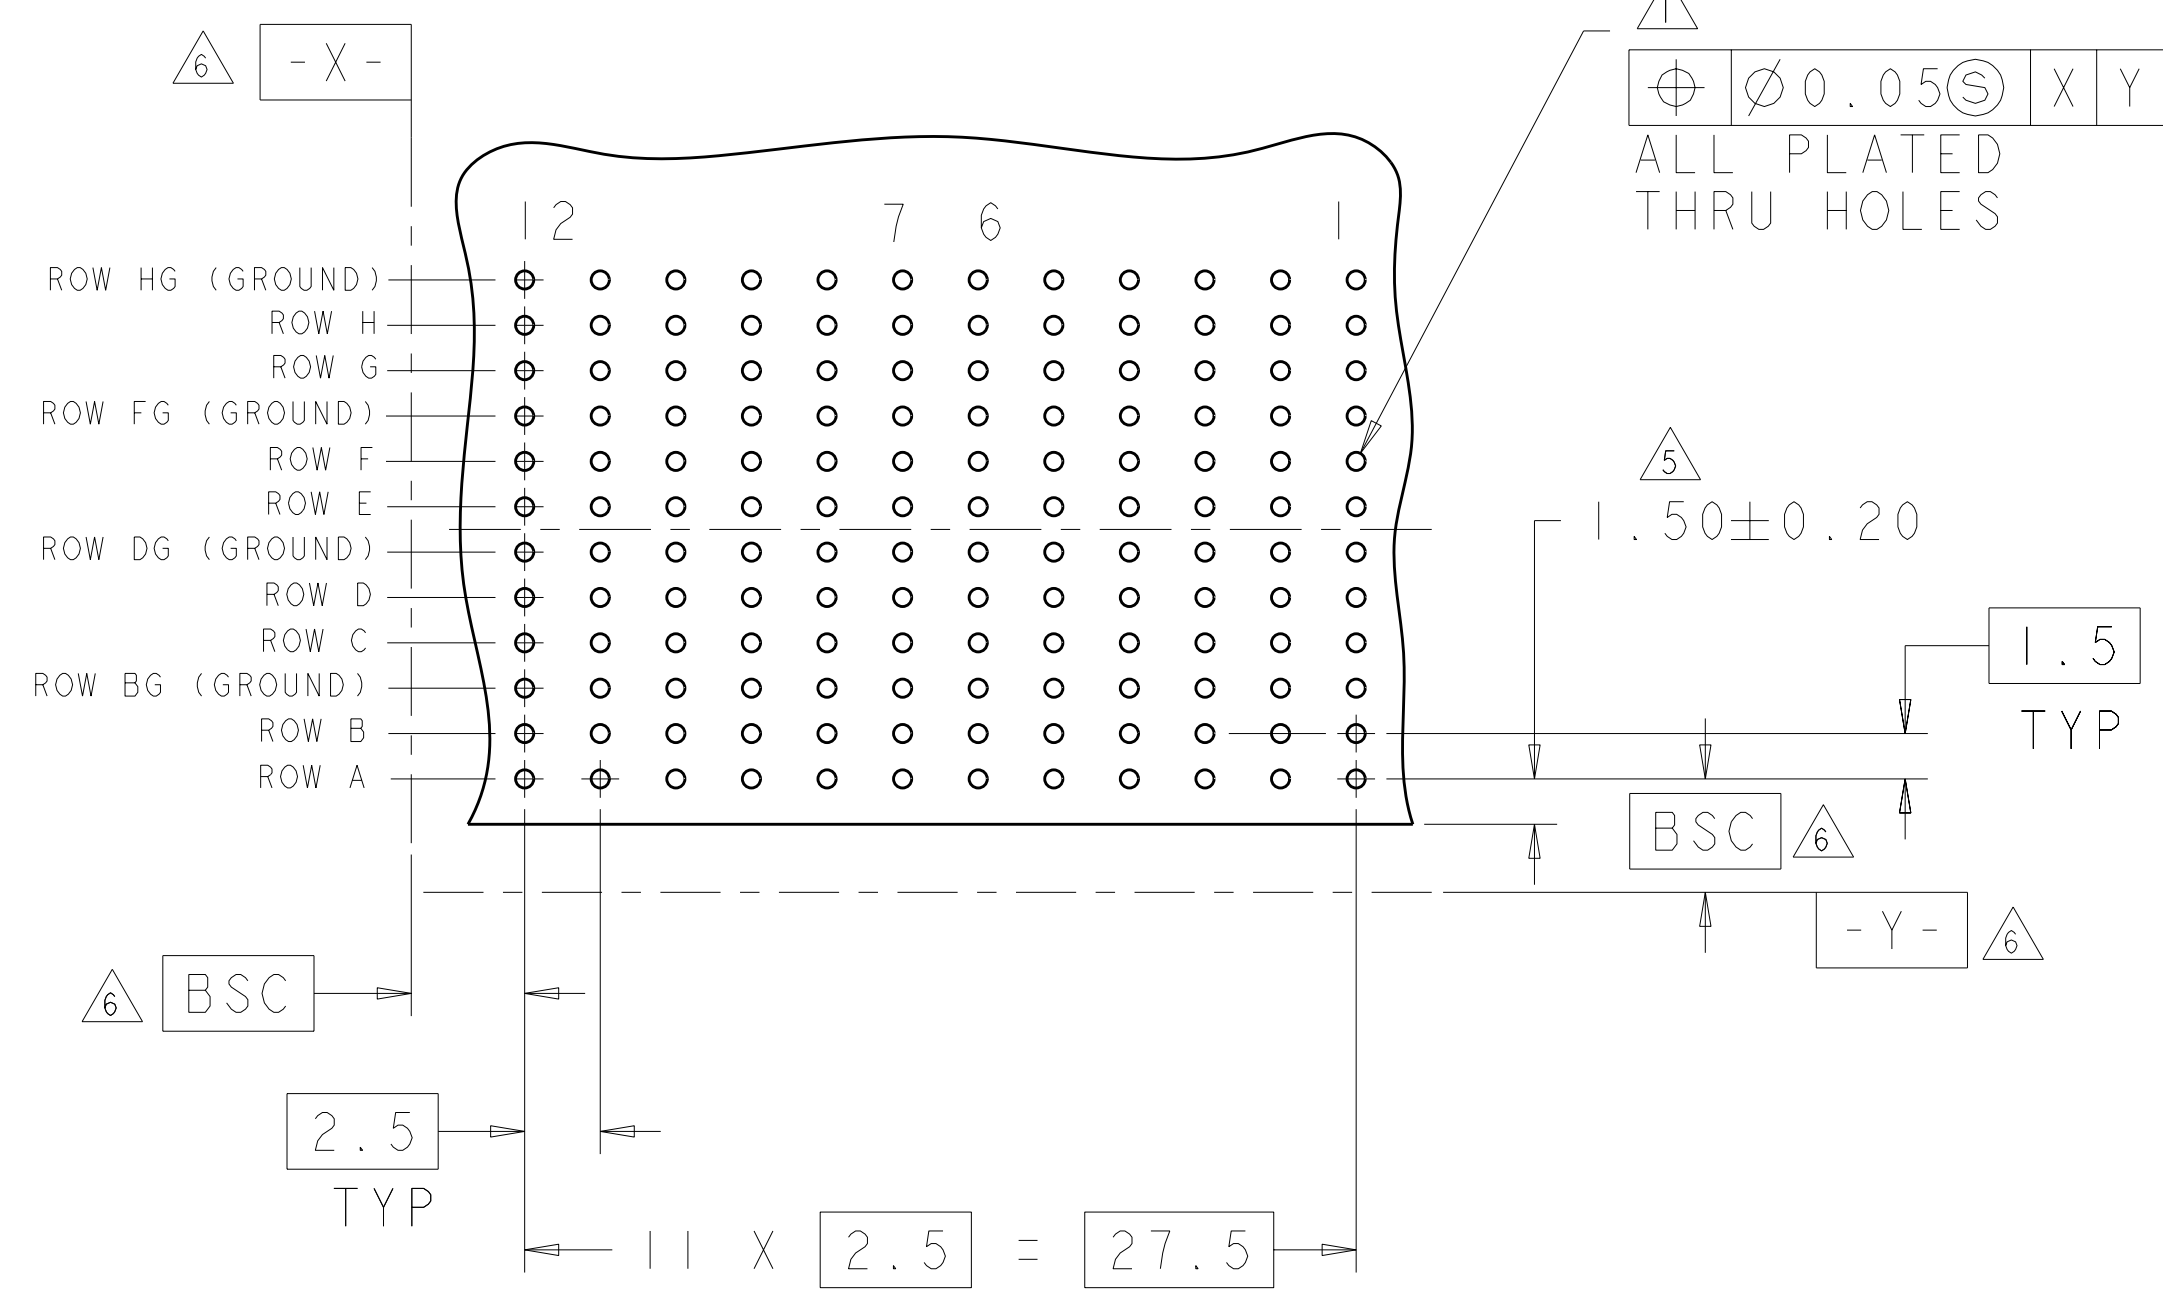
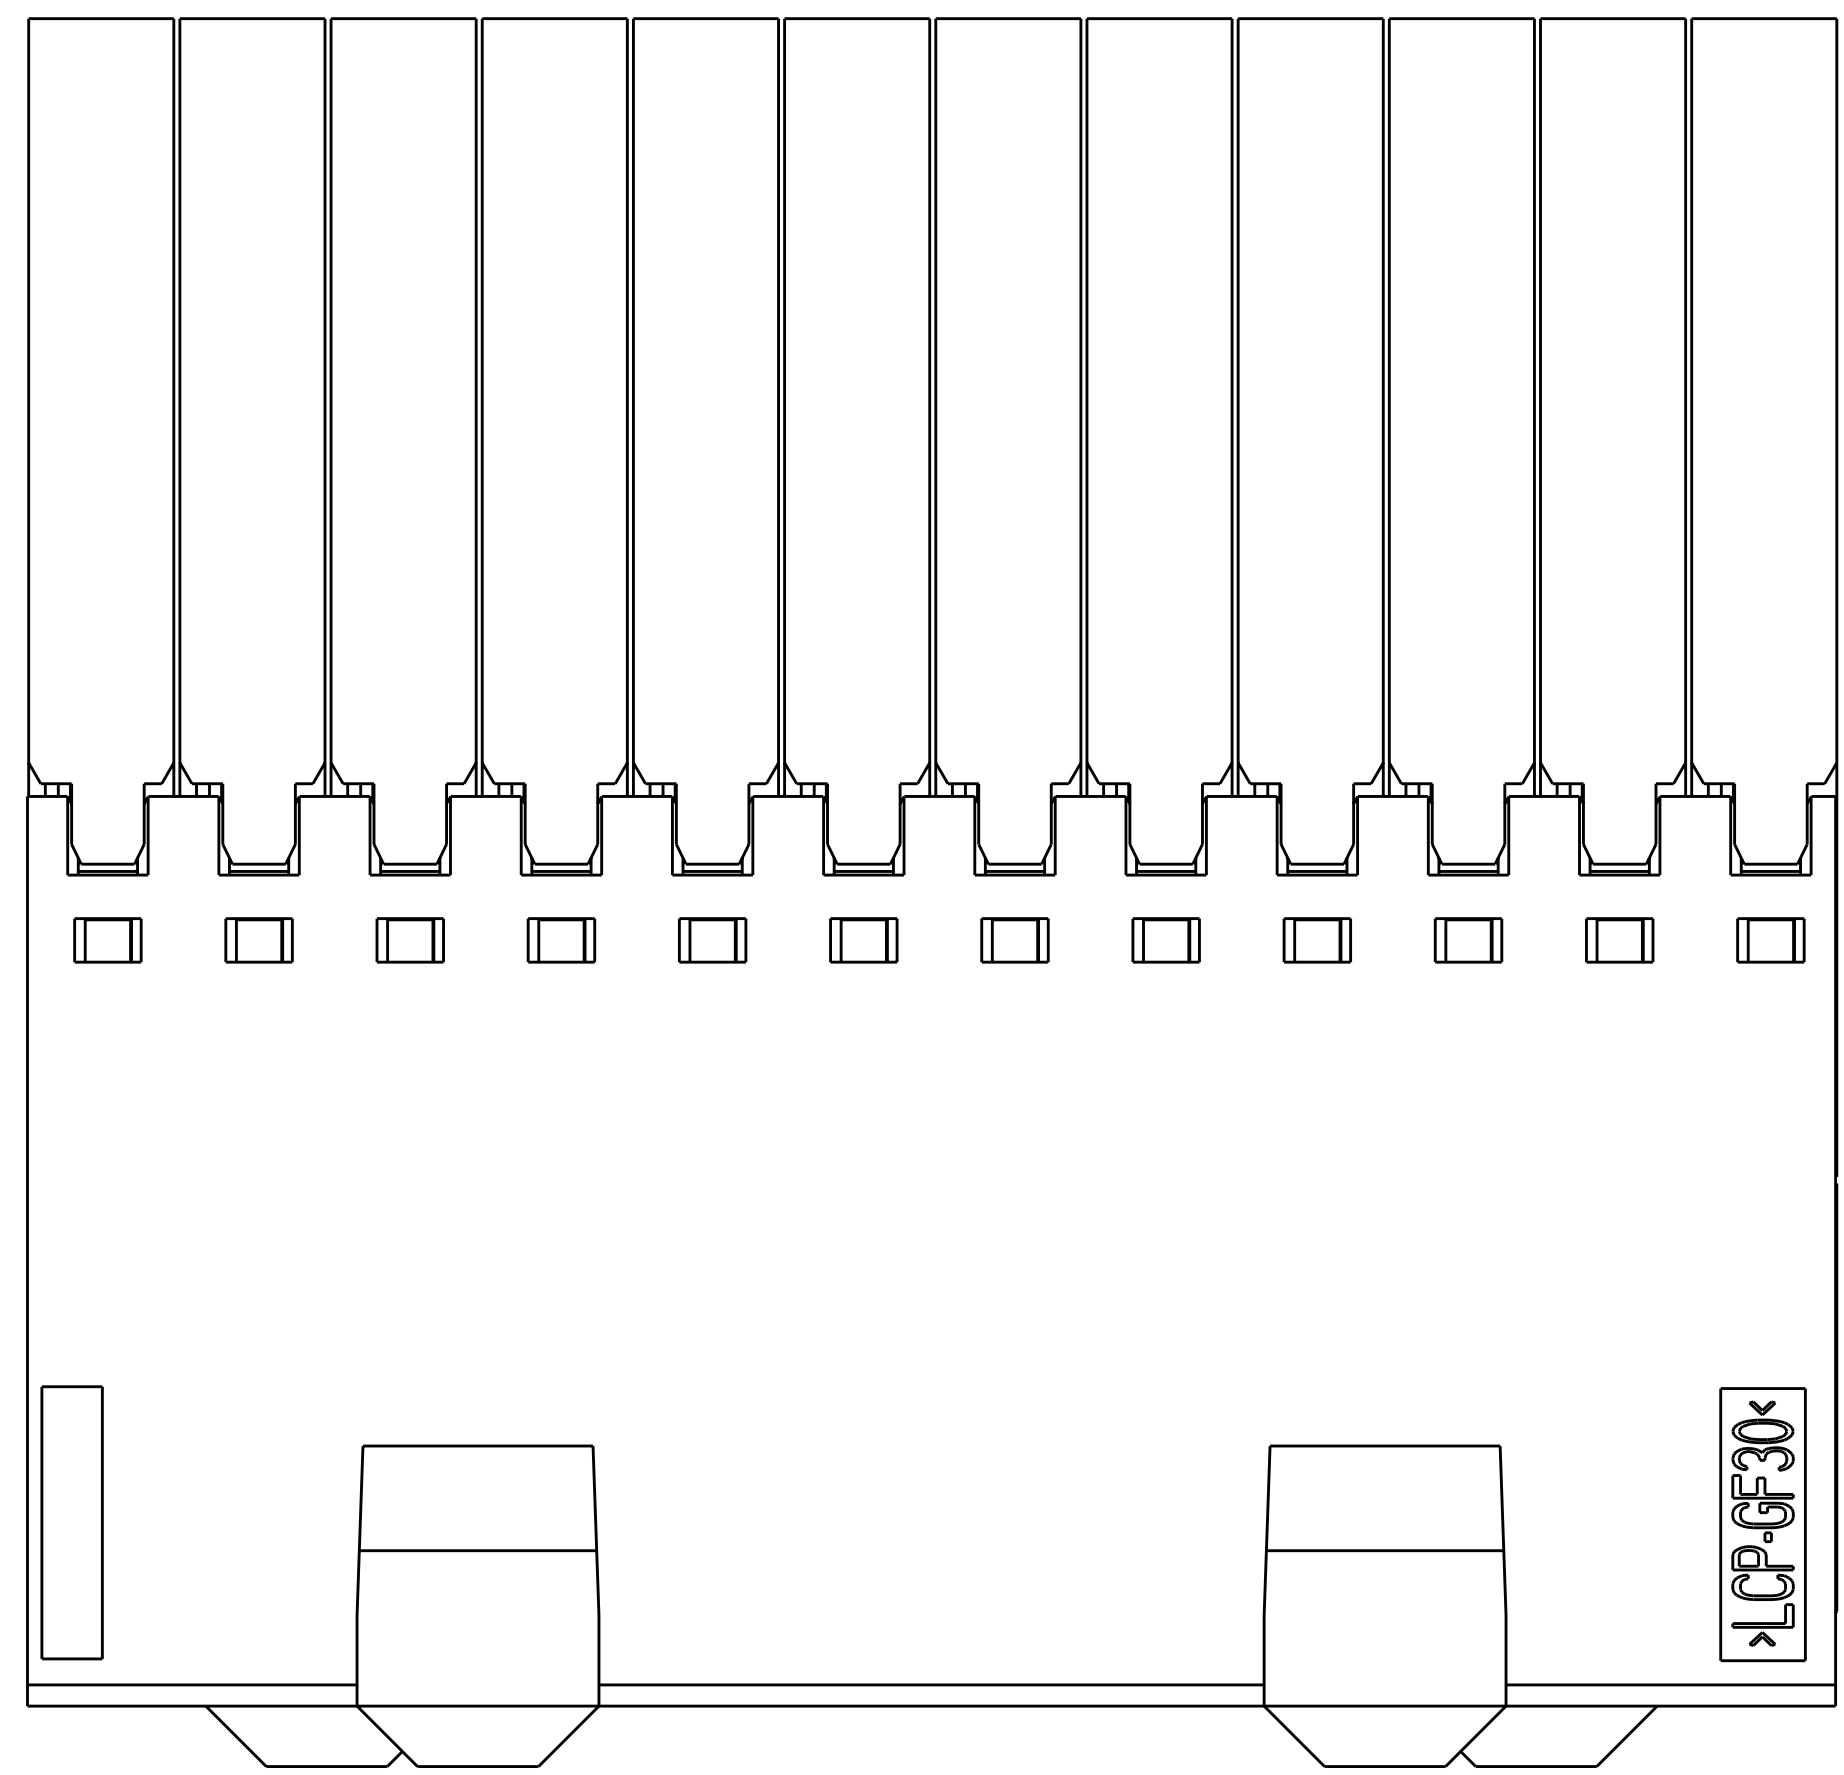


LOC		DIST		REVISIONS			
AD	00	P	LT#	DESCRIPTION	DATE	DWN	APVD
		B		REV PER ECO-007577	13APR2011	RKC	JE

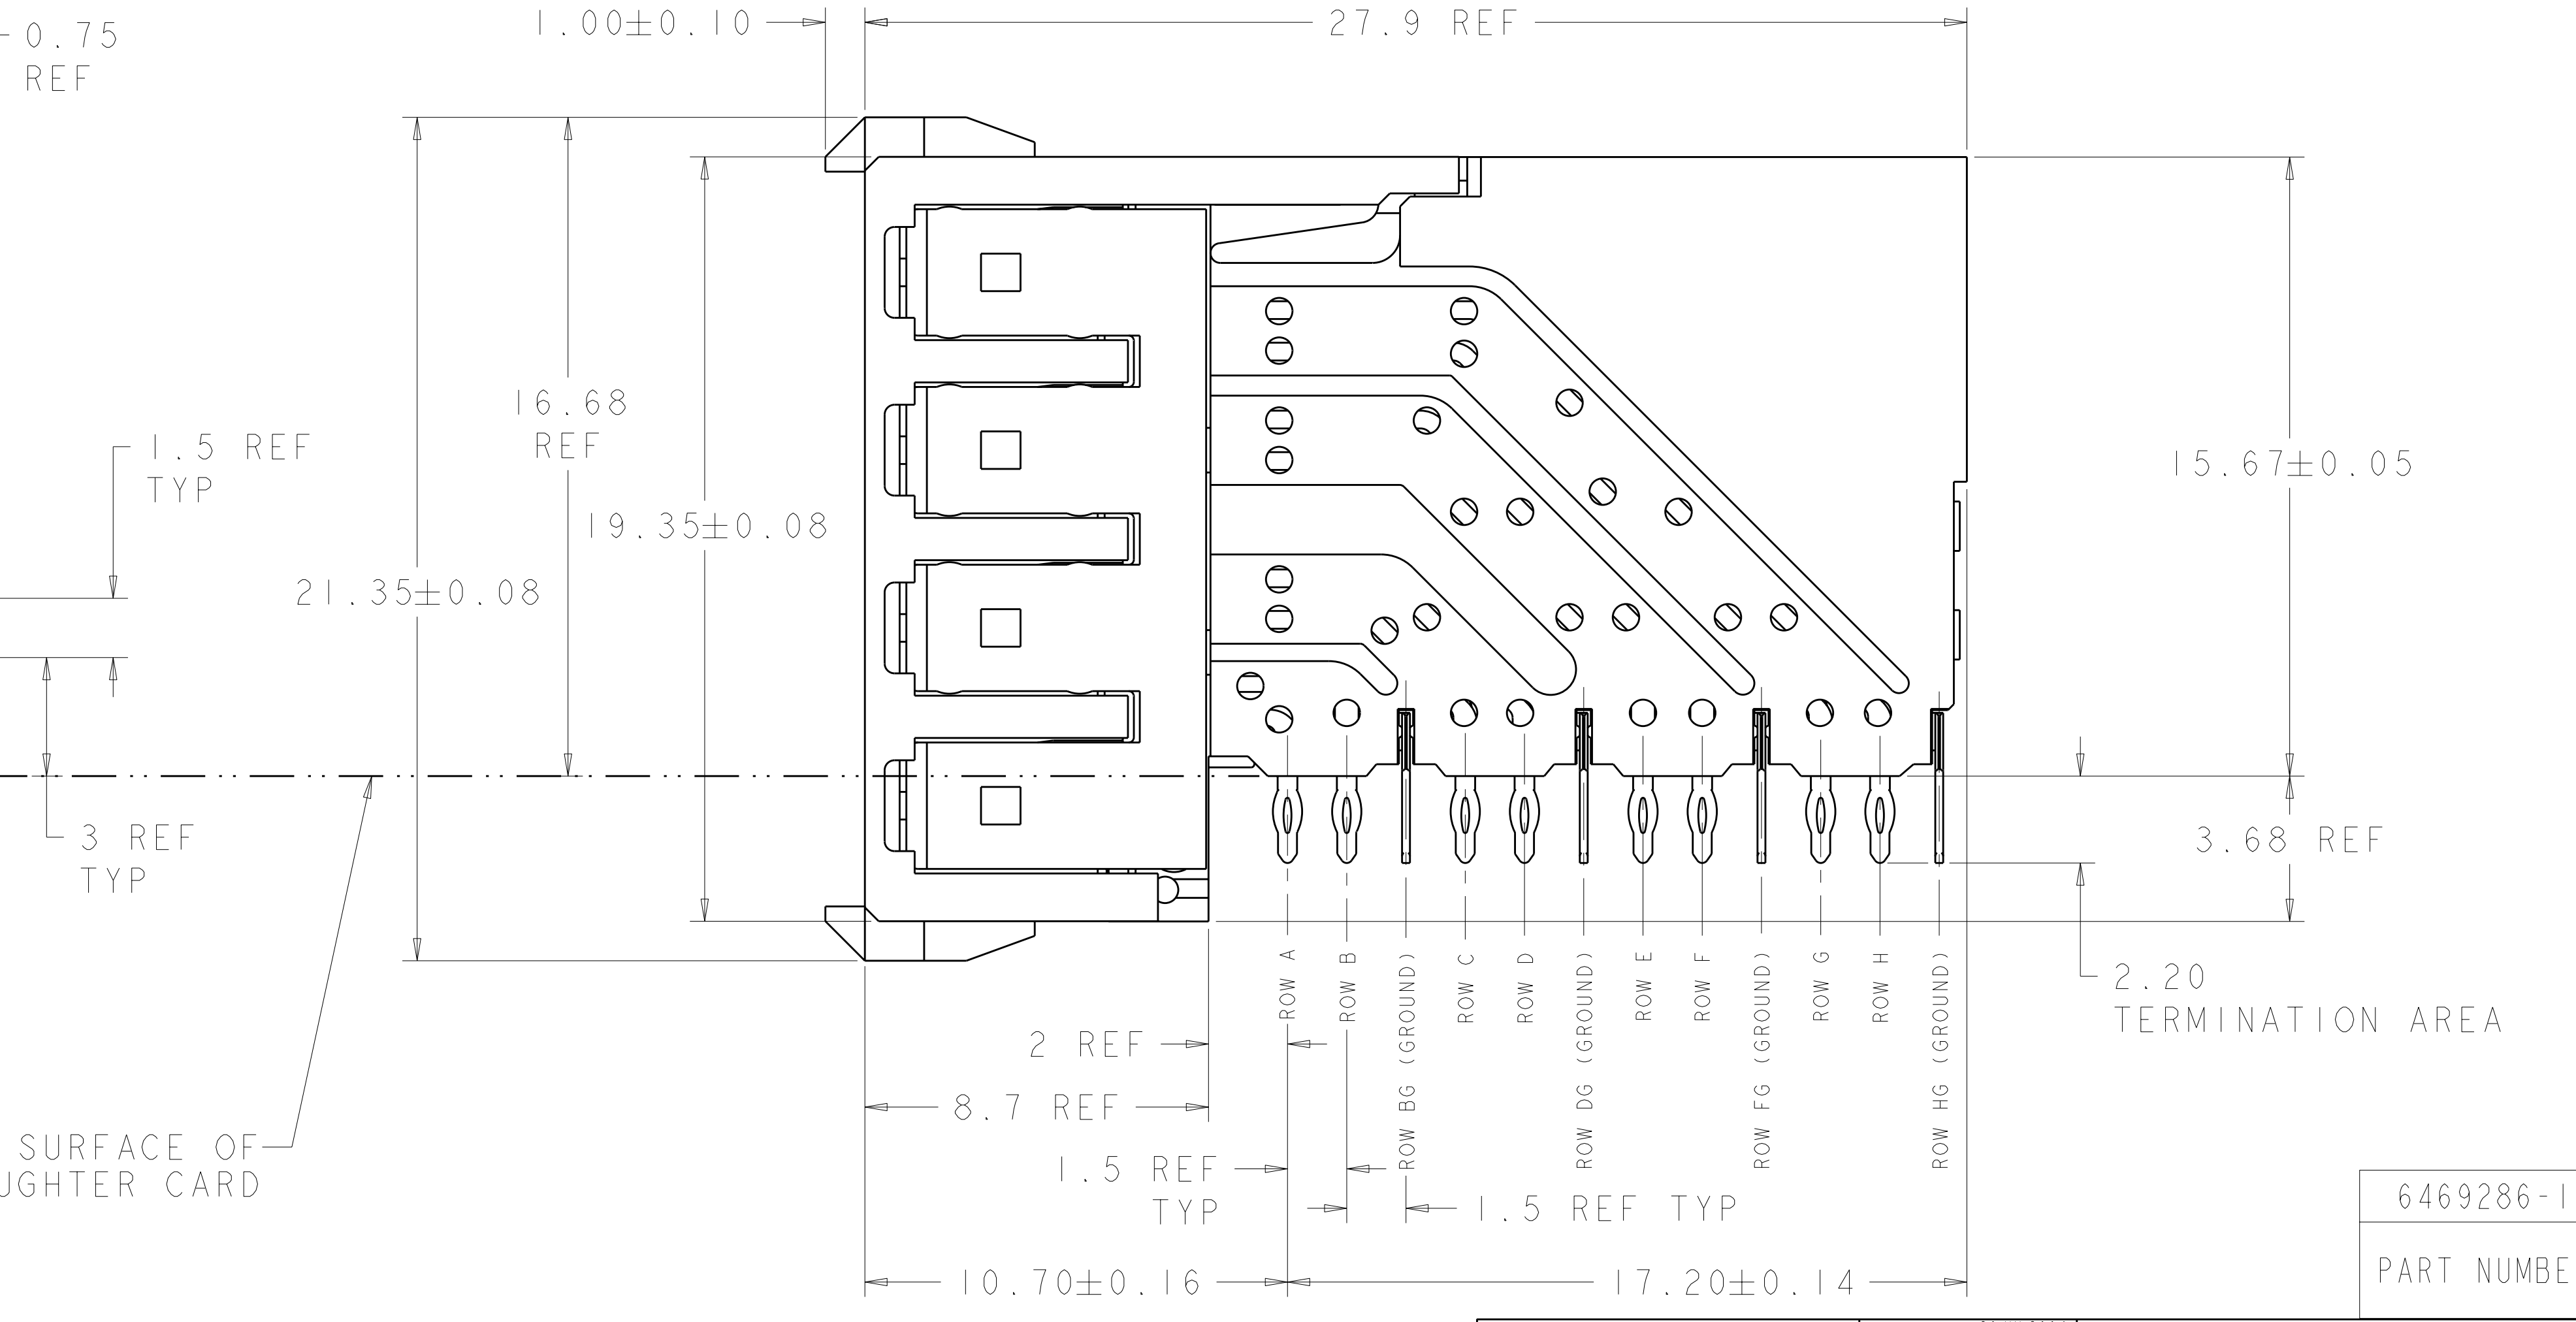


- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
- 3 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN MATTE TIN OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT, DAUGHTER BOARD, COMPONENT SIDE SHOWN
 SCALE 4:1

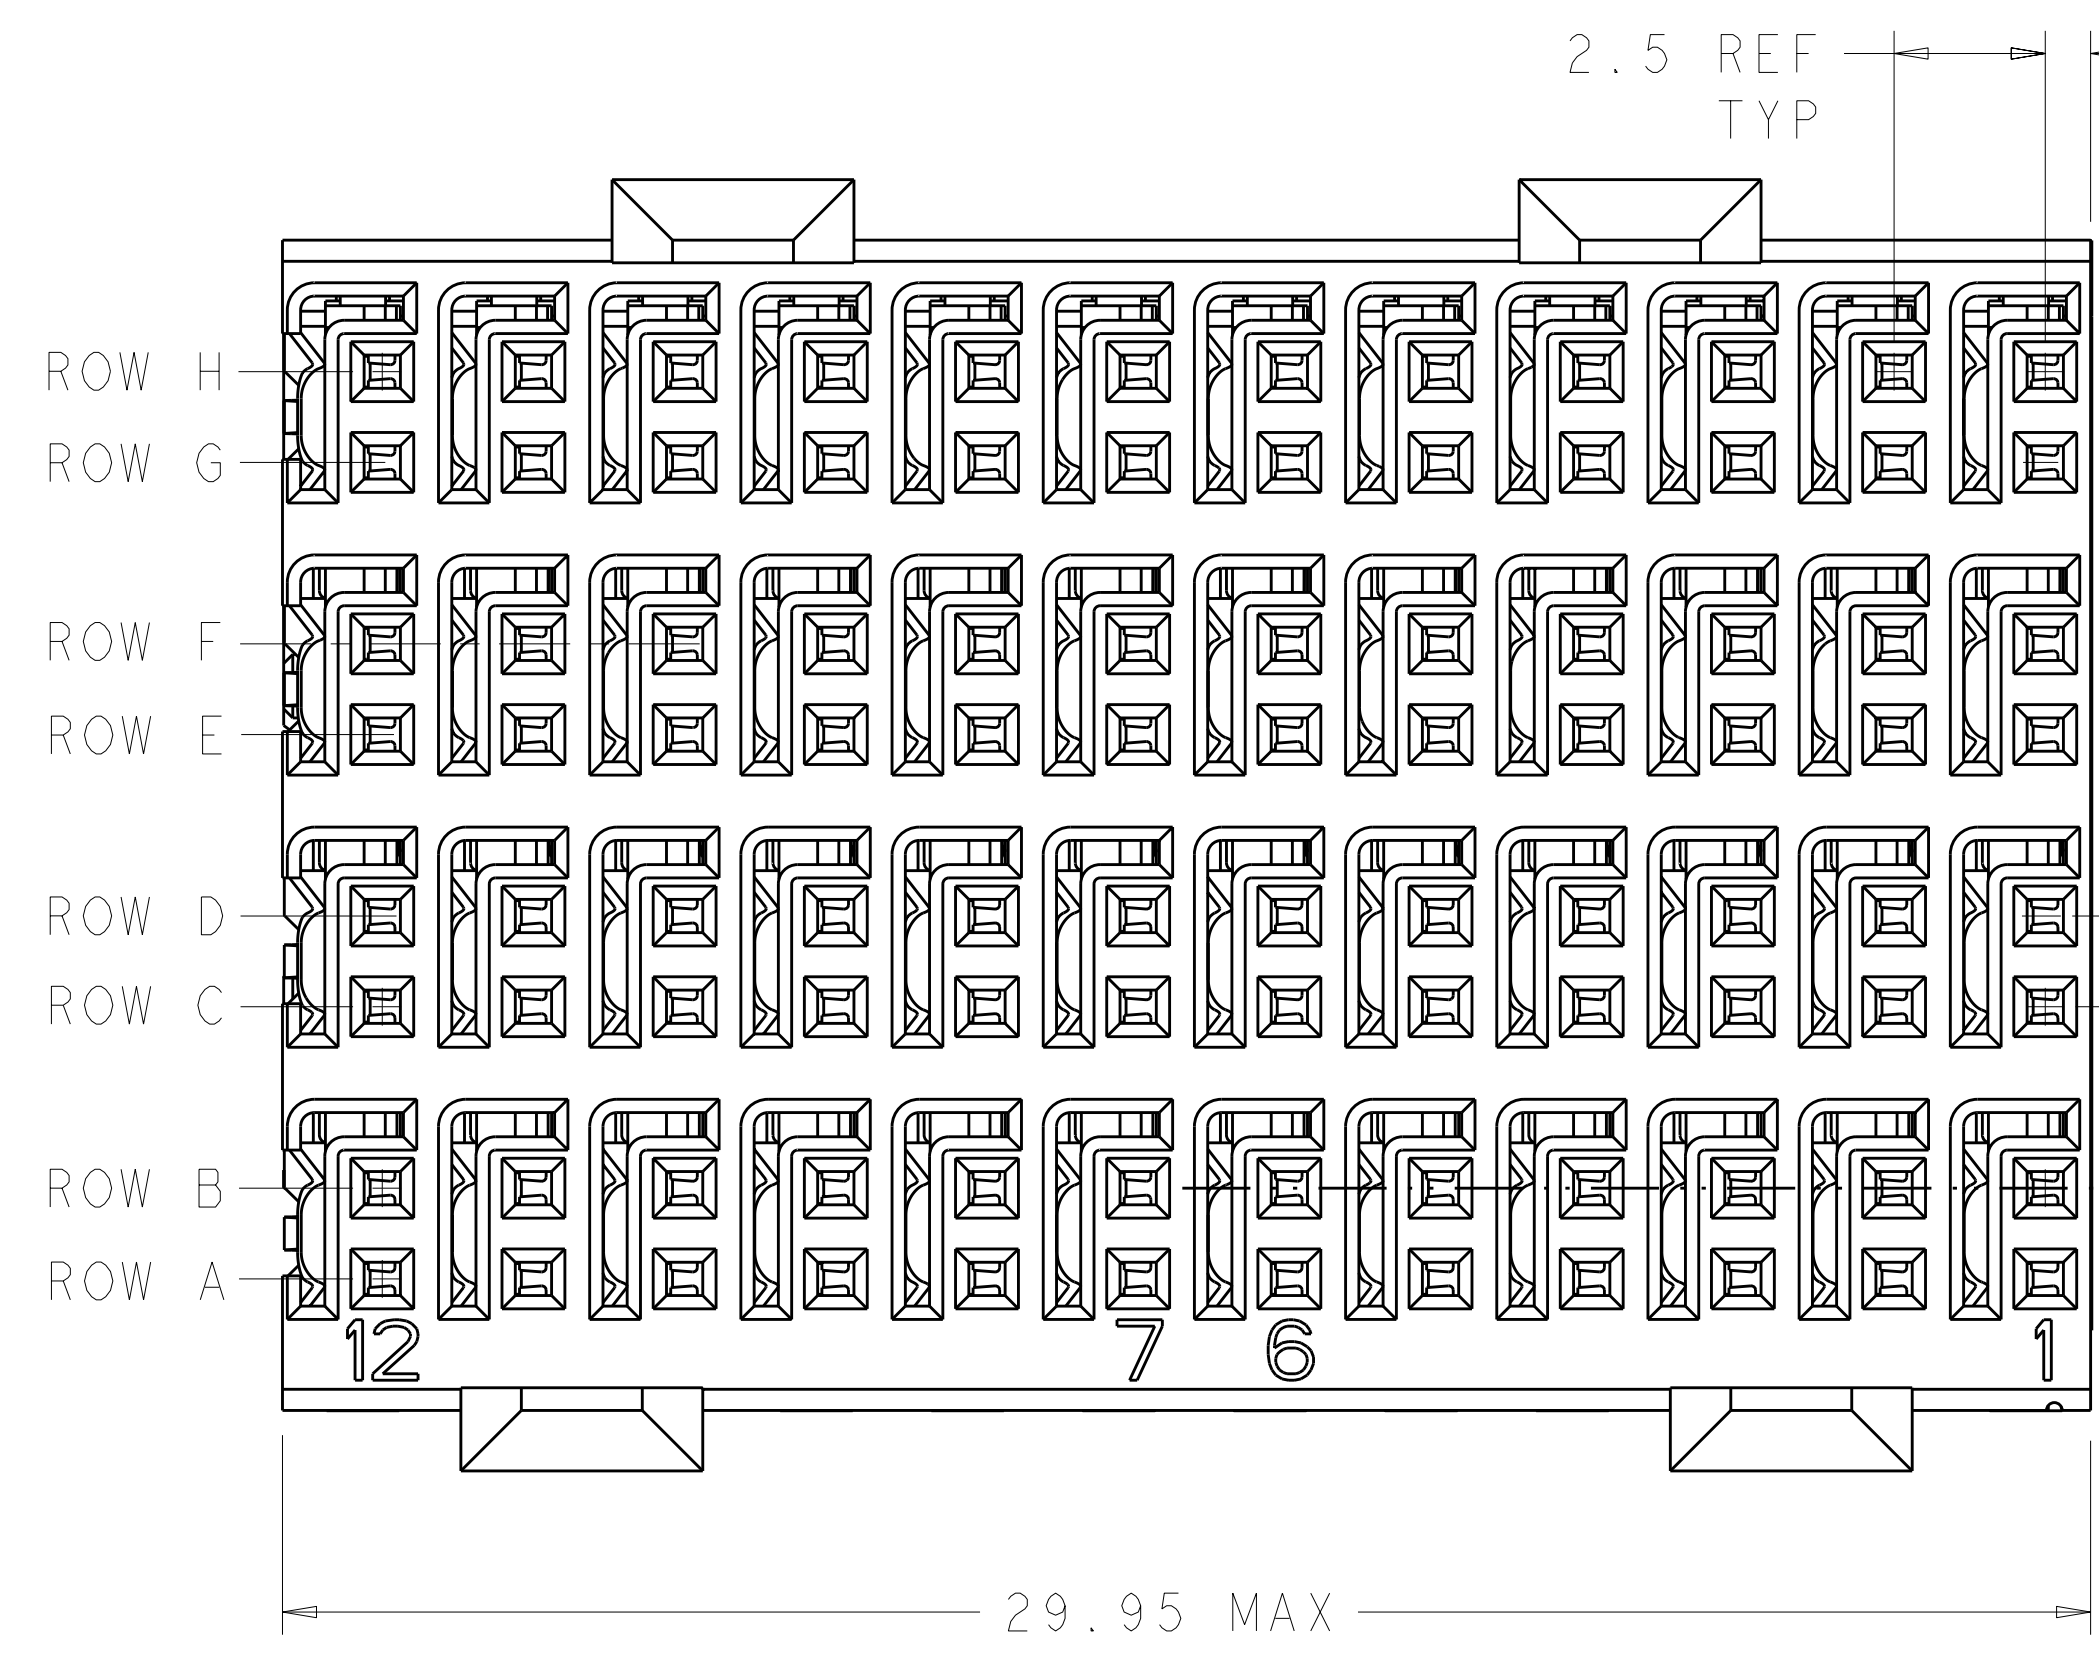

TOP SURFACE OF DAUGHTER CARD

6469286-1
 PART NUMBER

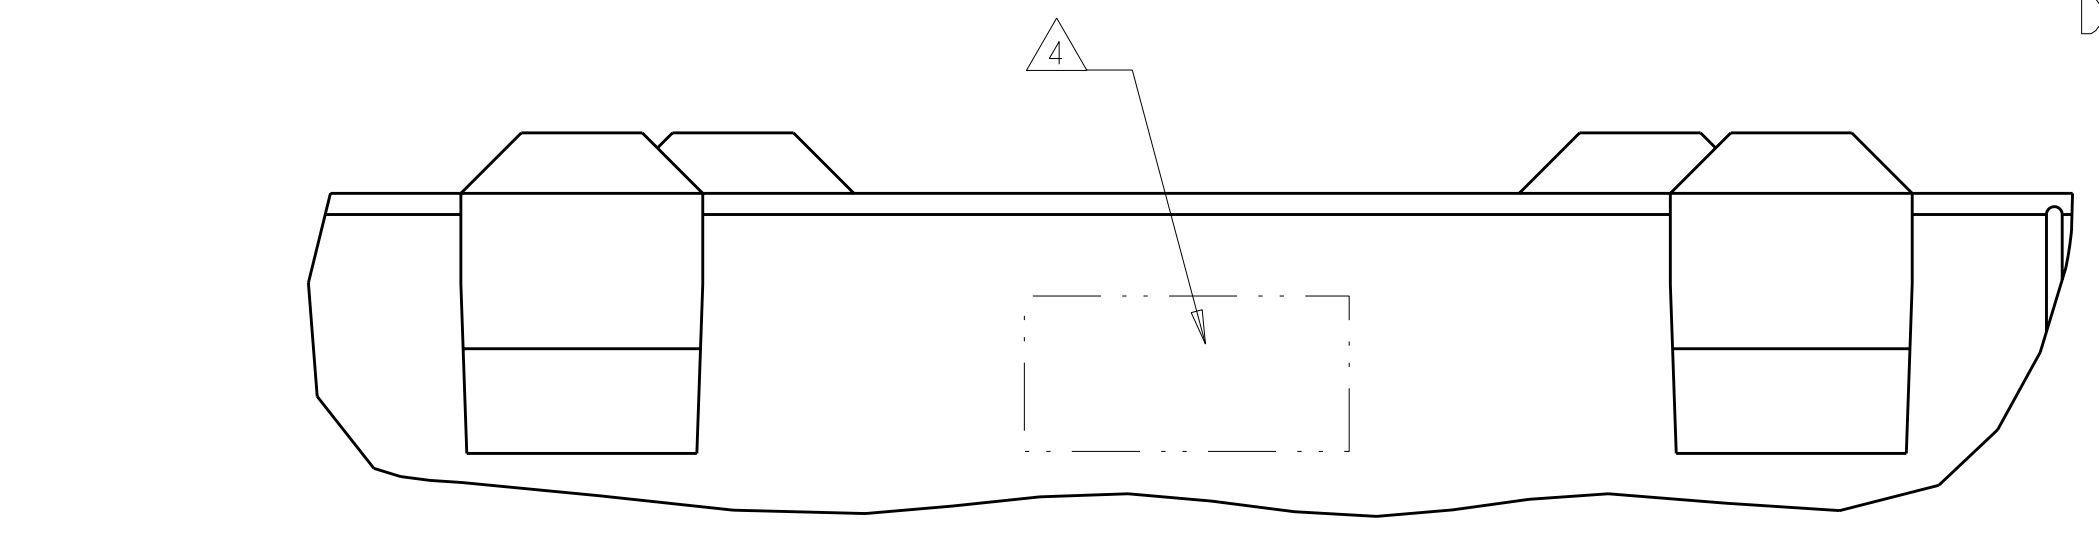

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: S. J. MAGARO 26 JUL 2004	STE TE Connectivity	
DIMENSIONS: mm		CHK: R. A. PATTERSON 26 JUL 2004	RECEPTACLE ASSEMBLY, 4 PAIR, 30mm, HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: R. PATTERSON 17 MAY 2007	SIZE: A100779 C=6469286	
MATERIAL: 9 PLC ±		PRODUCT SPEC:	RESTRICTED TO	
FINISH: 3		APPLICATION SPEC:	SCALE: 8:1 SHEET 1 OF 1 REV B	
MATERIAL: 2		WEIGHT:	CUSTOMER DRAWING	