

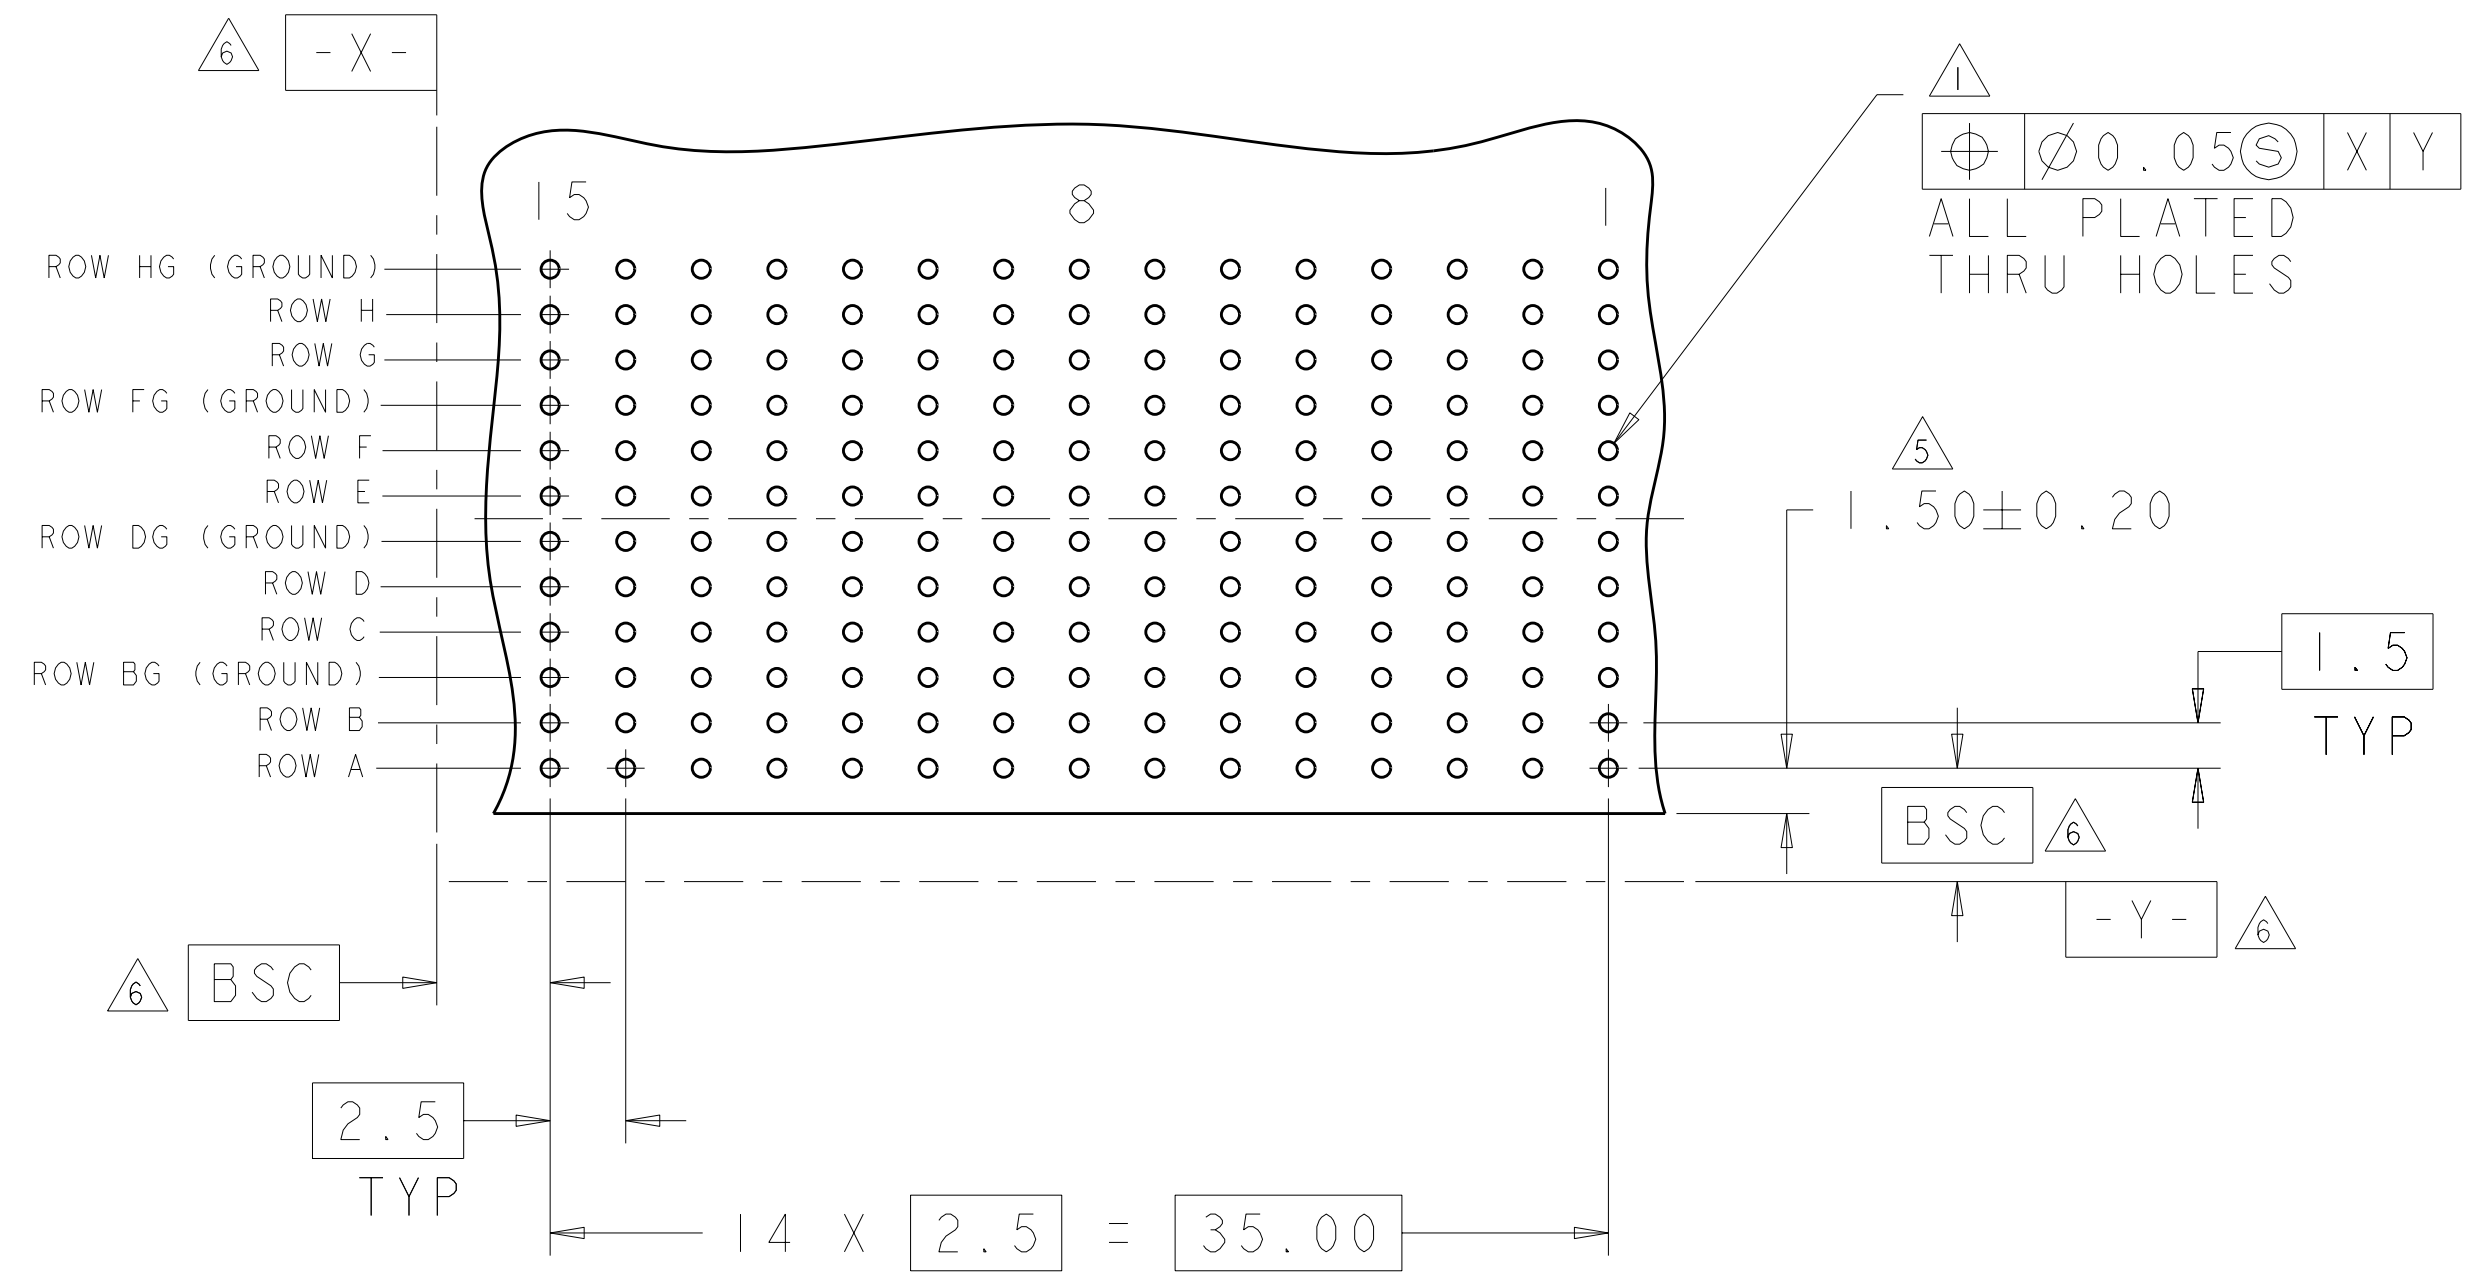
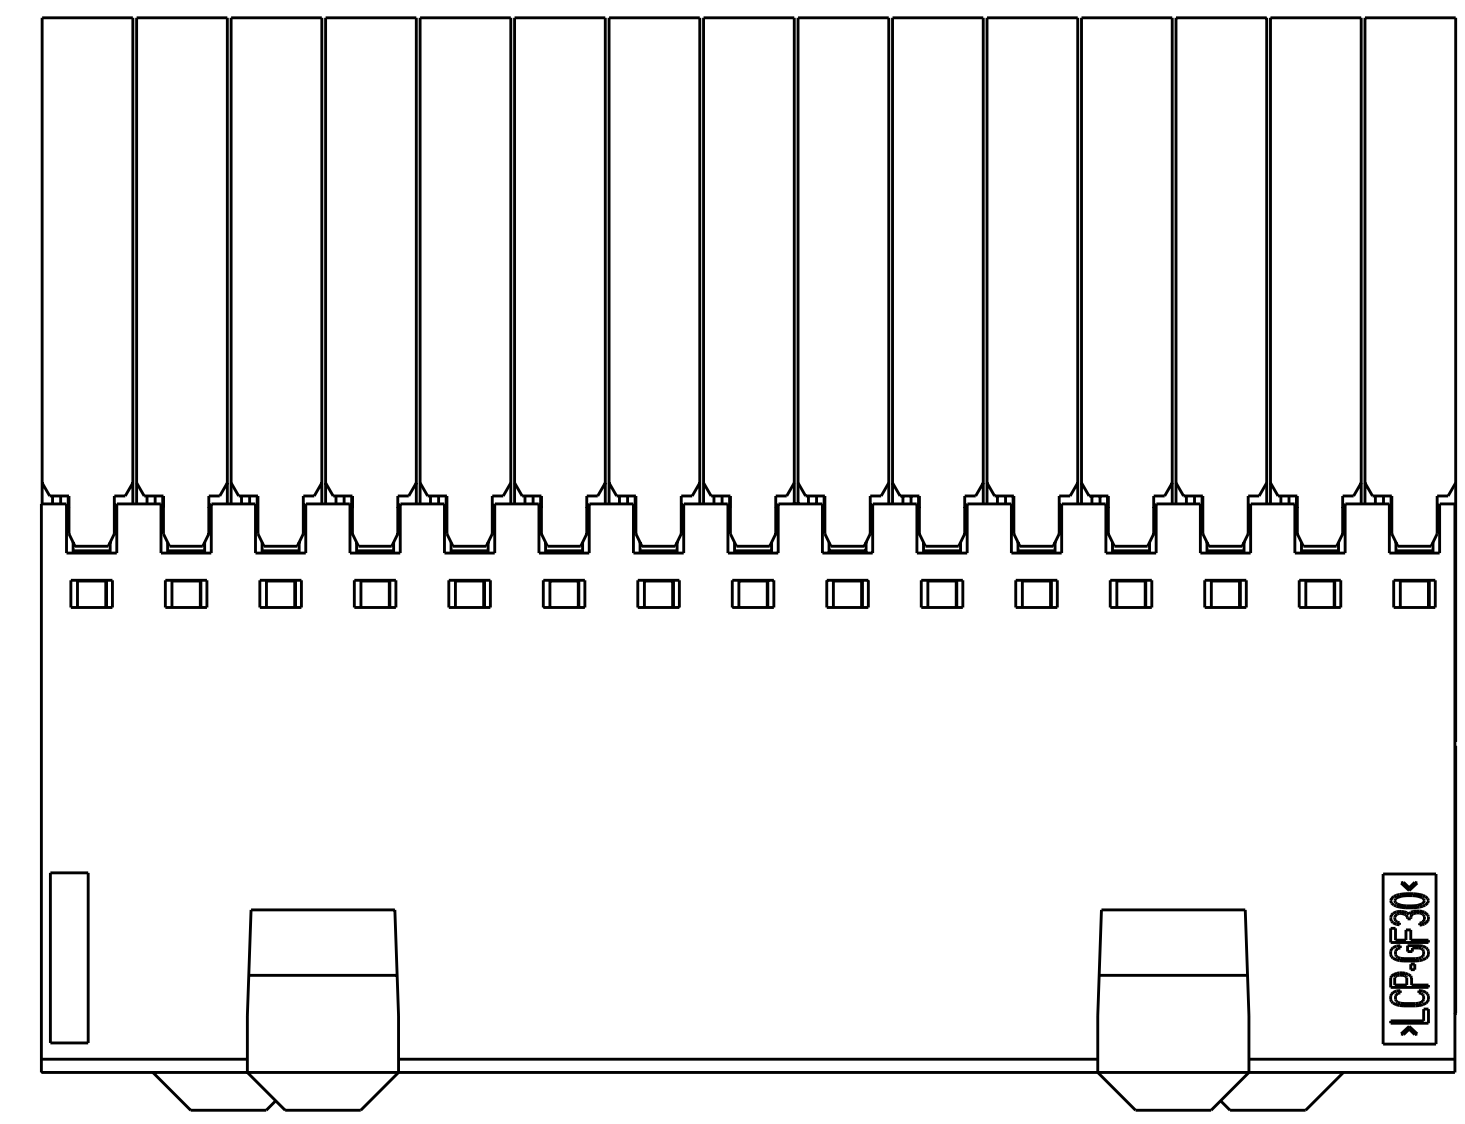


LOC		DIST		REVISIONS			
AD	00	REV	DATE	BY	CHK	APPD	
B		REV PER ECO-11-007577	13APR2011	RKC	JE		

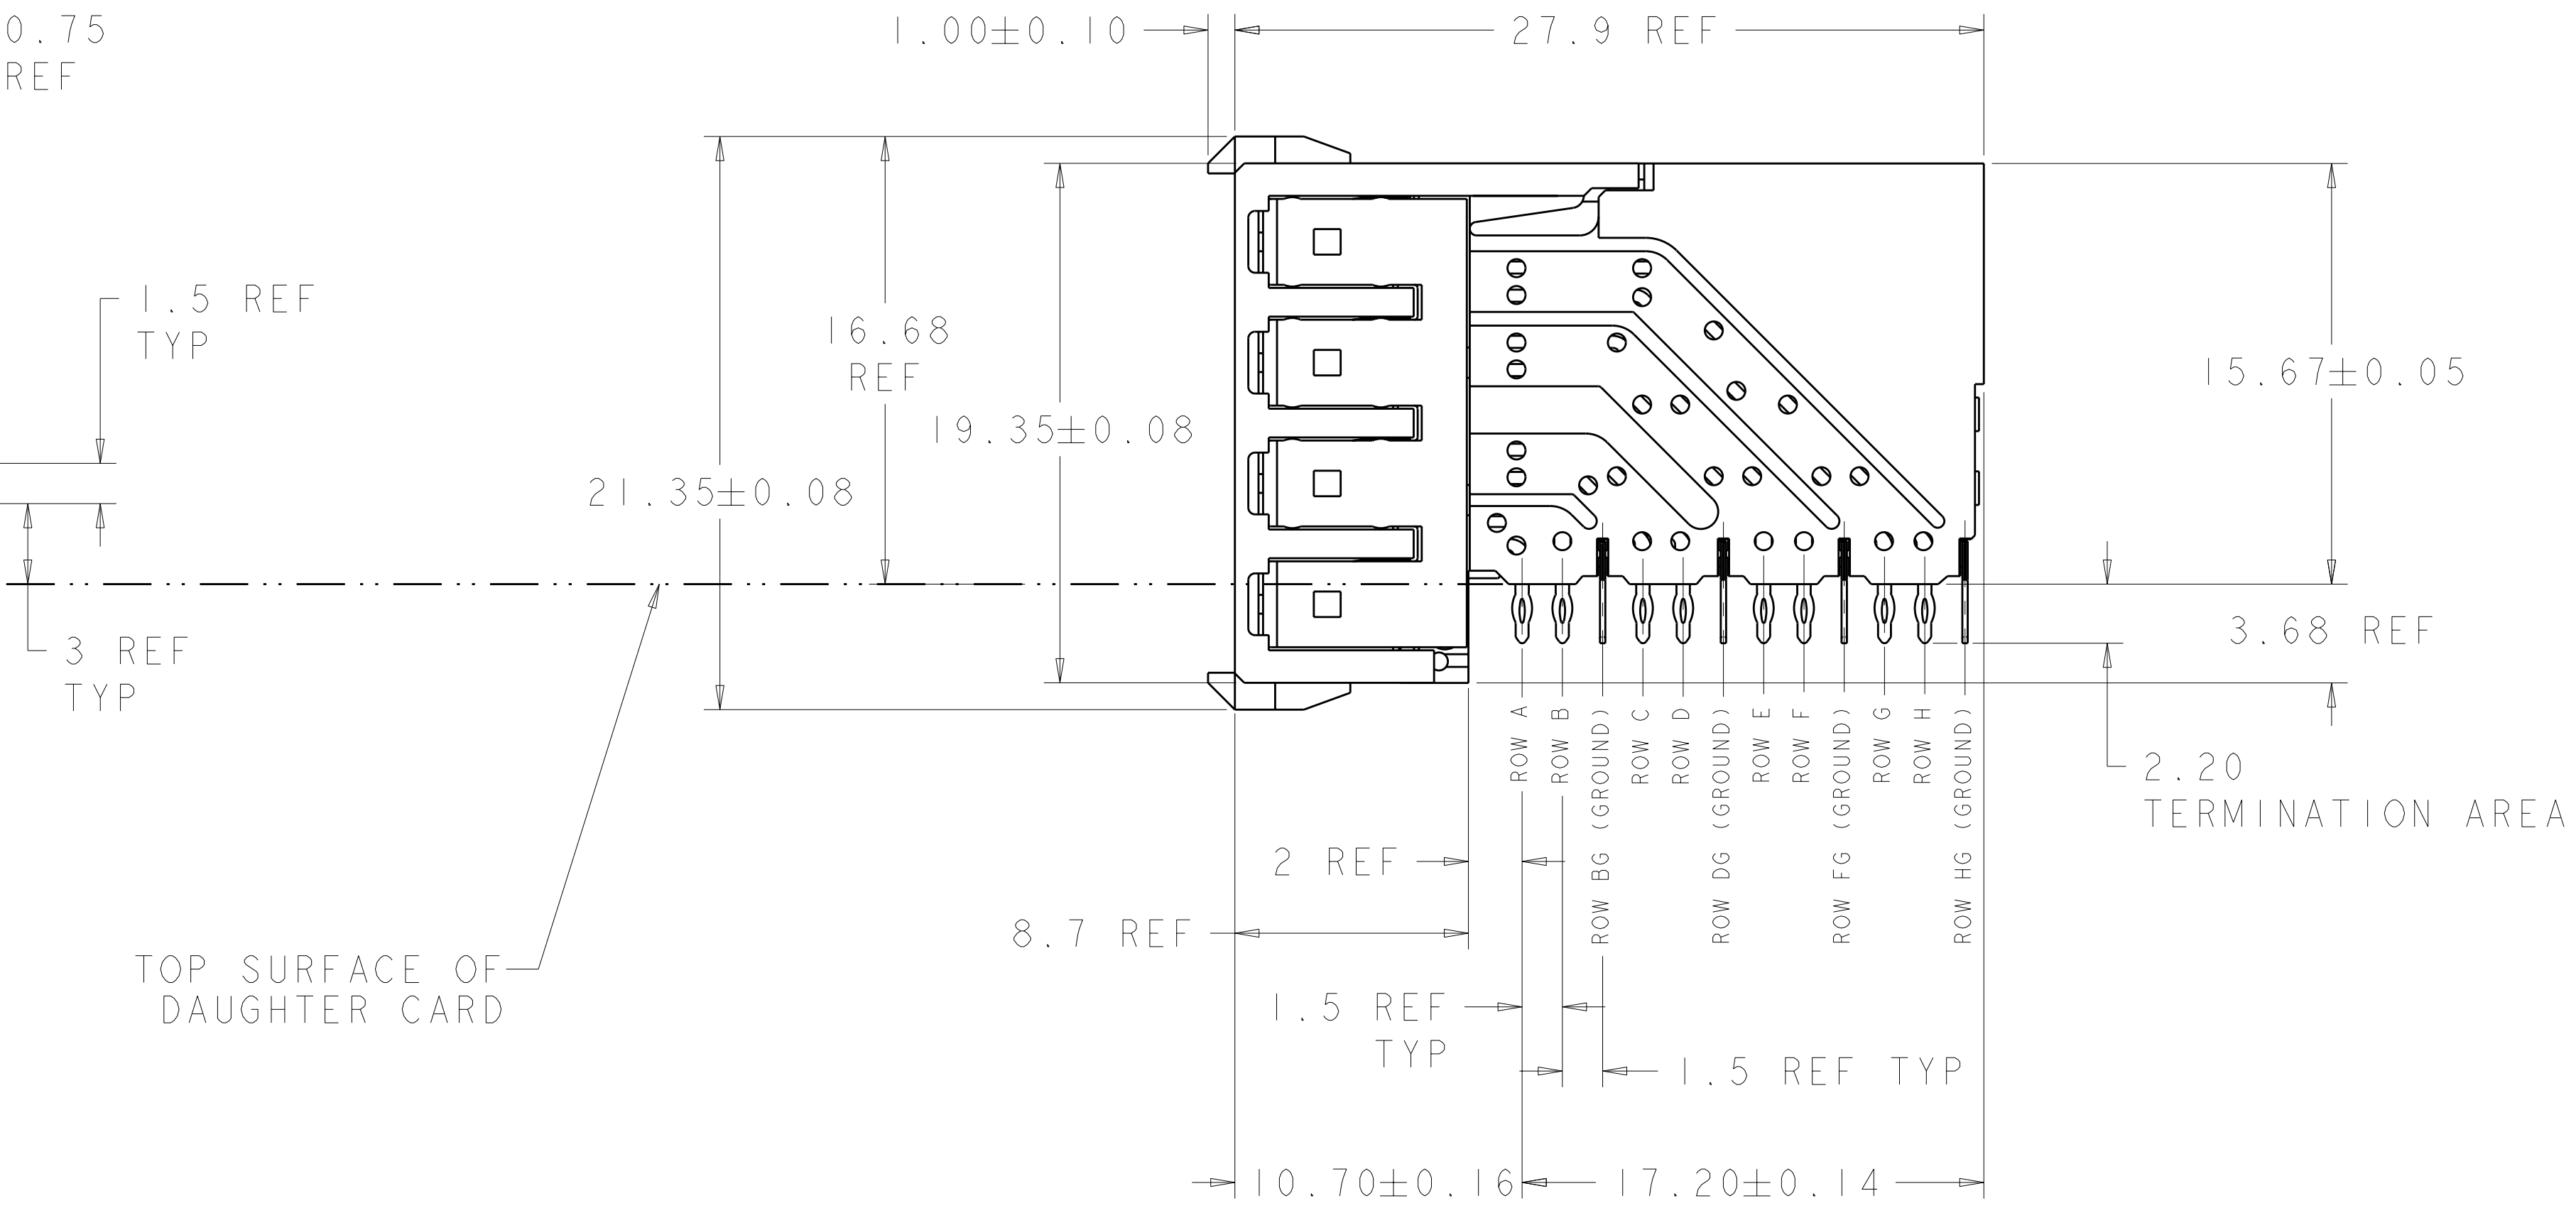


- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:  
SHIELD - PHOSPHOR BRONZE  
CONTACT - COPPER-NICKEL-SILICON  
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
- 3 FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5 µm MIN MATTE TIN OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT,  
DAUGHTER BOARD,  
COMPONENT SIDE SHOWN  
SCALE 4:1

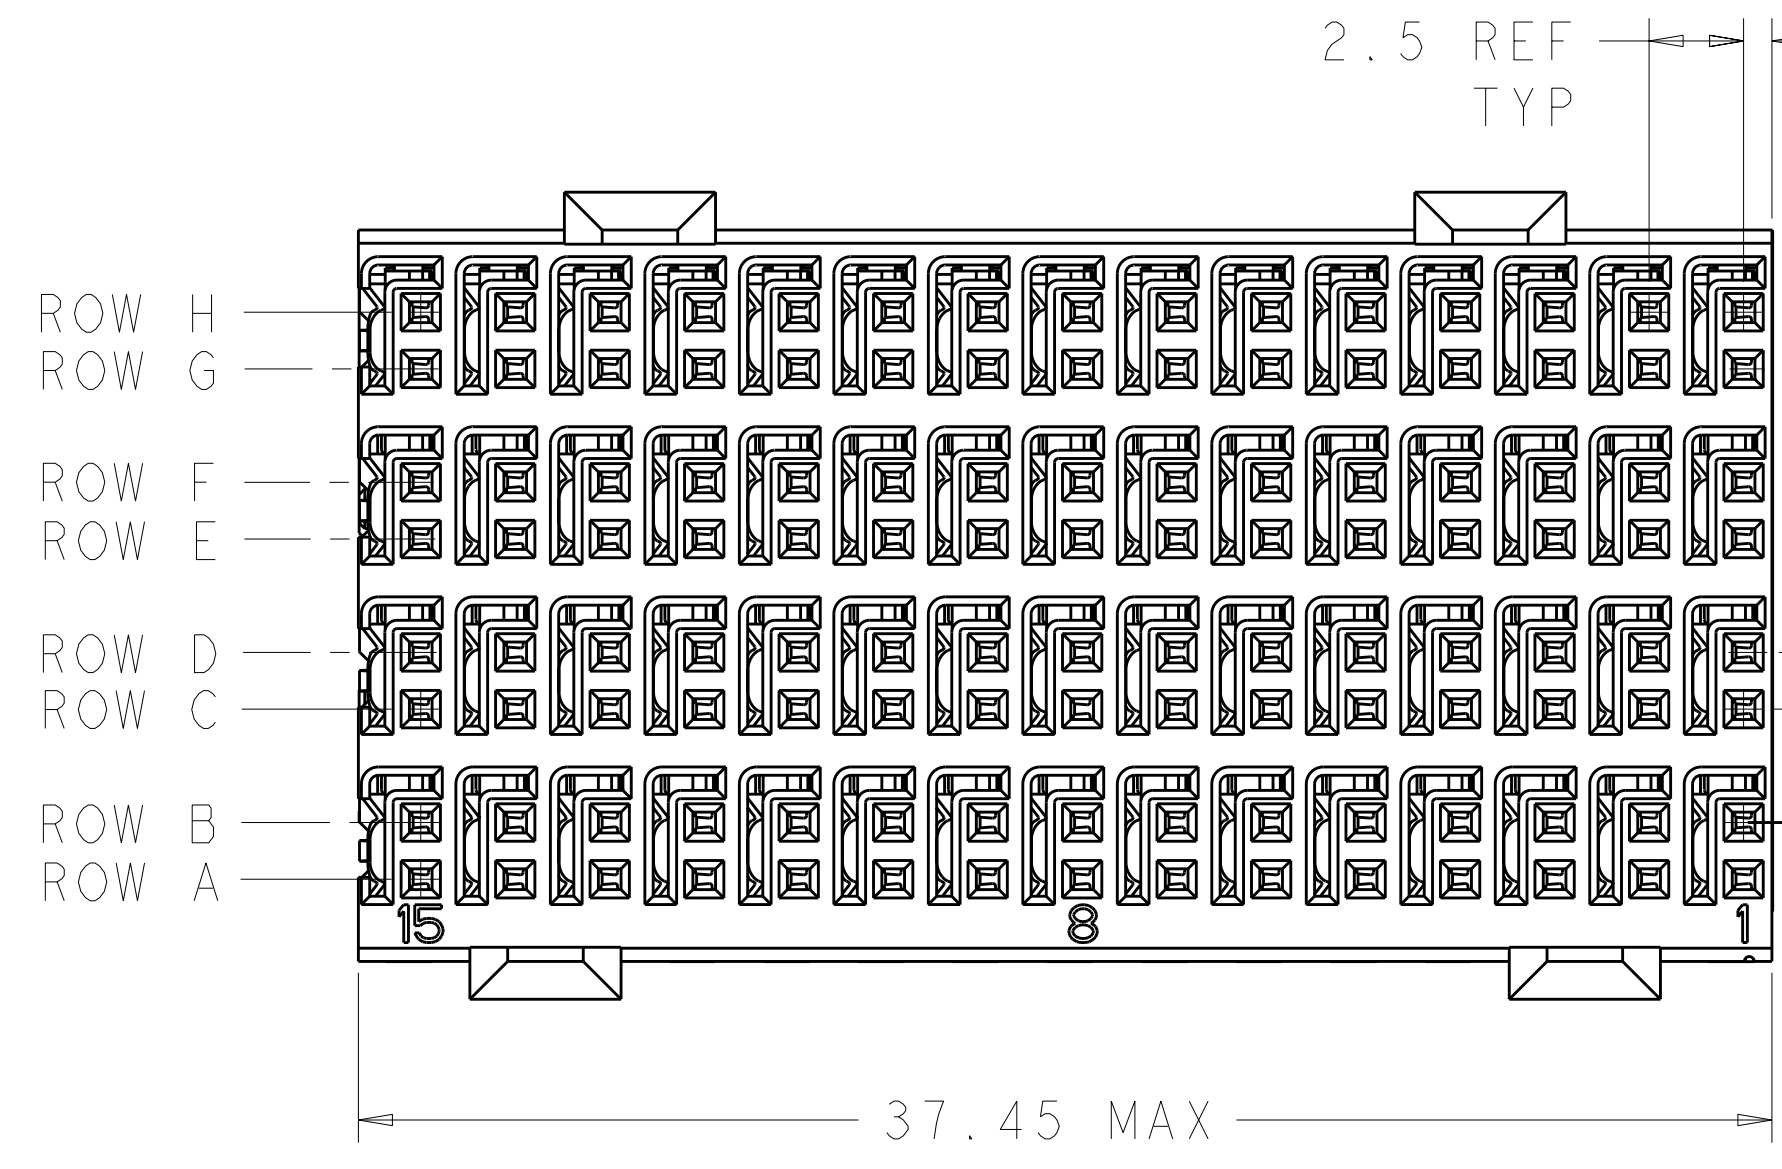

TOP SURFACE OF DAUGHTER CARD

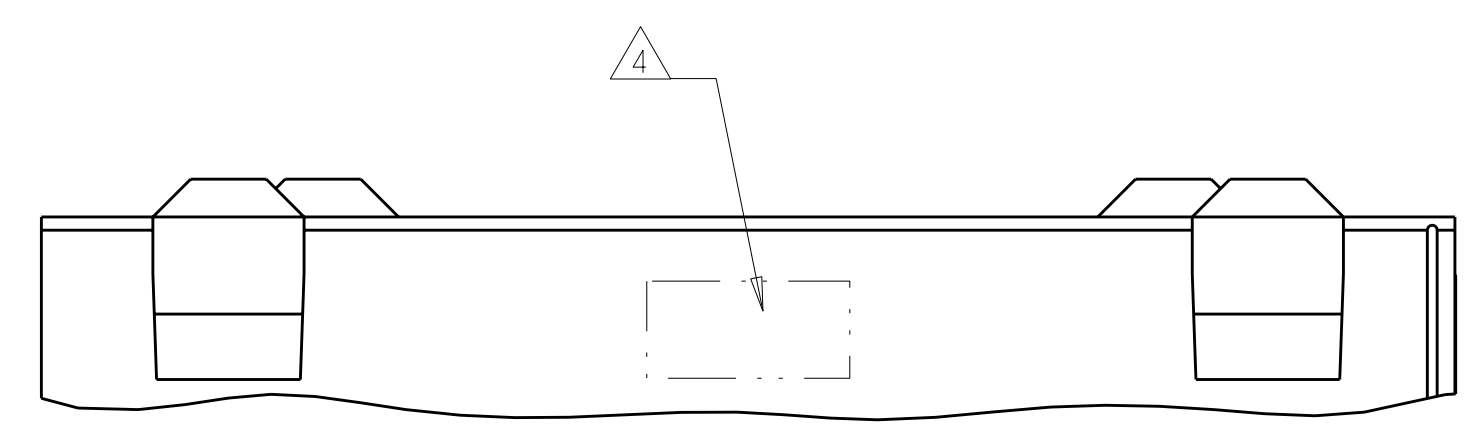

6469294-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 25JUL2004		STE TE Connectivity	
DIMENSIONS: mm		CHK R. A. PATTERSON 25JUL2004		NAME RECEPTACLE ASSEMBLY, 4 PAIR, 37.5mm HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD R. PATTERSON 17MAY2007		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
0 PLC ±		PRODUCT SPEC		A100779C-6469294	
1 PLC ±		APPLICATION SPEC		SCALE 5:1 SHEET 1 OF 1 REV B	
2 PLC ±		WEIGHT			
3 PLC ±		CUSTOMER DRAWING			
4 PLC ±					
ANGLES ±					
FINISH					