
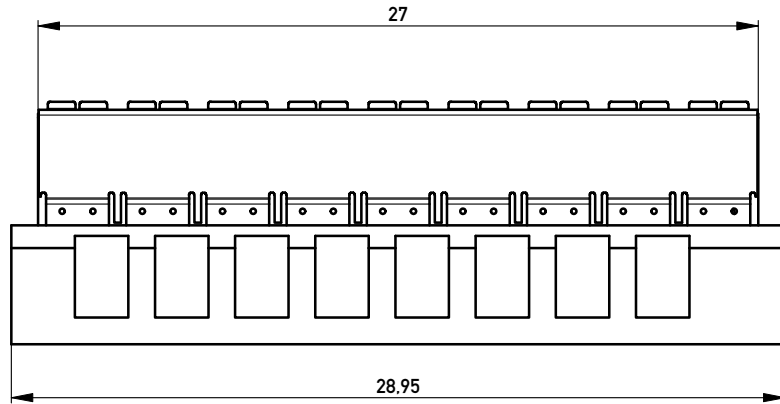
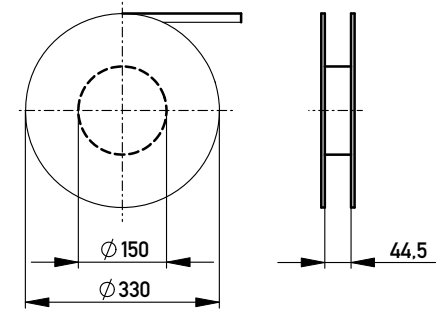
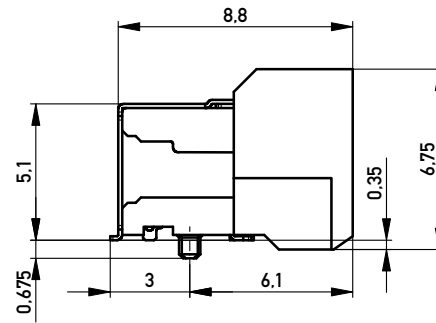


Verpackt in Gurtverpackung - *Tape on Reel Packaging*
Verpackungseinheit: 400 Stück - *Packaging unit: 400 pcs*

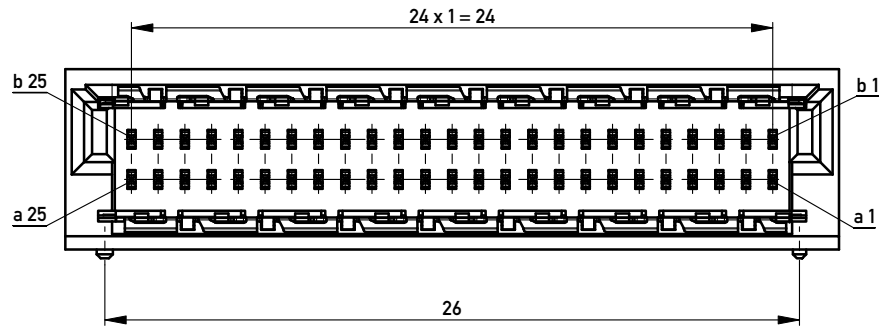

Anforderungsstufe 1
Performance Level 1



Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 μm
Terminal Area 4-6 μm tin plating

Koplanarität der Anschlüsse $\leq 0,1 \text{ mm}$
Coplanarity Area of Termination $\leq 0,1 \text{ mm}$

Leiterplatten-Layout Vorschlag / *PCB-Layout Proposal*

Abspulrichtung - *Reel off Direction*

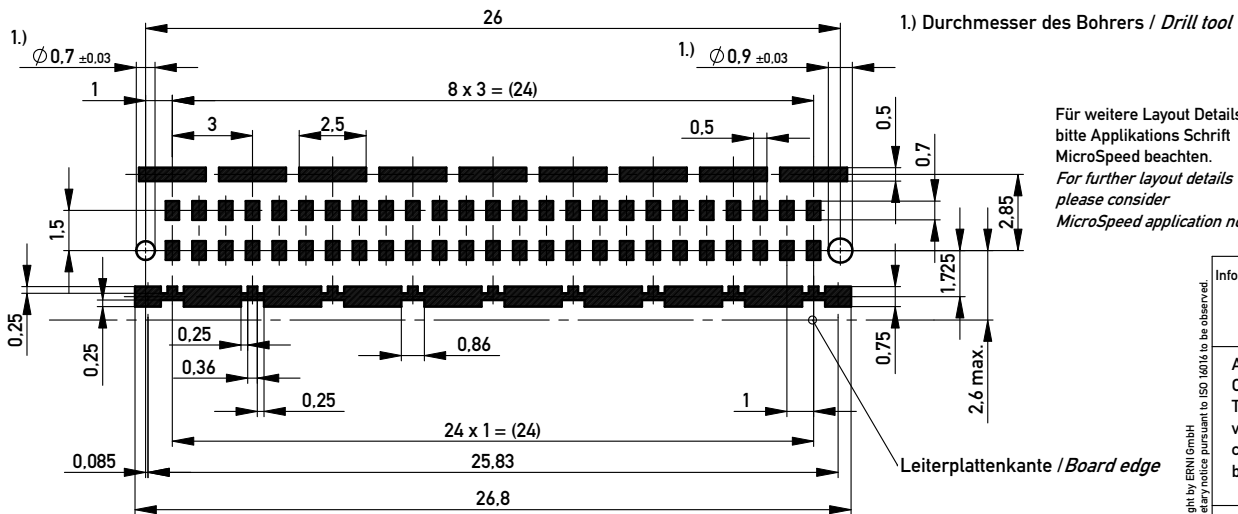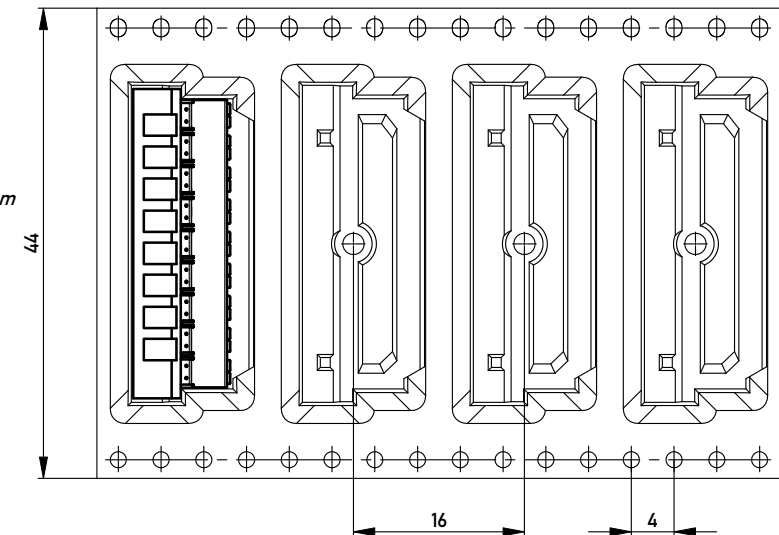

Für weitere Layout Details
bitte Applikations Schrift
MicroSpeed beachten.
*For further layout details
please consider
MicroSpeed application note.*

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16116 to be observed

Information:			Tolerances		 All Dimensions in mm		Scale		5:1				
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.				Designation						
							Messerl. 90° 50p SMD BM BA-EMV <i>male 90° 50 cont SMD BM BA-EMV</i>						
					www.ERNI.com		284332				I		
d		17.11.2010								A3			
Index		Date						Class		MSPEED			