

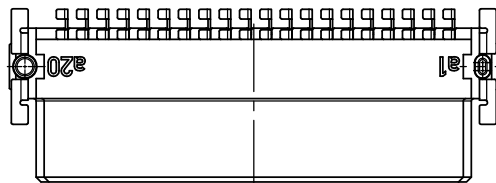
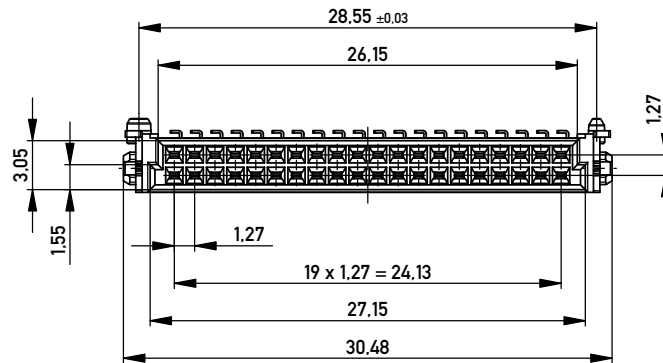
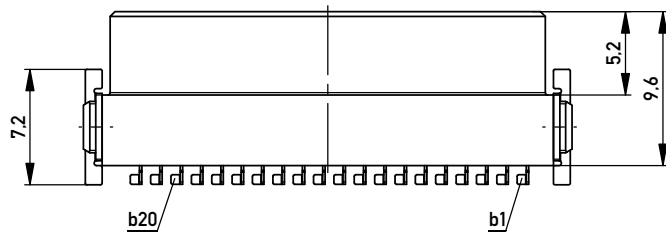


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

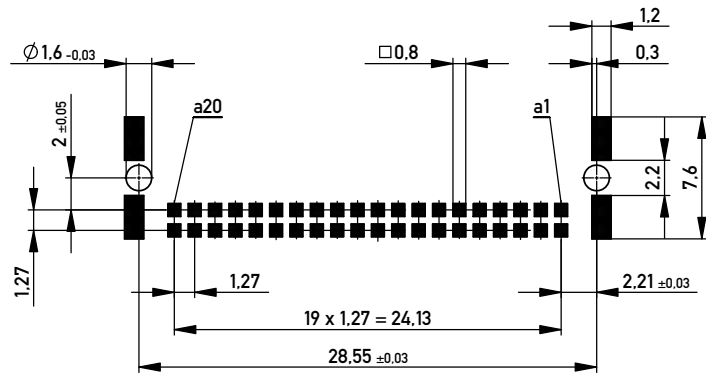


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 μm
Terminal Area 4-6 μm tin plating

Koplanarität der Anschlüsse $\leq 0.1 \text{ mm}$
Coplanarity Area of Termination $\leq 0.1 \text{ mm}$

Verpackt in Gurtverpackung - Tape on Reel Packaging
Verpackungseinheit: 560 Stück - Packaging unit: 560 pcs

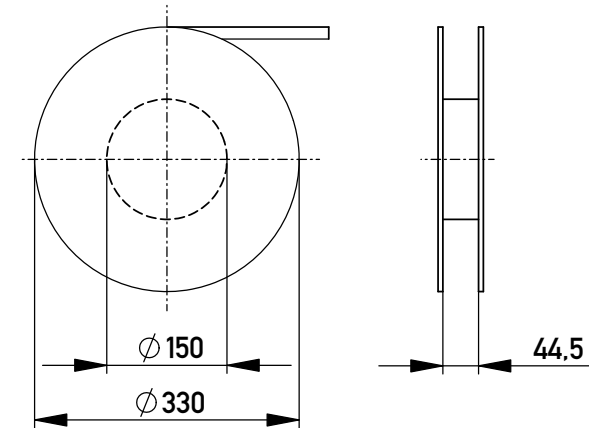

Abspulrichtung - Reel off Direction

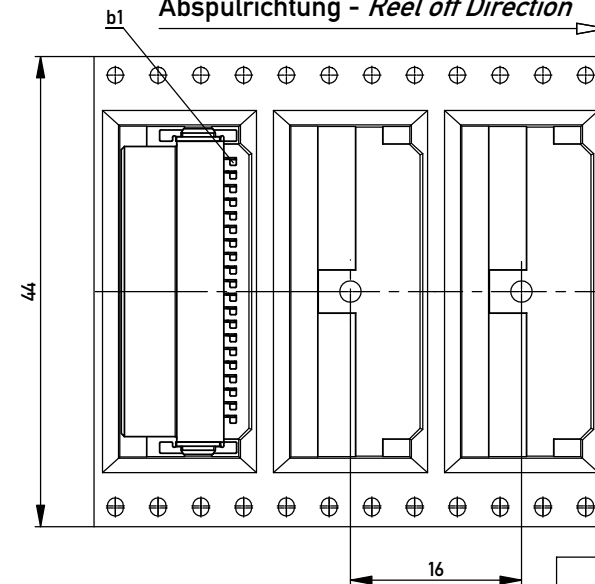

BA7-03 - Standard Bauhöhe

type7-03 - standard assembly height

Information:		Tolerances		Scale	3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
a		05.04.2011		Federl. SMC-Q 40-SMD-BA7-03	
Index		Date		Female SMC-Q 40-SMD-type7-03	
		ERNI www.ERNI.com		354081	
				I	
				A3	
				Class	
				SMCQ	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.