




LOC	DIST —	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

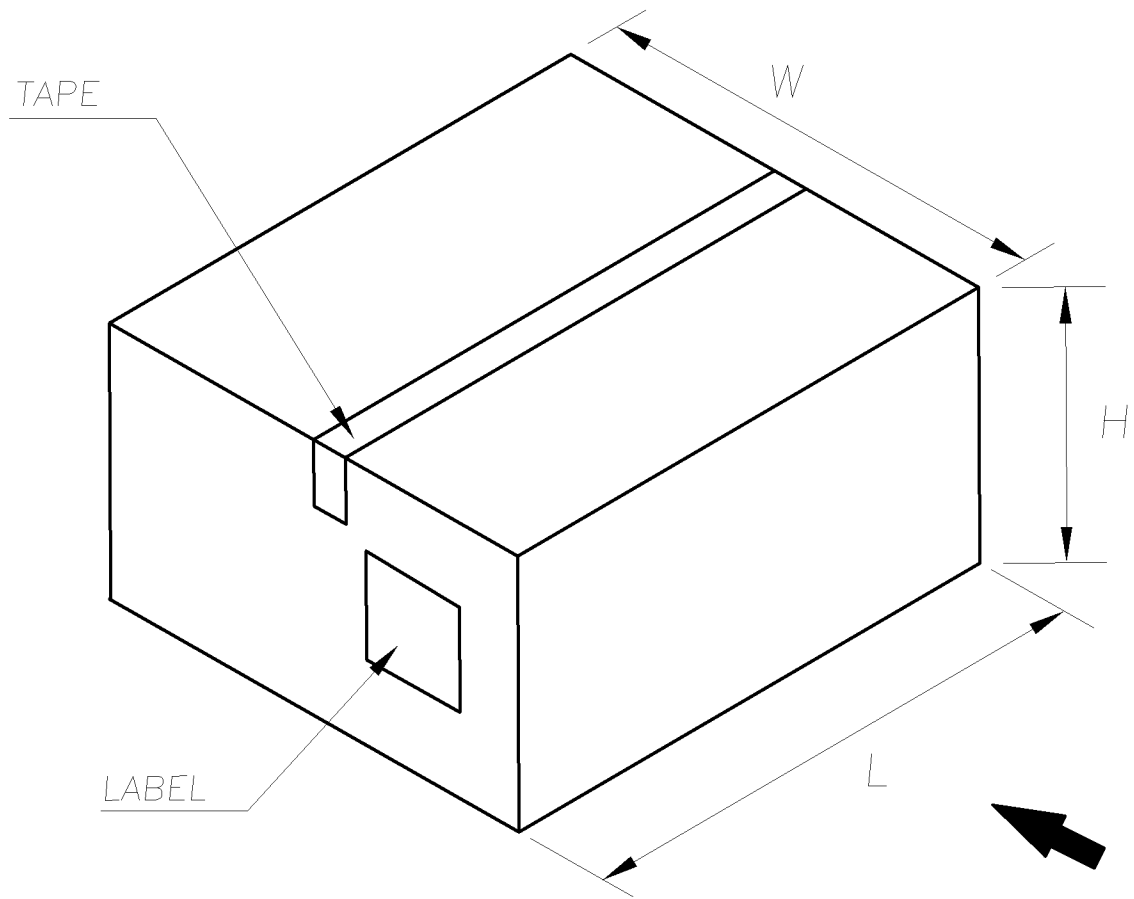


BOX

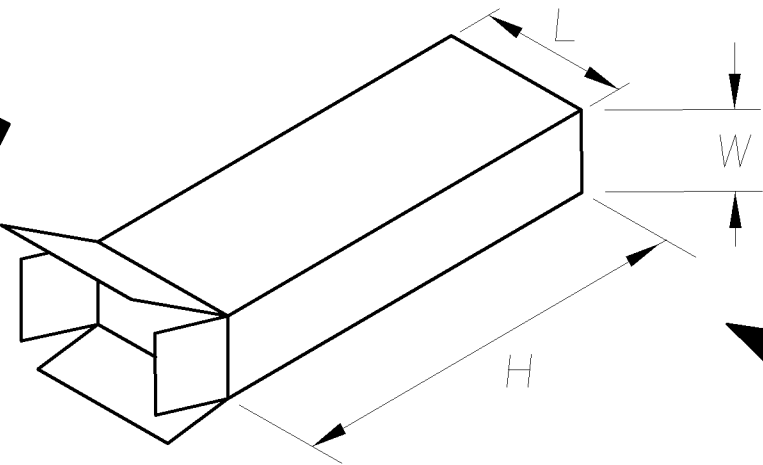

INNER CARTON

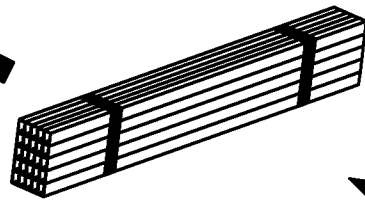


SHEAF

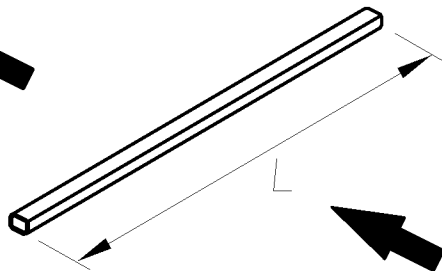

TUBE




CONNECTOR

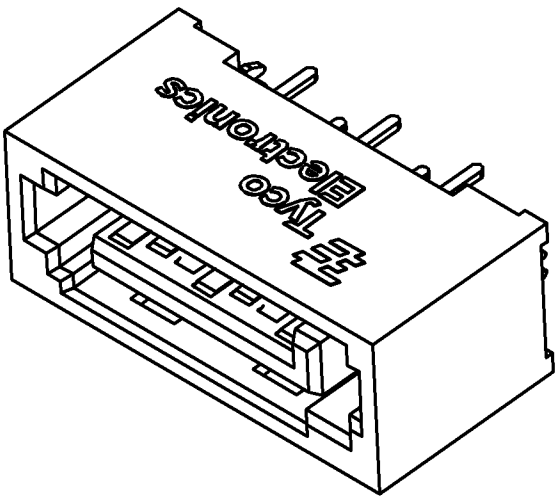

NOTE:

1. DIMENSION:
TUBE: L= 473, W= 13.4, H= 8.1
INNER CARTON: L= 485, W= 72, H= 86
CARTON: L= 500, W= 187, H= 169
2. QUANTITY:
26 PCS/TUBE
45 TUBES/SHEAF
1 SHEAFS/INNER CARTON
4 INNER CARTONS/CARTON
4680 PCS/BOX
3. WEIGHT:
N/W: 4.68 KG
G/W: 6.68 KG

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
DIMENSIONS: MM		CHK	NAME SERIAL ATA CONNECTOR, 7 PIN, VERTICAL HEADER, B TYPE.			
		APVD				
		PRODUCT SPEC —				
		APPLICATION SPEC —				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C=1775058	RESTRICTED TO —
MATERIAL —		FINISH —	CUSTOMER DRAWING			
			SCALE —	SHEET 2 OF 3		REV F


LOC	DIST	REVISIONS					
DW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

D



C

B


A

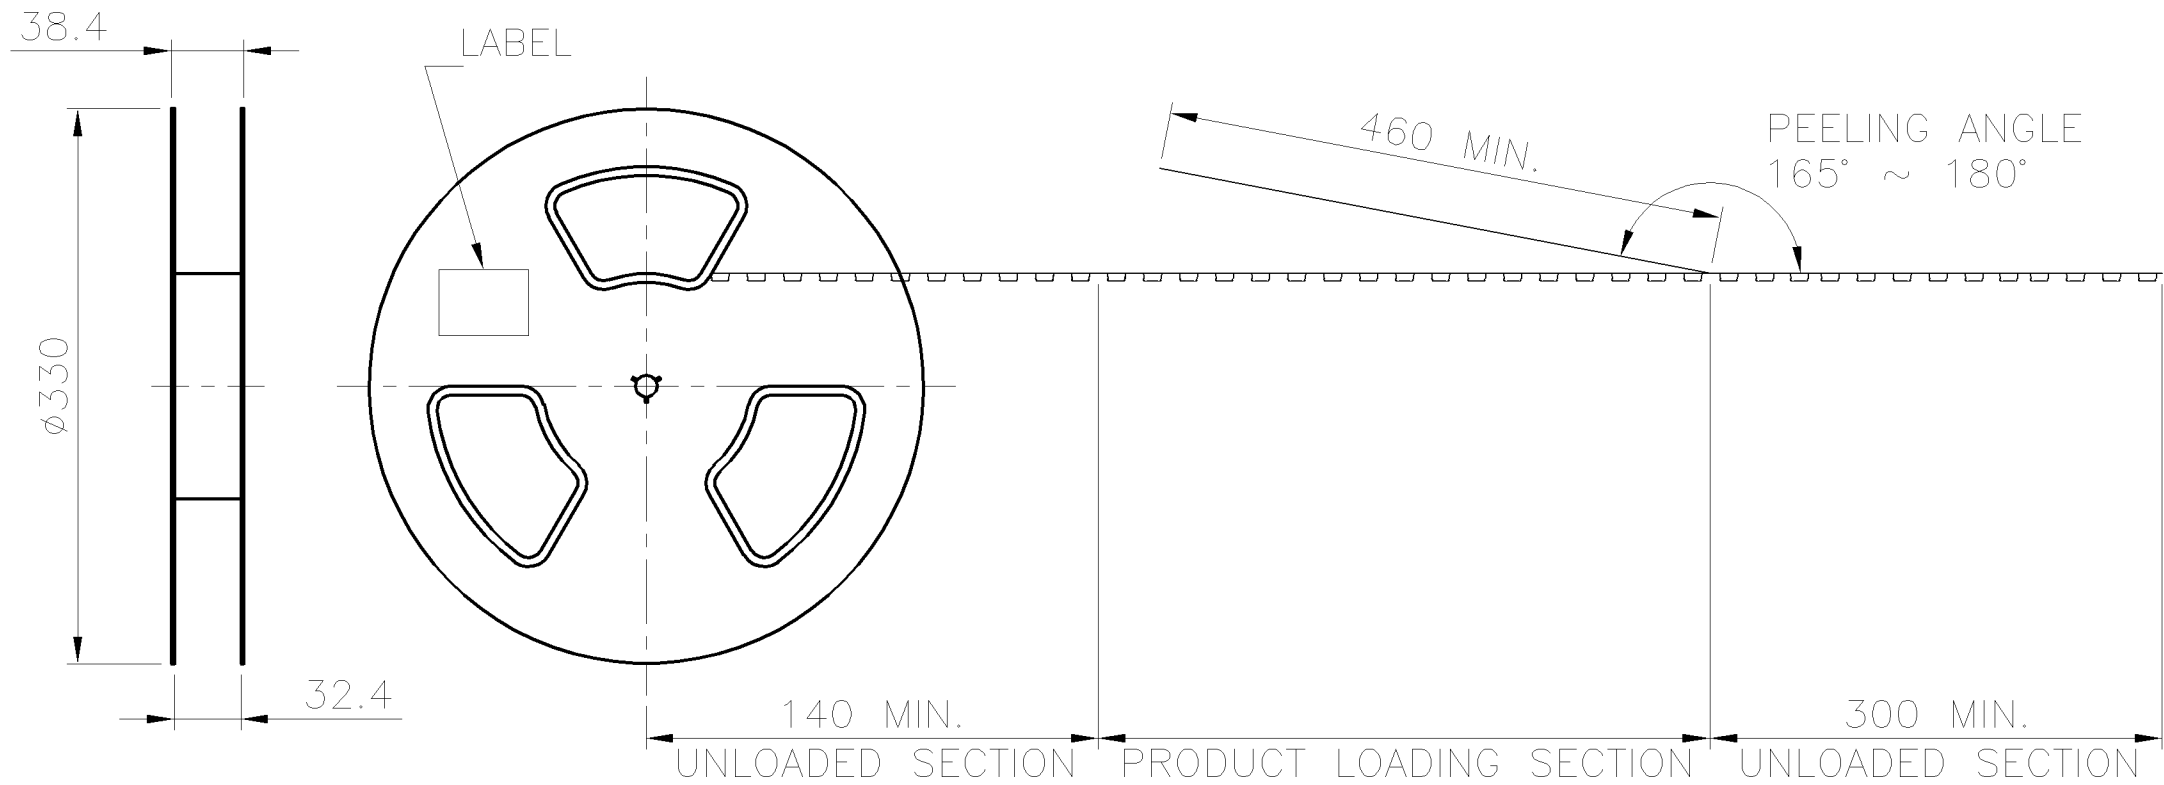

- NOTES:
- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
COVER TAPE: PET, TRANSPARENT COLOR.
CARRIER TAPE: POLYSTYRENES, TRANSPARENT COLOR.
REEL: HIPS, BLUE COLOR.
BAG: POLYETHYLENES, TRANSPARENT COLOR.
 - EACH BAG SHALL BE INCLUDED DESICCANT.
 - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS).
 - PEELING SPEED: 300 mm/min.

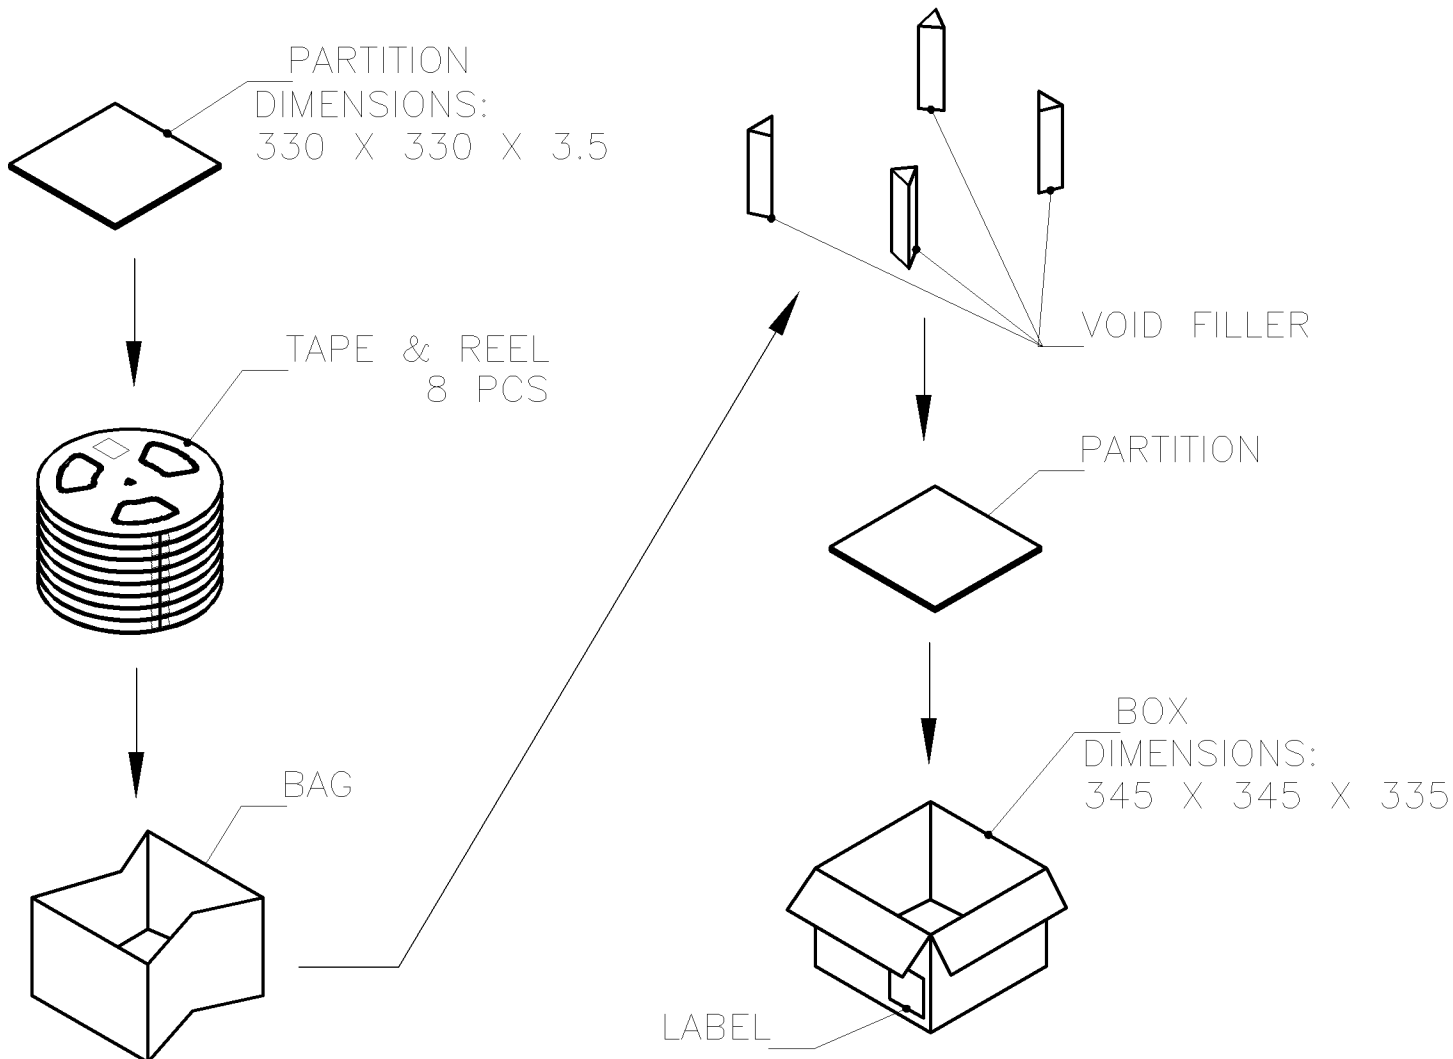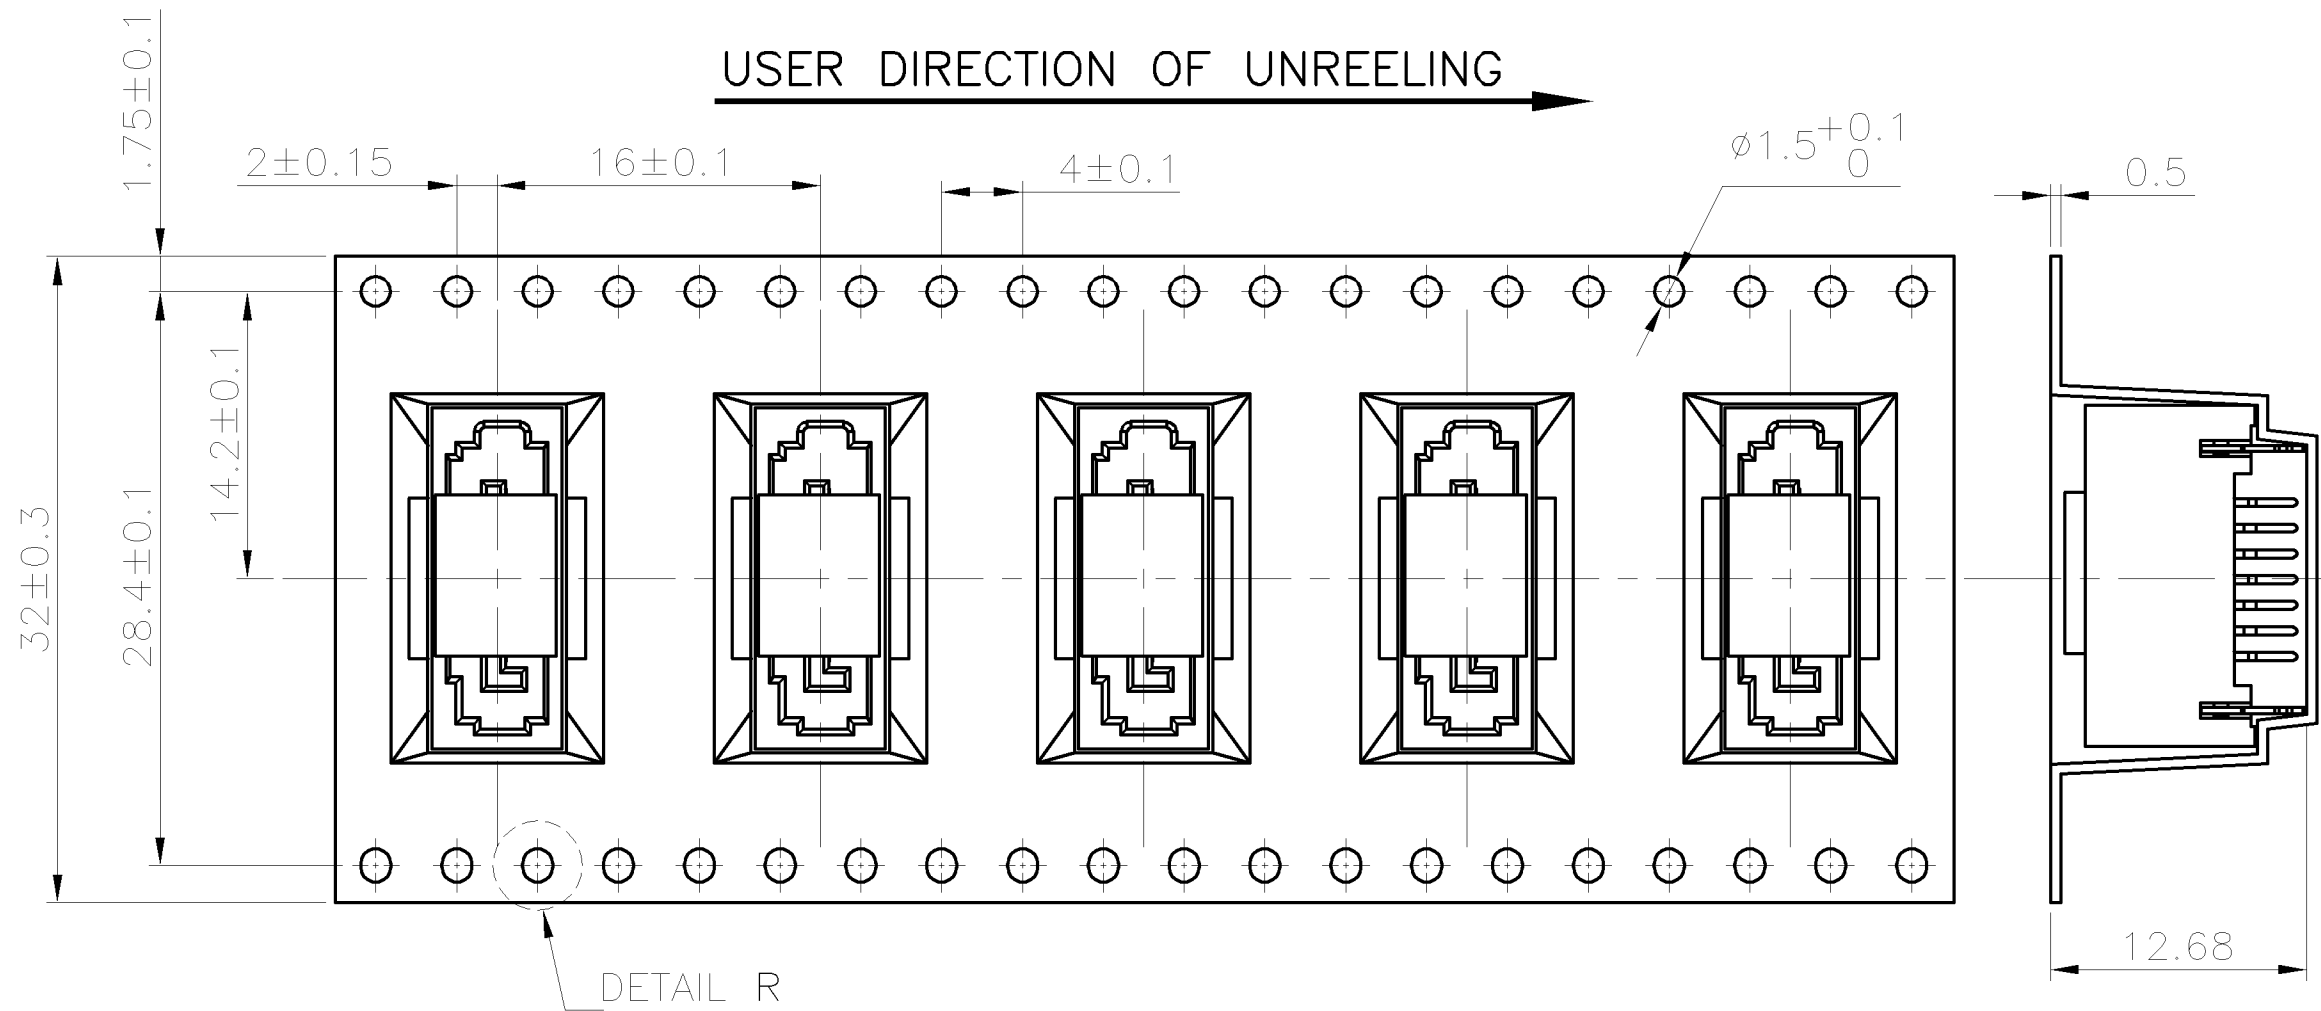

2400	8	300	4-1775058-8
			4-1775058-7
			4-1775058-5
PCS/BOX	REELS/BOX	PCS/TAPE	PART NUMBER

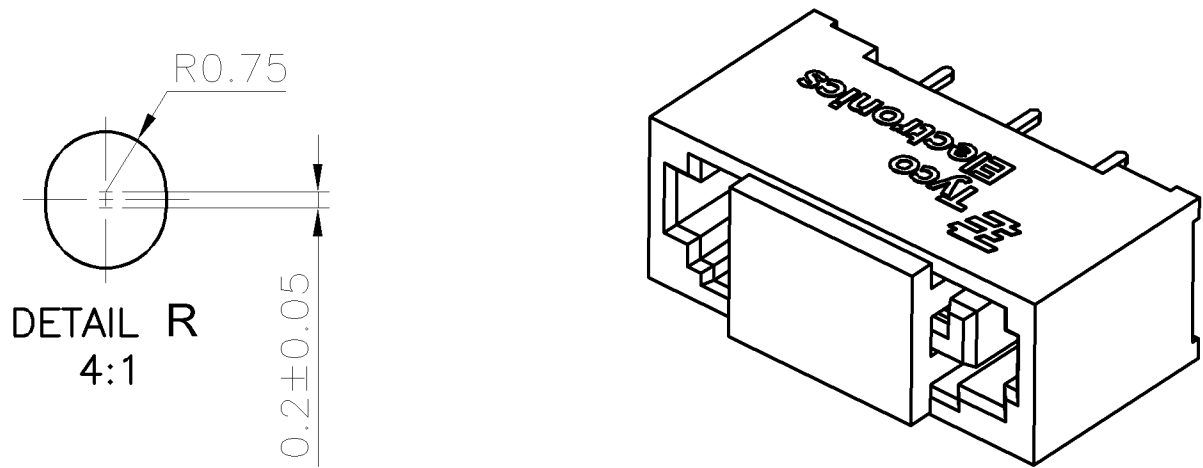

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
		CHK				
		APVD	NAME			
DIMENSIONS: MM		PRODUCT SPEC	SERIAL ATA CONNECTOR, 7 PIN, VERTICAL HEADER, B TYPE.			
		APPLICATION SPEC				
		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		FINISH	A3	00779	C=1775058	
			CUSTOMER DRAWING		SCALE	SHEET
					—	3 of 3
						REV F