


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		B3	ECR-10-023377	12NOV2009	SR	TV
			B4	ECR-11-013895	29JUN2011	SR	BR
			B5	ECR-11-017365	19AUG2011	SR	BR


Notes

- 1
- SUITABLE CRIMP CONTACTS:
-SERIES TYPE III+; CUSTOMER DRAWING: 164161
-SERIES C12; CUSTOMER DRAWING: 927888
-SERIES HD.M; CUSTOMER DRAWING: 1105000
-WIRE INSULATION: MAX. Ø4.2 MM
-DIMENSIONS: (OVER ALL) 24x24x34mm
- 2
- SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855-1
- 3
- SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855-6
- 4
- STANDARDS:
DIN EN 61984, DIN EN 60664-1
- 5
- AUTHORISATION; UL: UL-FILE NR.: E101788(R)
- 6
- PACKAGING:
PN 2-3 10 SETS IN A CARTON, PRE-MOUNTED
PN 2-4 500 SETS IN A CARTON, PRE-MOUNTED

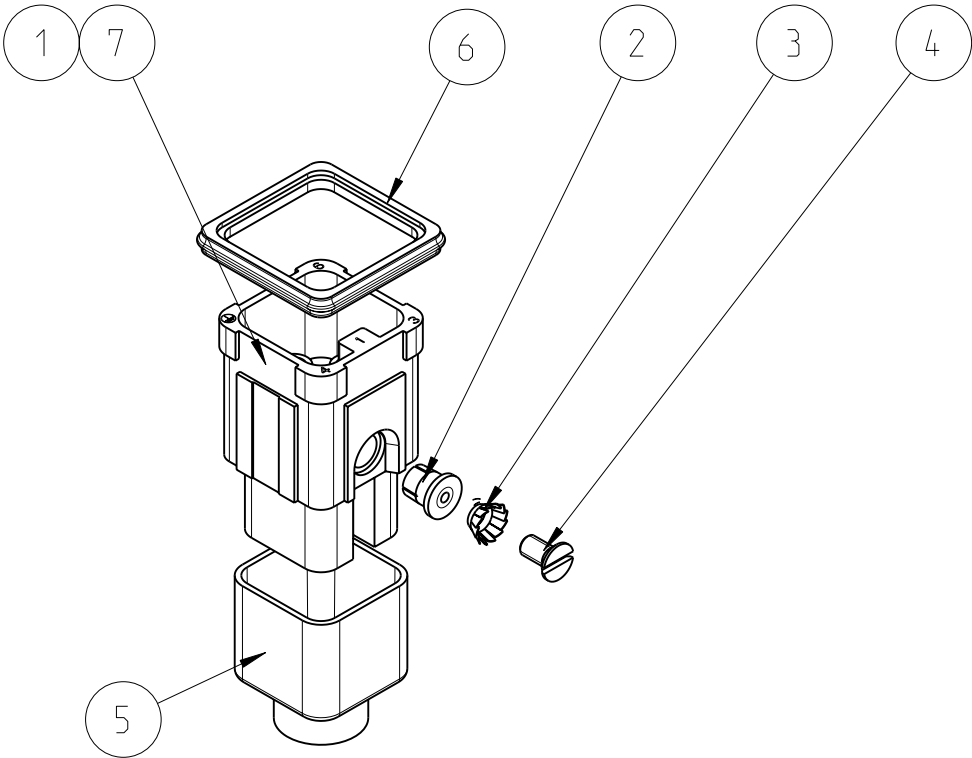

	1	INSTRUCTION LEAFLET				8
1		MALE INSERT	PA66-GF25	LIGHT GREY	SERIES HD7, 8-POS. , TYPE III+, SIZE1	7
1	1	PROFILE SEAL	NBR 55	BLACK	SERIES HA/HG-Q, SIZE1	6
	1	INSULATION COVER	NBR 65	BLACK	SERIES HD7	5
1	1	SCREW THREAD INSERT	BRASS		M3x5.5, AFTERMOULD	4
1	1	WASHER, SERRATED LOCK	STAINL. STEEL		V3.4, DIN 6798 JULY 1988	3
1	1	SCREW, SLOTTED COUNTERSUNK FLAT HEAD	STAINL. STEEL		M3x6 DIN EN ISO 2009	2
	1	MALE INSERT	PC-GF20	LIGHT GREY	SERIES HD7, 8-POS. , TYPE III+, SIZE1	1
2-4	2-3	DESCRIPTION	MATERIAL	COLOR	NOTES	ITEM
		HD.7.STI.C/250V				
		HD.7.STI.C.La.250V				

CONTACT ARRANGEMENT
VIEW FROM TERMINATION SIDE



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09APR2002	TE Connectivity			
		CHK 09APR2002				
		APVD 09APR2002				
		T.SCHNURPFEL				
		PRODUCT SPEC	NAME			
		108-74002	MALE INSERT ASSY			
		APPLICATION SPEC	SERIES HD.7			
		-	-			
		WEIGHT	-			
		CUSTOMER DRAWING	SCALE 1:1			
			SHEET 1 OF 1			
			REV B5			