


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J				変更	
		D		REVISED PER ECR-11-008941	28JUL11
					T.T
					T.M

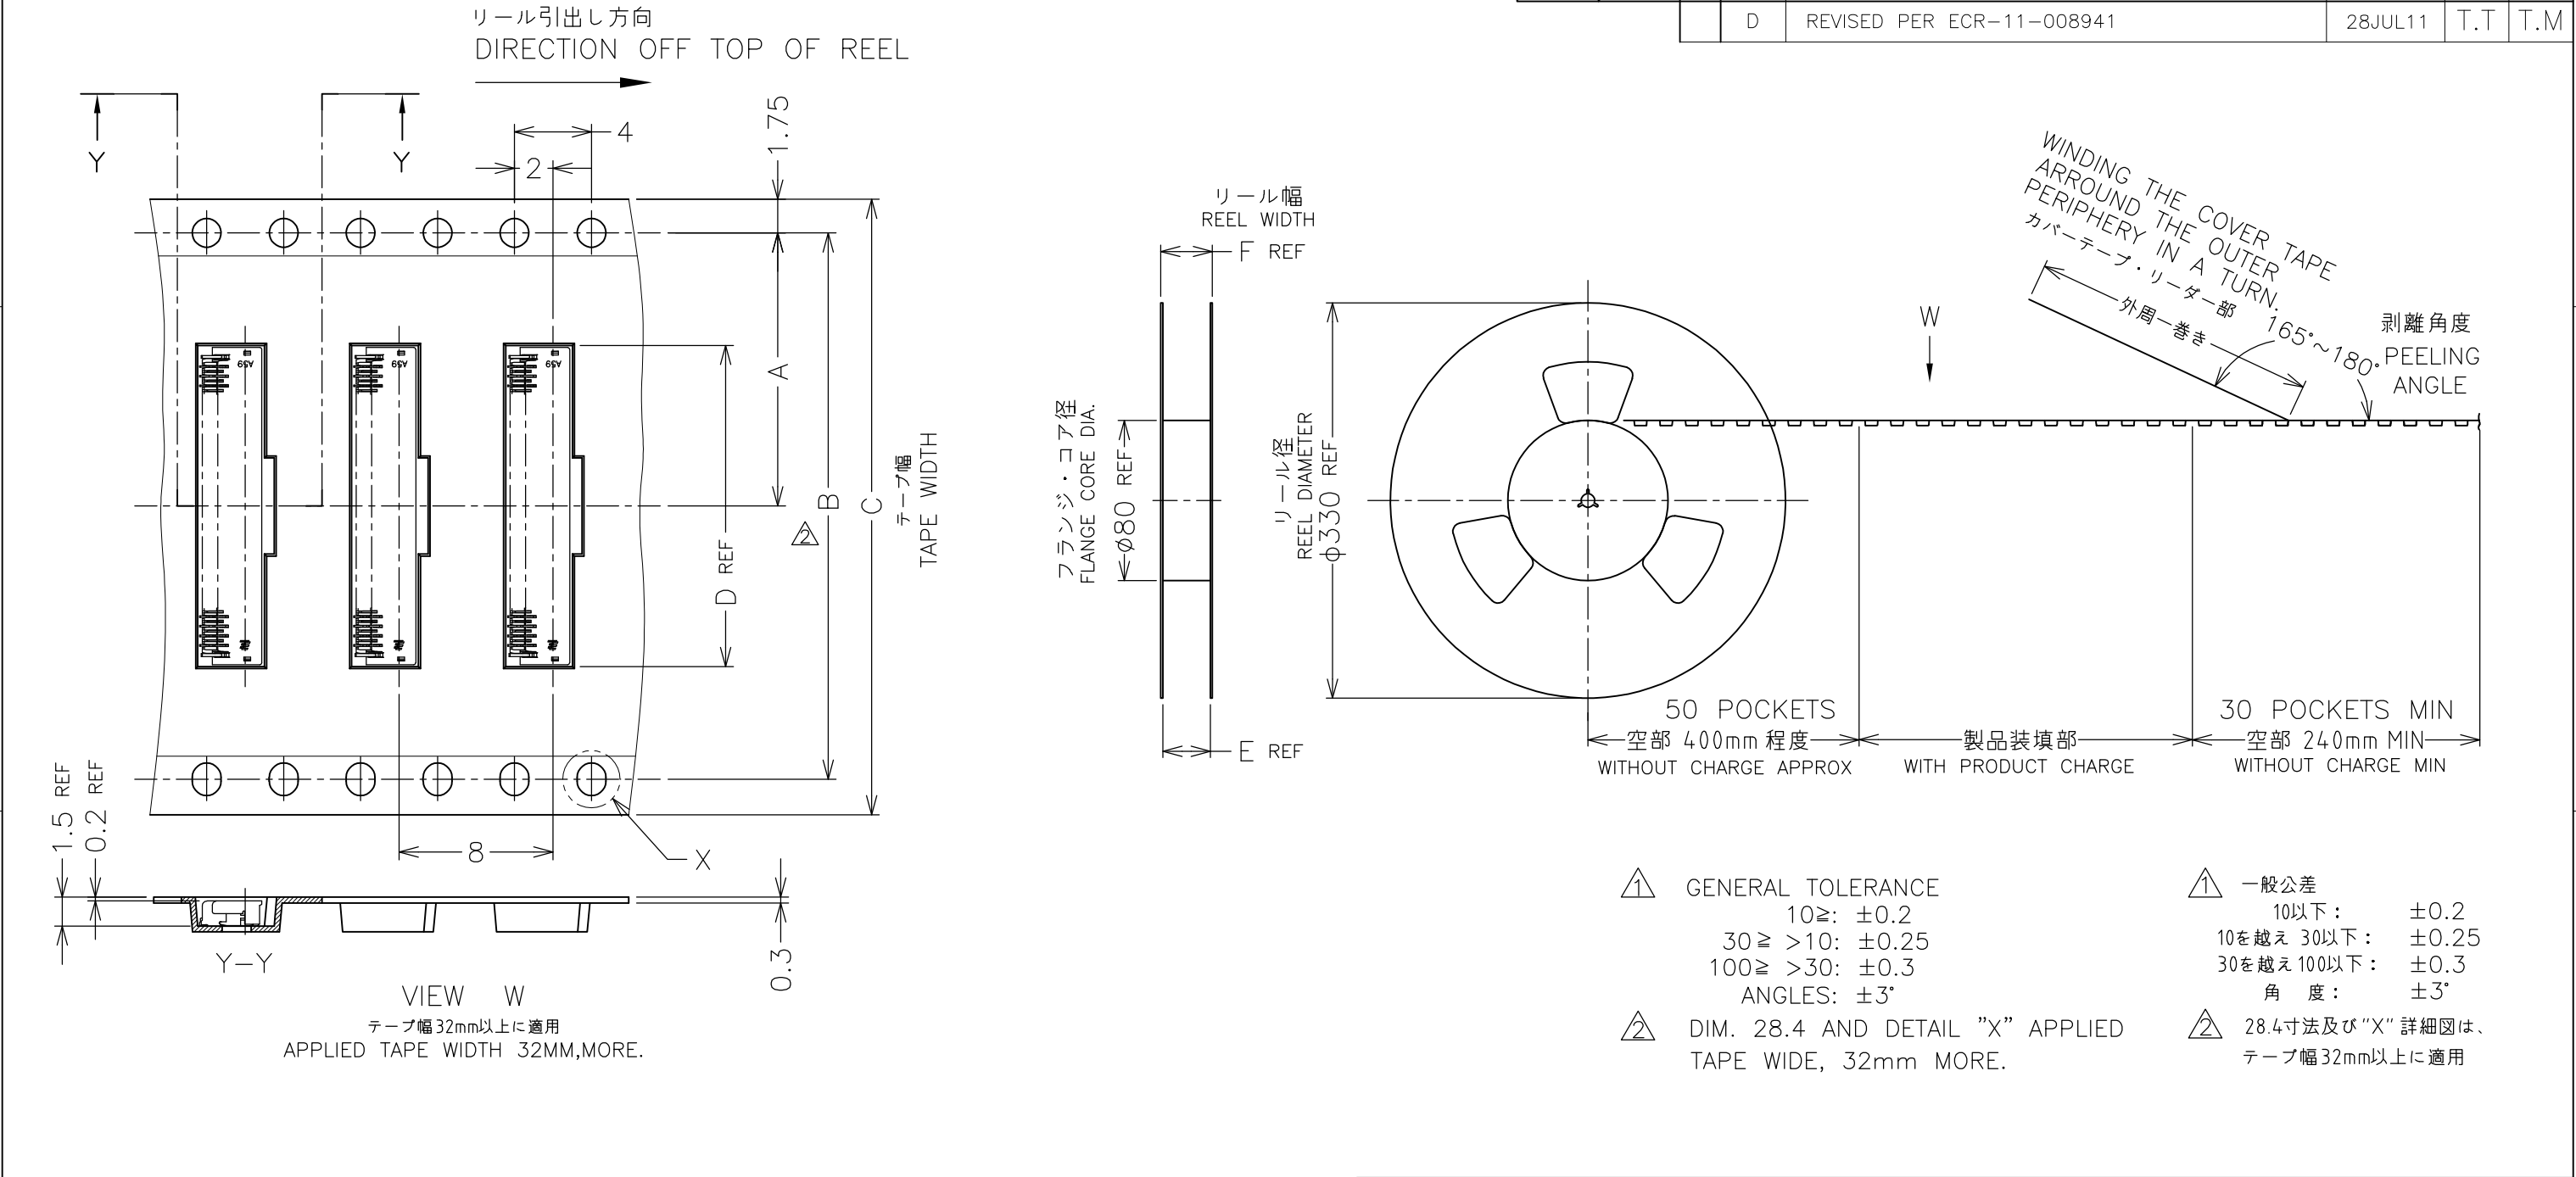

△ GENERAL TOLERANCE

10 ≥ : ±0.2

30 ≥ >10: ±0.25

100 ≥ >30: ±0.3

ANGLES: ±3°

△ DIM. 28.4 AND DETAIL "X" APPLIED

TAPE WIDE, 32mm MORE.

△ 一般公差

10以下: ±0.2


10を越え 30以下: ±0.25

30を越え 100以下: ±0.3

角 度: ±3°

△ 28.4寸法及び "X" 詳細図は、

テープ幅 32mm以上に適用

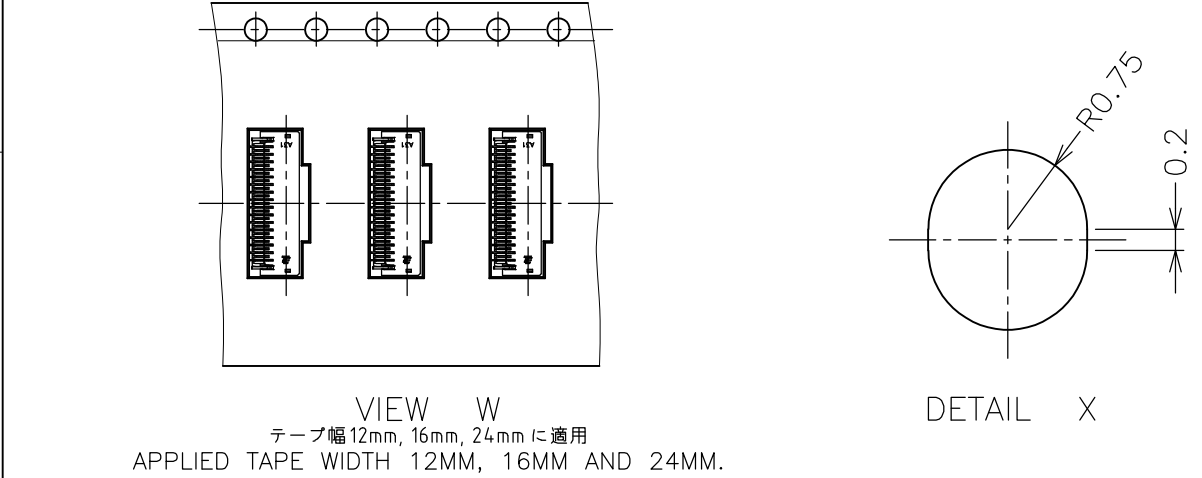

OBSOLETE	AVAILABLE	0.115g	30.4	24.4	17.2	24	—	11.5	3500	61	2-2040832-6
	AVAILABLE	0.080g	30.4	24.4	12.2	24	—	11.5	3500	41	1-2040832-6
	AVAILABLE	0.074g	30.4	24.4	11.2	24	—	11.5	3500	37	1-2040832-4
OBSOLETE	AVAILABLE	0.053g	22.4	16.4	8.2	16	—	7.5	3500	25	2040832-8
STATUS		CONNECTOR WEIGHT	F	E	D	C	B	A	数量(ヶ) QTY/REEL	POS.(N)	EMBOSS TAPE PACKAGING PART NUMBER
			DIMENSIONS								

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH
仕上

DWN Y.KODAIRA 17NOV2008

CHK A.KUBO 26NOV2008

APVD T.KUSUHARA 26NOV2008

PRODUCT SPEC
製品規格
108-78650

APPLICATION SPEC
取付適用規格
411-78338

WEIGHT

TE Connectivity

0.25FPC BF-L-1.3H
1.3mmH, 3.2mmW, GOLD PLATE

SIZE A3 CAGE CODE 00779 DRAWING NO 番号 C-2040832

RESTRICTED TO

CUSTOMER DRAWING

SCALE 尺度 NTS SHEET 1 OF 2 REV D

