
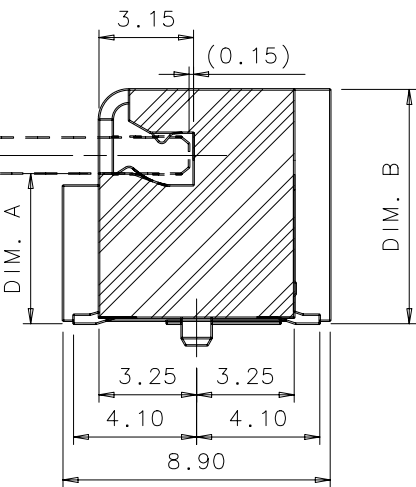



REV.	ECN. NO.	APPD.
A	HC-05-2896	Bruce Wu

- NOTE: UNLESS OTHERWISE SPECIFIED:
- ELECTRICAL CHARACTERISTICS :
 - CONTACT CURRENT RATING : 0.5 AMPERE MAX. PER PIN.
 - VOLTAGE RATING 50V DC PER CONTACT.
 - INSULATION RESISTANCE : 250 MEGAOHMS. MIN. AT 500 VDC.
 - MECHANICAL CHARACTERISTICS :
 - DURABILITY : 25 MATING CYCLES.
 - OPERATION TEMPERATURE : -40°C TO + 85°C
 - INTERPRET DRAWING PER ANSI Y14.5M-1994.

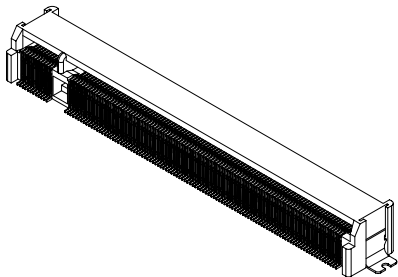


SECTION A-A

DIM. A	DIM. B
1.5	4.3
2.7	5.5
5.0	7.8

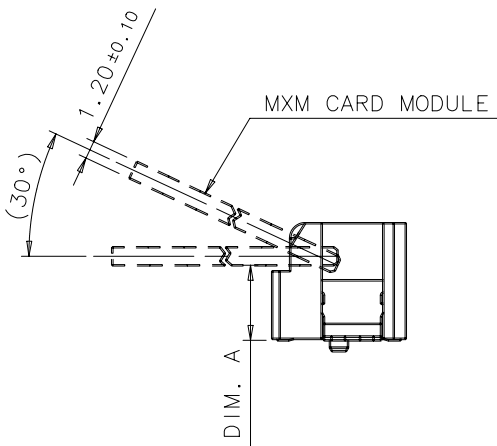

AS0B326-S**N-7F
 SINGLE ROW
 POS. NO.: 230
 SMT
 CONTACT AREA
 GOLD PLATING
 6:10u" MIN.

LEAD FREE
 PACKAGE CODE
 HEIGHT 78:7.8mm
 55:5.5mm
 43:4.3mm
 STANDARD TYPE

X. ± 0.30	X°. ±	UNITS mm	NAME (INTENDED USE) 0.5P. 230POS. MXM CONNECTOR	FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.			
.X ± 0.25	.X° ±	MAT'L	PART NO. (INTENDED USE) AS0B326-S**N-7F	TITLE: CUSTOMER DRAWING			
.XX ± 0.15	.XX° ±	FINISH	APPD: Bruce Wu 03/31'05	DWG NO.: 317-0000-1088			
.XXX±	.XXX°±		CHKD: Bruce Wu 03/31'05		SCALE N/A	SHEET 1/2	REV. A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.			DR: H.L.Chen 03/28'05				
Q'TY							

