


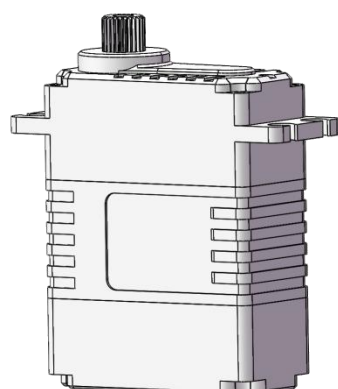


Technical Specification

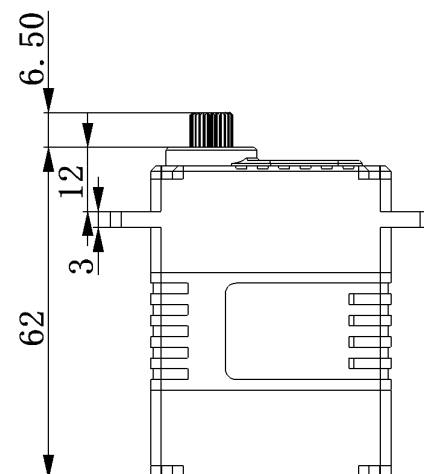


25T-8mm
Output Shaft Spline

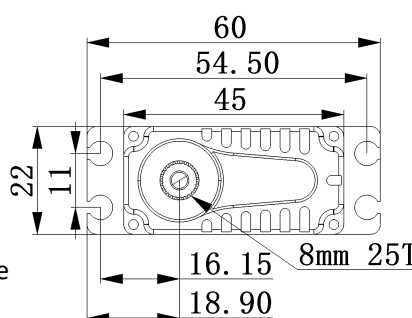

1. Operating Data

Rated Voltage	DC24V
Voltage Range	DC20V-26V
No-load current	50mA
Stalling Torque	80Kgf.cm
No load speed	330°/sec
Rated Speed	270°/sec
Stalling Current	3.2A
Rated Torque	35Kgf.cm
Rated Current	1.20A
Working Frequency	1520us/333Hz
Pulse Width	500us-2500us
Temperature Range	-30°C.....+65°C
Default Travel Angle	±100°=200° Total angle
Dead Band	2us
Gear Backlash	≤0.5°
Command Signal	PWM or CANOPEN 2.0B
Dimensions	45mm*22mm*62mm(±0.2mm)
Weight	130g±10%
Case Material	Aluminum Alloy
Motor Type	Brushless DC Motor
Gear Set Material	Hardened Steel
Position Sensor:	Contactless
Ball Bearing:	6BB

2. Performance

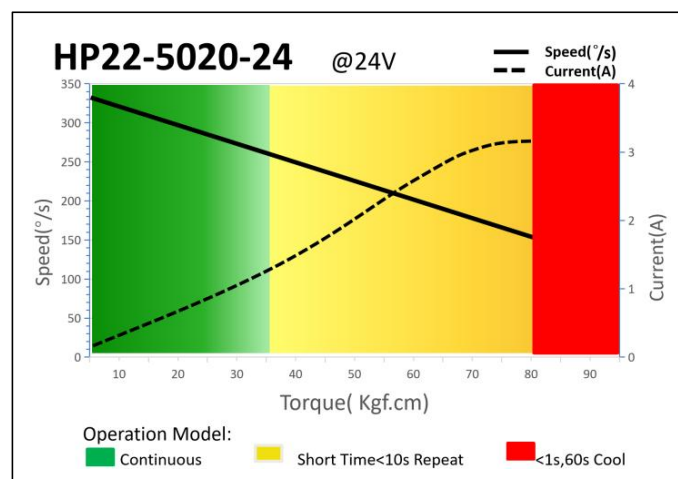

3.Command Signal

PWM or CANOPEN 2.0B

3.1 .1 PWM Command Interface



Signal Voltage	HIGH: min.3.3V, max.5.0V Low: min.0.0V, max.1.5V
Pulse Width	500us-2500us
Pulse Width for Position	1000us/1500us/2000us -50°/ 0°/+50°

3.1 .2 CAN Bus Command Interface

Baud-Rate	500Kbps
Node number	0 x25 (range 1 ~ 127, 0 is radio)
Communication	CAN Open

3.2 .1 PWM Position Feedback Signal



The Position Feedback signal (Pos FB) is an analog output signal with a voltage value which is directly related to the output shaft's angular position. Reference is **FB -**.

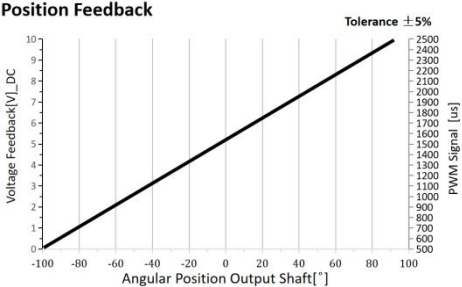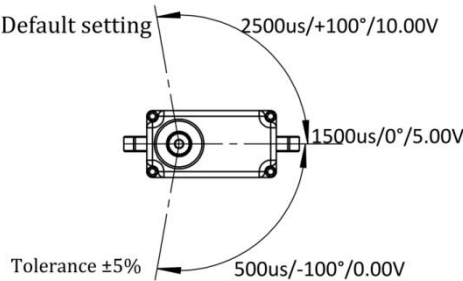




3.2.2 CANBUS Feedback

Integrated in the Bus protocol a Feedback Value, including the Angle position, Temperature, current value. Value read by sending request command. Provide the details of the bus in the document.

4. Electrical Connection

PWM Connection	Pin Assignment			
	1	Yellow	SIG	Command Signal
	2	Red	DC+	Supply Voltage
	3	Brown	DC-	Supply Ground
	4	White	FB +	Feedback Signal (Option)
	5	Black	FB -	Feedback Signal Ground (Option)
CANBUS Connection	Pin Assignment			
	1	Red	DC+	Supply Voltage
	2	Black	DC-	Supply Ground
	3	White	CAN_H	
	4	Brown	CAN_L	

5.Accessories: Aluminum Servo Horn , Item No. : 0825.50

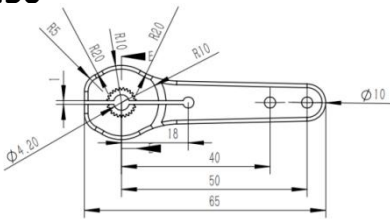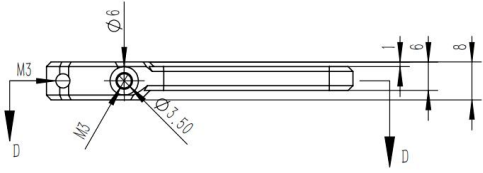

6. Item Number System

