



Jasper Electronics

1580 No. Kellogg Dr. Anaheim, CA 92807 Phone (714) 917-0749 Fax (714) 917-0786



CC5C250A

- Power the world with highest efficiency -

250W, MSL-250A05



- **Input Voltage / PFC:** 90 ~ 305 Vac / 0.99 (typical)
- **Output Wattage:** 250W, Constant Current – 5 channels
- Fully encapsulated with waterproof **IP67** level compliant,
- Reliability **Protections:** OVP, OTP, SCP
- **High Efficiency:** up to 94%
- **Safety Regulation:** Comply with UL8750 & EN61347
- **MTBF:** 300,000 hrs @ 25°C, full load, 110Vac input
- **Lifetime:** 70,000 Hrs @ 110 Vac Input, 80% load, 25°C ambient Temp.
- **Warranty:** 5-year



| Model No. | Output Voltage (V) | Output Current (A) | No. of Channel | OVP (Vmax.) | OCP Hicup (%) | Efficiency (%) | Comment |
|------------------------|--------------------|--------------------|----------------|-------------|---------------|----------------|--------------------------------------|
| MSL-T0700IC48.0-250A05 | 42 - 48 | 0.7 | 5 | 65 | 110 -180 | 93 | EUV-250S054ST MSL-T0700IC48.0-A05 |

Input Specification

| Parameter | Conditions/ Description | Min. | Normal | Max. | units |
|-----------------------|--------------------------------------|-------------|-----------|-----------|-------|
| Input Voltage Range | Universal Input | 90 | 100 - 277 | 305 | Vac |
| Input Frequency Range | | 47 | | 63 | Hz |
| Input Current | 100 - 240Vac input, full load output | | | 2.8 / 1.3 | A |
| Power Factor | At 100 - 240Vac Input | 0.99 / 0.96 | | | |
| Inrush Current | At 264Vac Input, 25°C cold start | | | 50 | A |

Output Specification

| Parameter | Conditions/ Description | Min. | Normal | Max. | units |
|--------------------------------|--|------|--------|------|--------|
| Line Regulation | | | | ±1 | % |
| Load Regulation | | | | ±3 | % |
| Ripple and Noise | 20MHz Bandwidth, refer Note-1 | | | 2 | %pk-pk |
| Voltage Overshoot / Undershoot | % of Vout when power turn on or off | | | 5 | % |
| Turn-On Delay | Measured at 100 - 240Vac Input and Full Load | | | 5 | S |

General Specification

| Parameter | Conditions/ Description | Min. | Normal | Max. | units |
|--------------------------------|--|------------------------|------------------|---------|-----------|
| Efficiency | Refer to individual models | 90 | | 92 | % |
| MTBF | Per MIL-HDBK-217F @ 25°C ambient temperature, 110Vac input | | 300,000 | | Hours |
| Operating/ Storage Temperature | | -35 / -40 | | 70 / 80 | °C |
| Dimension (L x W x H) | EUV -250ST MSL-A05 | 252.0 x 101.0 x 46.3 / | 10.0 x 4.0 x 1.8 | | mm / inch |
| Weight | EUV-250ST + MSL-A05 | 1,300 + 650 | | | g |

Safety & EMC Compliance

| Parameter | Standard | Category | Comment |
|-----------|---|---|---------|
| SAFETY | USA & Canada: UL 8750 Compliance to UL 1012, UL 935 CAN/ CSA-22.2 No. 0. CSA-C22.2 No. 250.0 | cUL | |
| | Europe: EN 61347-1, EN61347-2-13 | CE | |
| | EMI | Conducted emission Test & Radiated emission Test with 6 dB margin | EN55015 |
| EMS | Harmonic Distortion, Current Emission | EN61000-3-2 | |
| | Voltage Flicker and Fluctuation | EN61000-3-3 | |
| | Electrostatic Discharge (ESD) | EN61000-4-2 | |
| | Radiated RFI | EN61000-4-3 | |
| | Fast Transients - burst | EN61000-4-4 | |
| | Input Line Surge Immunity | EN61000-4-5 | |
| | Conducted RFI | EN61000-4-6 | |
| | Power Freq Magnetic Field | EN61000-4-8 | |
| | Voltage Dips | EN61000-4-11 | |
| | Electromagnetic Immunity Requirements Applied to Lighting Equipment | EN61547 | |

Environmental Protection

| Parameter | Standard | Level | Comment |
|-----------|-----------------------------------|-----------|---------|
| ROHS | European Directive 2002 / 95 / EC | Compliant | |




- Power the world with highest efficiency -

250W, MSL-250A05

Dimension: (L x W X H) (mm/inch)

- EUV-250: 252.0 x 101.0 x 46.3 / 10.0 x 4.0 x 1.8
- A05: 179.0 x 55.0 x 20.0 / 7.7 x 2.2 x 0.8

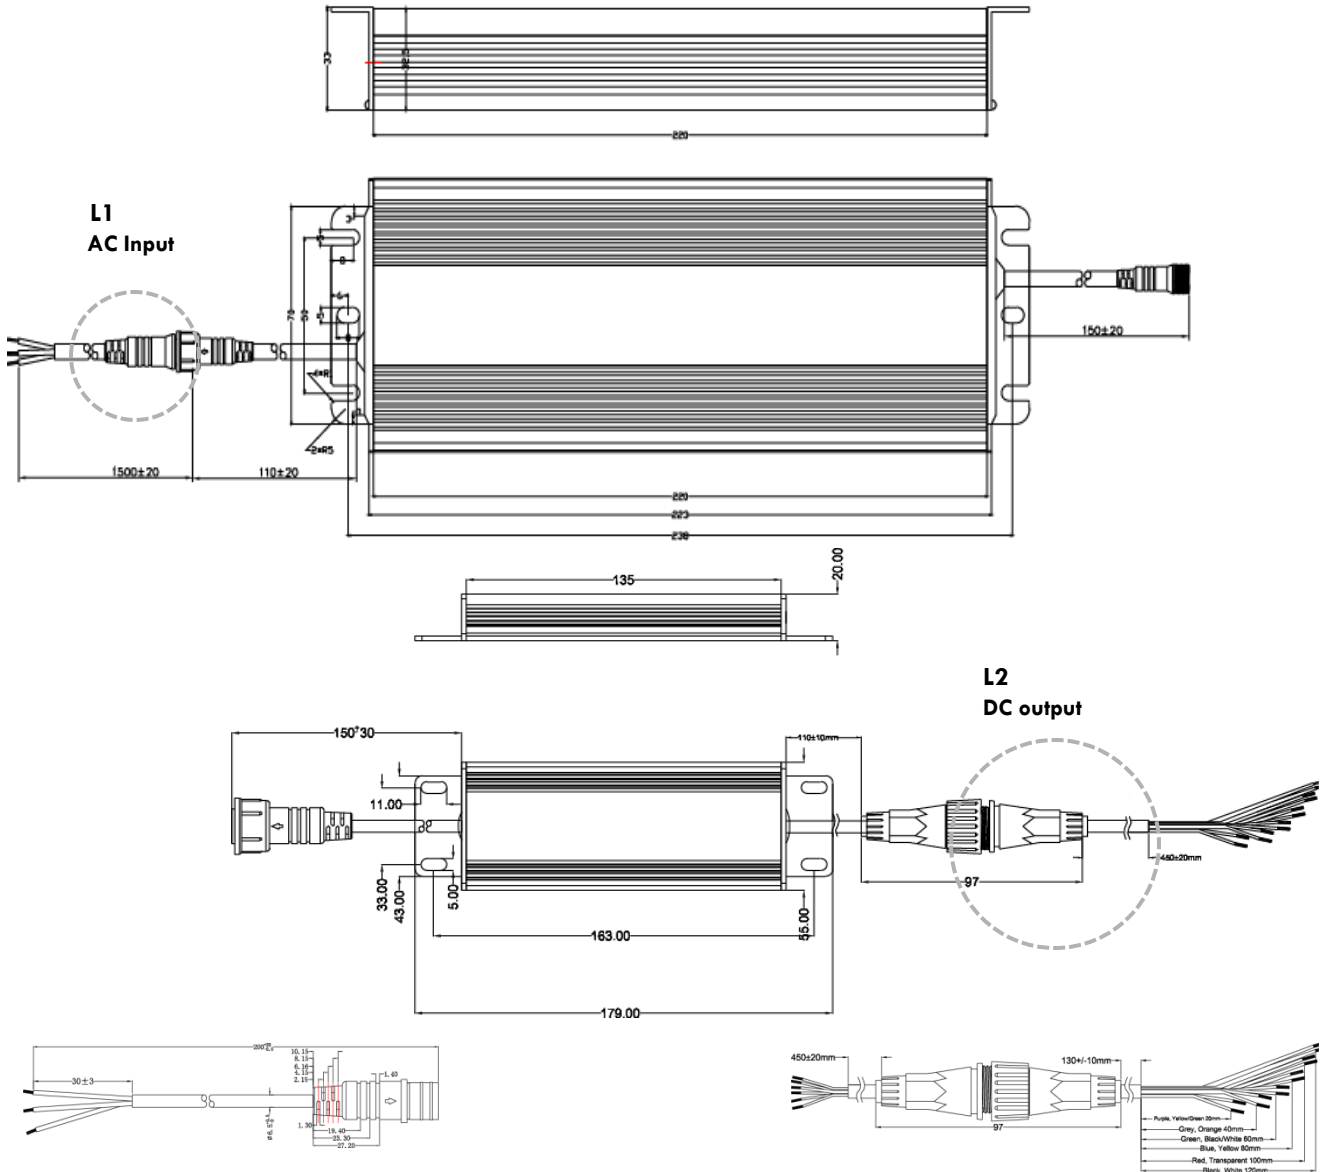

Input wiring assembly

- Brown (N), Blue (L), Green/Yellow (G) – 200±30mm

Output wiring assembly

- White(+), Black (-) / Red (+), Transparent (-)
- Blue (+), Yellow (-) / Green (+), Black/White (-)
- Grey (+), Orange (-) – 680±30mm

1. Datasheets are updated as needed and as such, specifications are subject to change without notice.
2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured.
3. Mechanical drawings (model No. MSL-T462IC56.0-250A + MSL-T0700IC48.0-A05) is for reference only. The cable wire configuration may vary from other custom designed models as picture showing. Please contact your sales representative for detail.
4. Specifications are for reference only. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified.