

EFAP-S250

Flex ATX 250W Server Power Supply

Features:

80PLUS® Bronze Level Efficiency

Meet ErP Lot 6 (EuP) 2010

0~40°C Working Temperature

SSI Standard Compliant

Modular wire harness for customized wiring

General Specification

- Input Range: 100 to 240 VAC, +/-10%
- Power Factor: 0.95 minimum
- Efficiency: ≥85% @ 115VAC
- Hold Up Time: 17ms
- Short Circuit Protection
- Over Power Protection
- Over Voltage Protection
- No Load Operation
- MTBF >100,000 Hours@25°C
- Operating Temperature: 0 to 50 °C
- Operating Humidity: 20 to 90 %
- EMI/RFI: CE, FCC class B
- Safety: UL, TUV, CCC, CB, BSMI



Input and Output Characteristics

Input			Output						
Voltage	Frequency	Current	Load	+3.3V	+5V	+12V1	+12V2	-12V	+5VSB
100~240 VAC	47~63Hz	Max. 5A	Max.Load	14A	17A	8A	14A	0.8A	2A
			Min.Load	0.1A	0.2A	0.1A	0.5A	0A	0A

1. The +5 & +3.3 Volt combine total output shall not exceed 110W
2. The +12 Volt combine total output shall not exceed 18A
3. Peak power output shall not exceed 275W for maximum 1 second


Ripple and Noise

Output	+3.3V	+5V	+12V1/+12V2	-12V	5Vsb
Load Regulation	±5%	± 5%	± 5%	± 10%	± 5%
Line Regulation	± 1%	± 1%	± 1%	± 1%	± 1%
Ripple & Noise	50mV	50mV	120mV	120mV	50mV

Mechanical

Outline Dimension: 81.5x40.5x150(mm)

Outline Drawing

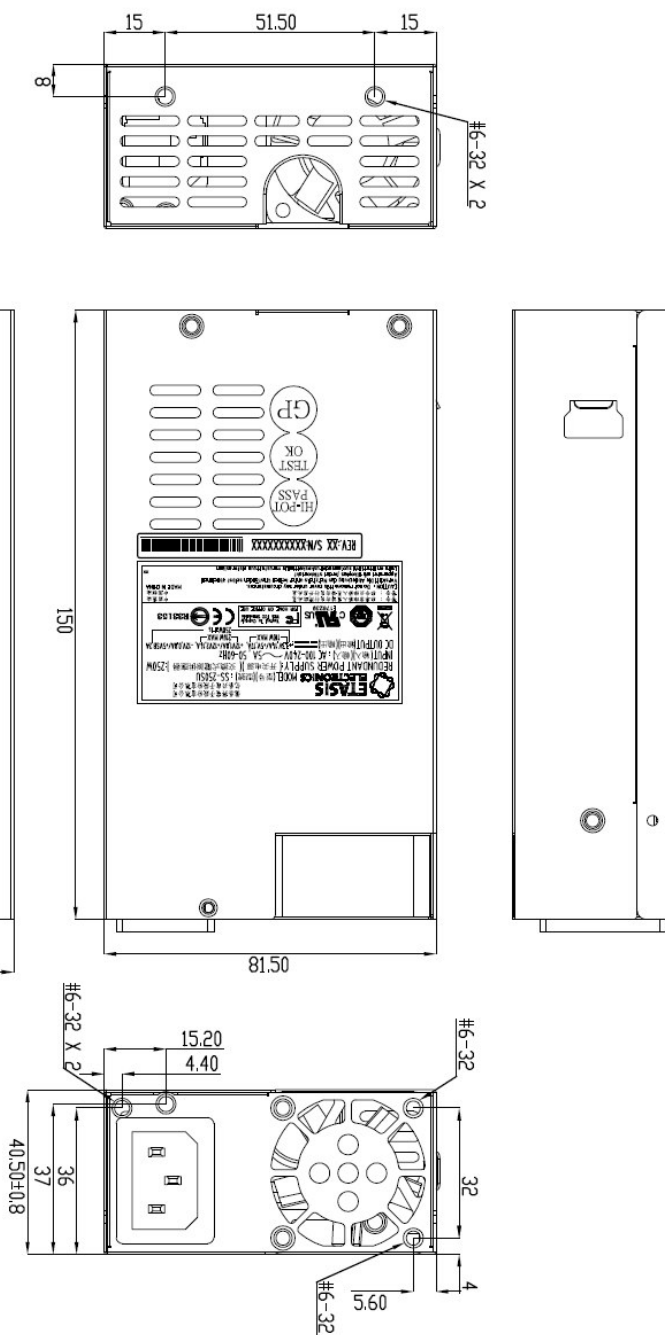

©ETASIS Electronic Corporation. All rights reserved. ETASIS Electronics Corporation reserves the right to make changes to their products, specification, or to discontinue any product and its service at anytime without notice. The information and specification from ETASIS is believed to be accurate and reliable. However, ETASIS assumes no responsibility for any business loss due to specification changes. ETASIS products are not designed to be used in system deemed to be critical, or in any system wherein failure or malfunction could result in injury or death.