

### FEATURES

- Open VPX VITA 62 compliant
- Wide input range
- High power DC output
- Efficiency of 90% typical
- Conduction cooled at card edge
- Conformal coating on PWA



### 3U Open VPX VITA 62 High Power Multi-Output Power Supply

The Behlman VPXtra™500M COTS DC to DC power supply is a rugged, highly reliable, conduction cooled, switch mode unit built for high-end industrial and military applications. The VPXtra™500M is a VITA 62, Open VPX compliant, 3U power supply that delivers 550 Watts of DC power via six outputs. The 12V, 3.3V, and 5V main outputs can be paralleled for higher power. The VPXtra™500M can accept a 28 VDC input, IAW MIL-STD-704, and can supply a high power DC output at various power levels.

The VPXtra™500M power supply has no minimum load requirement and has overvoltage and short circuit protection as well as over current and thermal protection. The power supply is designed to support the rigors of mission critical airborne, shipboard, vehicle and mobile applications.

Designed and manufactured with *Xtra-Cooling™*, *Xtra-Reliable™* Design and *Xtra-Rugged™* construction makes the Behlman VPXtra™500M your best choice.

#### INPUT

**Voltage:** 18 to 36 VDC  
Operates below 22 VDC  
with de-rating

#### OUTPUT

**Power:** 550 Watts

**Voltage/Current:**

- VS1** 12 VDC +/- 1% @ 25 Amps
- VS2** 3.3 VDC +/- 1% @ 12 Amps
- VS3** 5 VDC +/- 1% @ 40 Amps
- Auxiliary:** 3.3 VDC +/- 1% @ 1 Amp
- Auxiliary:** -12 VDC +/- 1% @ 0.375 Amps
- Auxiliary:** +12 VDC +/- 1% @ 0.375 Amps

**Line Regulation:** 0.5% maximum

**Load Regulation:** 2.0% maximum (0-100%)

**PARD-Ripple & Noise:** 50mV p-p (0-20 MHz) for 3.3V and 5V outputs.  
120mV p-p for 12V and +12/-12V auxiliary outputs.

**Efficiency:** 90% typical, 50-100% load

#### PROTECTIVE CIRCUITS

**Over Voltage:** 120% typical

**Over Current:** 120% typical

**Short Circuit:** Automatic recovery

**Over Temp:** Shutdown

#### CONTROLS (IAW VITA 62)

**Inhibit:** Output Off- active low

**Enable:** Input On- active low

#### INDICATOR

**DC STATUS LED:** Bi-color LED (Red/Green)

### GENERAL CHARACTERISTICS

#### Isolation:

Input to Output: 500 VDC  
 Input to Case: 500 VDC  
 Output to Case: 500 VDC

MTBF: 1,100,000hrs  $G_b$  @ 50°C,  
 IAW MIL HDBK-217F Notice 2

### ENVIRONMENTAL

#### Temperature at card edge (IAW VITA 47)

Operating: -40°C to +71°C  
 Storage: -40°C to +105°C


### MECHANICAL (1.0 inch pitch)

See O&C drawing 24163 for connector details and pin assignment

Dimensions: 3.94"L x 6.63"W x .97"H  
 Weight: 1.7 lbs.  
 Connector: TE P/N: 6450849-7

### COMPLIANCE

EMI (MIL-STD-461): CE102  
 Designed to meet the following:  
 Shock: VITA 47 Class OS2  
 Vibration: VITA 47 Class V3  
 Humidity: VITA 47

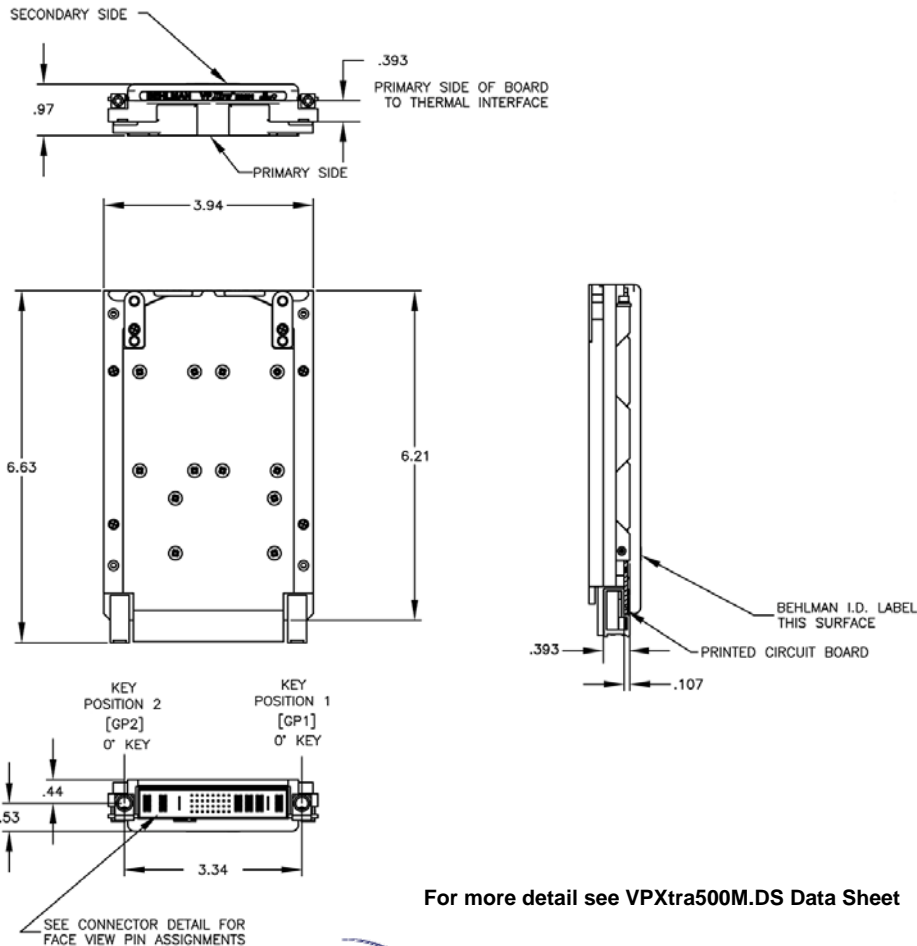

For more detail see VPXtra500M.DS Data Sheet



VITA Member

[www.behlman.com](http://www.behlman.com)

**ORBIT POWER GROUP**  
**Behlman Electronics**

Headquarters:  
 80 Cabot Court, Hauppauge, NY 11788  
 631 435-0410 800 874-6727  
 Fax: 631 951-4341

2363 Teller Road, Suite 108  
 Newbury Park, CA 91320  
 805 375-7046 800 456-2006  
 Fax: 805 498-2147

[sales@behlman.com](mailto:sales@behlman.com)