




T40B

Torque Flange

Special features

- Nominal (rated) torques 50 N·m, 100 N·m, 200 N·m, 500 N·m, 1 kN·m, 2 kN·m, 3 kN·m, 5 kN·m and 10 kN·m
- Nominal rated rotational speed up to 24000 rpm (depending on nominal range and option)
- Accuracy class 0.05 (50 N·m: 0.1)
- Large measurement frequency range up to 6 kHz (-3 dB)
- Digital transmission of measured values
- Compact design
- Low rotor weights and mass moments of inertia
- Optional: rotational speed measuring system, reference signal

Overall concept

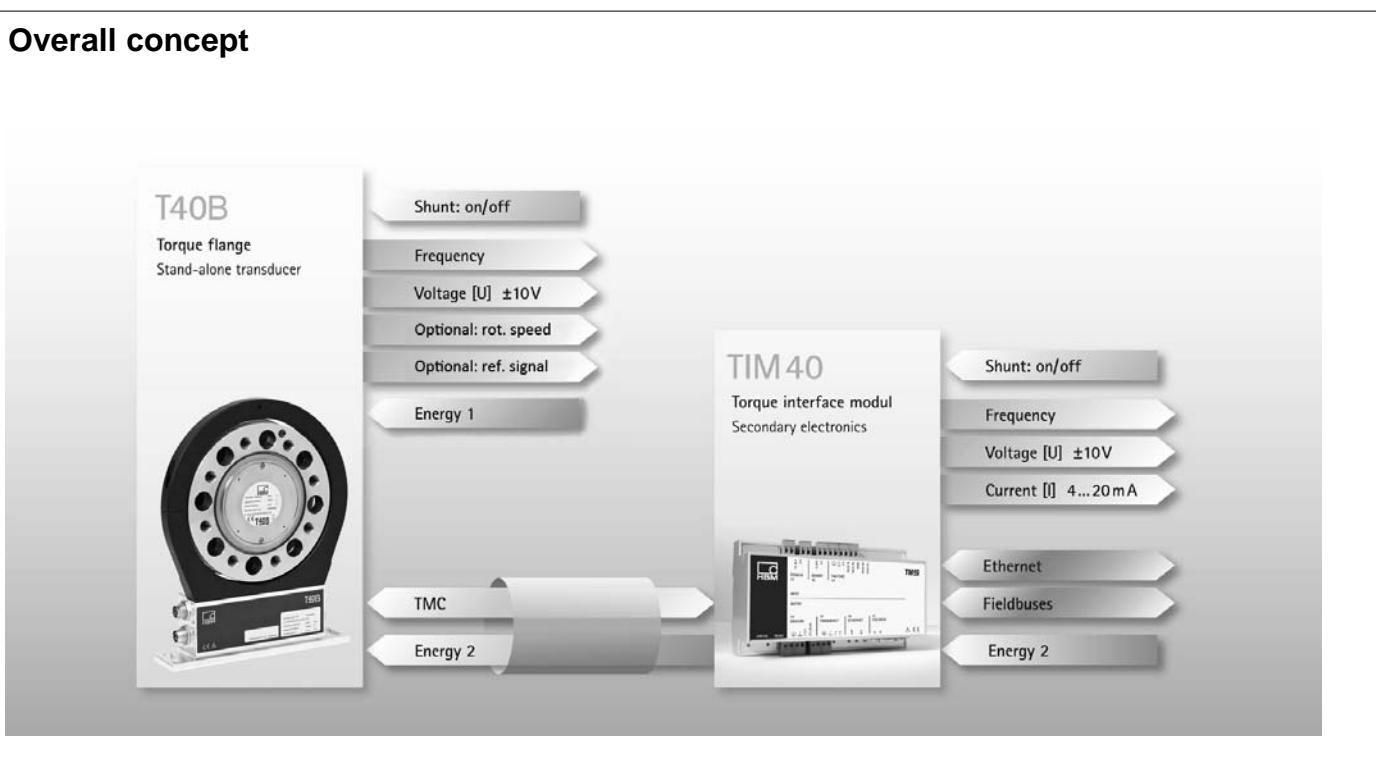

Specifications

Type	T40B																
Accuracy class	0.1	0.05															
Torque measuring system																	
Nominal (rated) torque M_{nom}	N·m	50	100	200	500												
	kN·m					1	2	3	5	10							
Nominal (rated) rotational speed standard speed (option M) high speed (option H)	U/min	20000				15000	12000	10000									
	U/min	24000		22000		16000	14000	12000									
Non-linearity including hysteresis , related to the nominal (rated) sensitivity Frequency output For a max. torque in the range: between 0% of M_{nom} and 20% of M_{nom} $> 20\%$ of M_{nom} and 60% of M_{nom} $> 60\%$ of M_{nom} and 100% of M_{nom} Voltage output For a max. torque in the range: between 0% of M_{nom} and 20% of M_{nom} $> 20\%$ of M_{nom} and 60% of M_{nom} $> 60\%$ of M_{nom} and 100% of M_{nom} Relative standard deviation of the repeatability , per DIN 1319, related to the variation of the output signal Frequency output Voltage output	%	< ± 0.01		< ± 0.02		< ± 0.03		< ± 0.01		< ± 0.02	< ± 0.03						
%	< ± 0.01		< ± 0.02		< ± 0.03		< ± 0.03		< ± 0.03								
Temperature effect per 10 K in the nominal (rated) temperature range on the output signal, related to the actual value of the signal span Frequency output Voltage output on the zero signal, related to the nominal (rated) sensitivity Frequency output Voltage output	%	± 0.1	± 0.4	± 0.05		± 0.2		± 0.05		± 0.1							
%	± 0.1	± 0.05		± 0.2		± 0.05		± 0.1									
Nominal (rated) sensitivity (span between torque = zero and nominal (rated) torque) Frequency output 10 kHz / 60 kHz / 240 kHz Voltage output Sensitivity tolerance (deviation of the actual output quantity at M_{nom} from the nominal (rated) sensitivity) Frequency output Voltage output	kHz V							5/30/120 10									
Frequency output Voltage output	% %							± 0.1 ± 0.1									
Output signal at torque = zero Frequency output Voltage output	kHz V							10/60/240 0									
Nominal (rated) output signal Frequency output with positive nominal (rated) torque with negative nominal (rated) torque Voltage output with positive nominal (rated) torque with negative nominal (rated) torque	kHz kHz V V							15 ¹⁾ / 90 ²⁾ / 360 ³⁾ (5 V symmetrical ⁴⁾) 5 ¹⁾ / 30 ²⁾ / 120 ³⁾ (5 V symmetrical ⁴⁾) ± 10 -10									
Load resistance Frequency output Voltage output	kΩ kΩ							≥ 2 ≥ 10									
Long-term drift over 48 h at reference temperature Frequency output Voltage output	% %	$< \pm 0.06$	$< \pm 0.03$		$< \pm 0.03$		$< \pm 0.03$		$< \pm 0.03$								
Measurement frequency range, -3 dB	kHz	1 ¹⁾ / 3 ²⁾ / 6 ³⁾															
Group delay	μs	< 400 ¹⁾ / < 220 ²⁾ / < 150 ³⁾															
Residual ripple Voltage output ⁵⁾	mV	< 40															

1) Option 5, 10 ± 5 kHz (code SU2)

2) Option 5, 60 ± 30 kHz (code DU2)

3) Option 5, 240 ± 120 kHz (code HU2)

4) RS-422 complementary signals, note termination resistance.

5) Signal frequency range 0.1 to 10 kHz

Specifications (continued)

Nominal (rated) torque M_{nom}	N·m	50	100	200	500					
	kN·m					1	2	3	5	10
Maximum modulation range⁶⁾		2.5 to 17.5 ¹⁾ / 15 to 105 ²⁾ / 60 to 420 ³⁾ -12 to +12								
Frequency output	kHz									
Voltage output	V									
Energy supply										
Nominal (rated) supply voltage (separated extra-low DC voltage)	V	18 to 30								
Current consumption in measuring mode	A	< 1								
Current consumption in startup mode	A	< 4 (typ. 2) 50 µs								
Nominal (rated) power consumption	W	< 10								
Maximum cable length	m	50								
Shunt signal		approx. 50% of M_{nom}								
Tolerance of the shunt signal, related to M_{nom}	%	<± 0.05								
Nominal (rated) trigger voltage	V	5								
Trigger voltage limit	V	36								
Shunt signal ON	V	min. >2.5								
Shunt signal OFF	V	max. <0.7								
Rotational speed measuring system										
Measurement system		Magnetic, via AMR sensor (Anisotropic Resistive Effect) and magnetized plastic ring with embedded steel ring								
Magnetic poles		72 86 108 126 156								
Maximum positional variation of the poles		50 angular seconds								
Output signal	V	5 V symmetrical (RS-422); 2 square wave signals approx. 90° phase shifted								
Pulses per revolution		1024								
Min. rotational speed for sufficient pulse stability	rpm	0								
Pulse tolerance⁷⁾	degrees	<± 0.05								
Maximum permissible output frequency	kHz	420								
Group delay	µs	<150								
Radial nominal (rated) distance between sensor head and magnetic ring (mechanical distance)	mm	1.6								
Working distance range between sensor head and magnetic ring	mm	0.4 to 2.5								
Max. permissible axial displacement of the rotor to the stator⁸⁾	mm	± 1.5								
Hysteresis of direction of rotation reversal in the case of relative vibrations betw. rotor and stator										
Torsional vibration of the rotor	degrees	<approx. 0.2								
Horizontal stator vibration displacement	mm	<approx. 0.5								
Magnetic load limit										
Remanent flux density	mT	>100								
Coercive field strength	kA/m	>100								
Permissible magnetic field strength for signal deviations	kA/m	<0.1								
Load resistance⁹⁾	kΩ	≥2								
Reference signal measuring system (0 index)										
Measurement system		Magnetic, with Hall sensor and magnet								
Output signal	V	5 V symmetrical (RS-422)								
Pulses per revolution		1								
Min. rotational speed for sufficient pulse stability	rpm	2								
Pulse width, approx.	degrees	0.088								
Pulse tolerance⁷⁾	degrees	<± 0.05								
Group delay	µs	<150								
Axial nominal (rated) distance between sensor head and magnetic ring (mechanical distance)	mm	2.0								
Working distance range between sensor head and magnetic ring	mm	0.4 to 2.5								
Max. permissible axial displacement of rotor to stator⁸⁾	mm	± 1.5								

6) Output signal range in which there is a repeatable correlation between torque and output signal.

7) At nominal (rated) conditions.

8) The data refers only to a central axial alignment. Deviations lead to a change in pulse tolerance.

9) Note the termination resistances as per RS-422.

Specifications (continued)

Nominal (rated) torque M_{nom}	N·m	50	100	200	500					
	kN·m					1	2	3	5	10
General information										
EMC										
Emission (per FCC 47, Part 15, subpart C) ¹⁰⁾										
Emission (per EN 61326-1, Section 7)										
RFI field strength) ¹¹⁾										
Class B										
Immunity from interference (EN 61326-1, Table 2)										
Electromagnetic field (AM)										
Magnetic field										
Electrostatic discharge (ESD)										
Contact discharge										
Air discharge										
Fast transients (burst)										
Impulse voltages (surge)										
Conducted interference (AM)										
V/m										
A/m										
10										
100										
kV										
4										
kV										
8										
kV										
1										
kV										
1										
V										
10										
Degree of protection per EN 60529										
IP 54										
Reference temperature										
°C										
23										
Nominal (rated) temperature range										
°C										
+10 to +70										
Operating temperature range ¹²⁾										
°C										
-20 to +85										
Storage temperature range										
°C										
-40 to +85										
Mechanical shock per EN 60068-2-27 ¹³⁾										
Number										
n										
1000										
Duration										
ms										
3										
Acceleration (half sine)										
m/s ²										
650										
Vibrational stress in 3 directions per EN 60068-2-6 ¹³⁾										
Frequency range										
Hz										
10 to 2000										
Duration										
h										
2.5										
Acceleration (amplitude)										
m/s ²										
200										
Load limits ¹⁴⁾										
Limit torque, related to M_{nom} ¹⁵⁾										
%										
400										
Breaking torque, related to M_{nom} ¹⁵⁾										
%										
800										
Longitudinal limit force ¹⁶⁾										
kN										
5										
Lateral limit force ¹⁶⁾										
kN										
1										
Limit bending moment ¹⁶⁾										
N·m										
50										
Oscillation width per DIN 50100 (peak-to-peak) ¹⁷⁾										
N·m										
200										
200										
400										
1000										
2000										
4000										
4800										
8000										
16000										

10) Option 7, Code U

11) Option 7, Code S

12) Heat conductance via the stator base plate necessary over 70°C. The temperature of the base plate must not exceed 85°C.

13) The antenna ring and connector plug must be fixed.

14) Each type of irregular stress (bending moment, lateral or longitudinal force, exceeding nominal (rated) torque), can only be permitted up to its specified load limit, provided none of the others can occur at the same time. If this condition is not met, the limit values must be reduced. If 30% of the limit bending moment and lateral limit force occur at the same time, only 40% of the longitudinal limit force is permissible and the nominal (rated) torque must not be exceeded. The effects of permissible bending moments, longitudinal and lateral forces on the measurement result are $\leq \pm 0.3\%$ (50 Nm: $\leq \pm 0.6\%$) of the nominal (rated) torque. The load limits only apply for the nominal (rated) temperature range. At temperatures $< 10^\circ\text{C}$, load limits are expected to reduce by up to 30%, because the strength reduction increases as the temperatures fall.

15) With a static loading.

16) Static and dynamic.

17) The nominal (rated) torque must not be exceeded.


Specifications (continued)

Nominal (rated) torque M_{nom}	N·m	50	100	200	500									
	kN·m					1	2	3	5	10				
Mechanical values														
Torsional stiffness c_T	kN·m/rad	180	180	360	745	1165	2515	3210	5565	14335				
Torsion angle at M_{nom}	degrees	0.016	0.032	0.032	0.038	0.049	0.046	0.054	0.051	0.040				
Stiffness in the axial direction c_a	kN/mm	285	285	540	450	580	540	570	760	960				
Stiffness in the radial direction c_r	kN/mm	160	160	315	560	860	1365	1680	2080	2940				
Stiffness during the bending moment round a radial axis c_b	kN·m/deg.	1.9	1.9	3.6	4.2	5.9	9	9.3	20.2	45.5				
Maximum deflection at longitudinal limit force	mm	< 0.04			< 0.05		< 0.06		< 0.08	< 0.09				
Additional max. radial deviation at lateral limit force	mm	< 0.02												
Additional plumb/parallel deviation at limit bending moment (at $\varnothing d_B$)	mm	< 0.06			< 0.11	< 0.09	< 0.18	< 0.19	< 0.14	< 0.12				
Balance quality level per DIN ISO 1940		G 2.5												
Max. limits for relative shaft vibration (peak-to-peak) ¹⁸⁾ Undulations in the connection flange area, based on ISO 7919-3														
Normal operation (continuous operation)	μm	$s_{(p-p)} = \frac{9000}{\sqrt{n}}$ (n in rpm)												
Start and stop operation/resonance ranges (temporary)	μm	$s_{(p-p)} = \frac{13200}{\sqrt{n}}$ (n in rpm)												
Mass moment of inertia of rotor J_v without rotational speed measuring system with magn. rotational speed meas. system	kg·m ²	0.0010	0.0010	0.0017	0.0039	0.0128		0.0292	0.0771					
kg·m ²	0.0015	0.0015	0.0022	0.0048	0.0145	0.0146	0.0333	0.0872						
Proportional mass moment of inertia for the transmitter side (side of the flange with external centering)	% of J_v	68	68	62	59	54		53	54					
without rotational speed measuring system with magn. rotational speed meas. system	% of J_v	44	44	48	48	48		47	48					
Max. permissible static eccentricity of the rotor (radially) to the center point of the stator without rotational speed measuring system	mm	± 2												
Permissible axial displacement between rotor and stator ¹⁹⁾ without rotational speed measuring system	mm	± 2												
Weight Rotor without rotational speed measuring system Rotor with magn. rotational speed meas. system Stator	kg	0.7	0.7	1.1	1.9	3.8	3.9	6.5	10.9					
	kg	0.8	0.8	1.3	2.1	4.1	4.1	6.9	11.7					
	kg	1.1	1.1	1.1	1.1	1.1	1.1	1.2	1.3					

¹⁸⁾ The influence of radial deviations, impact, defects of form, notches, marks, local residual magnetism, structural variations or material anomalies on the vibrational measurements needs to be taken into account and isolated from the actual undulation.

¹⁹⁾ Above the nominal (rated) temperature range: ±1.5 mm.


Radial and axial run-out tolerances

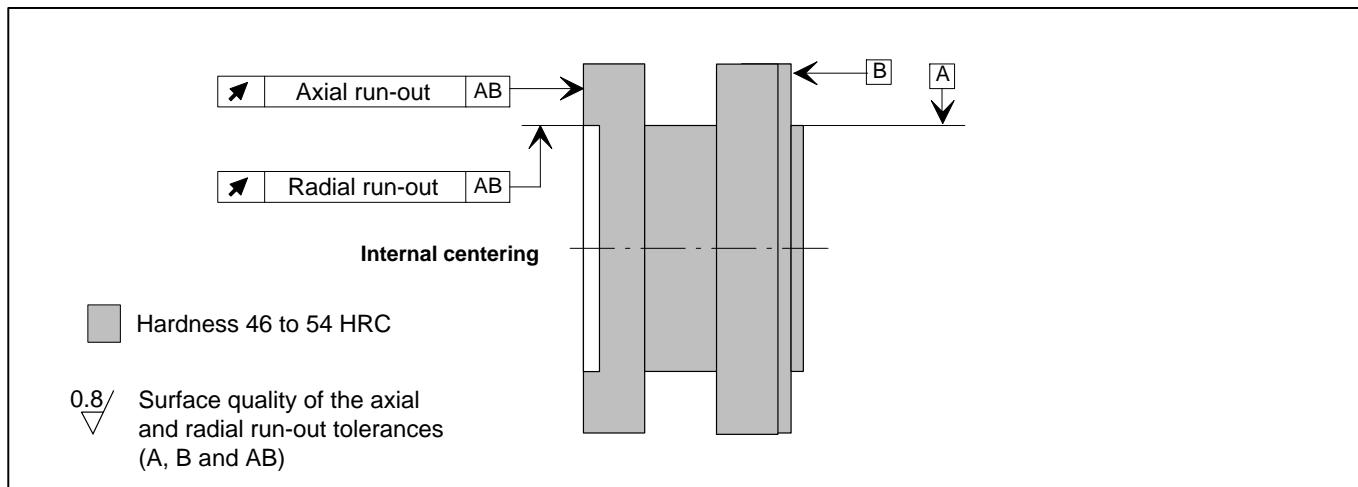

Measuring range (N·m)	Axial runout tolerance (mm)	Radial run-out tolerance (mm)
50	0.01	0.01
100	0.01	0.01
200	0.01	0.01
500	0.01	0.01
1 k	0.01	0.01
2 k	0.02	0.02
3 k	0.02	0.02
5 k	0.02	0.02
10 k	0.02	0.02


**Dimensions of T40B/50 Nm and 100 Nm without rotational speed measurement, Option 7,
Code S**

Dimensions in mm (1 mm = 0.03937 inches)

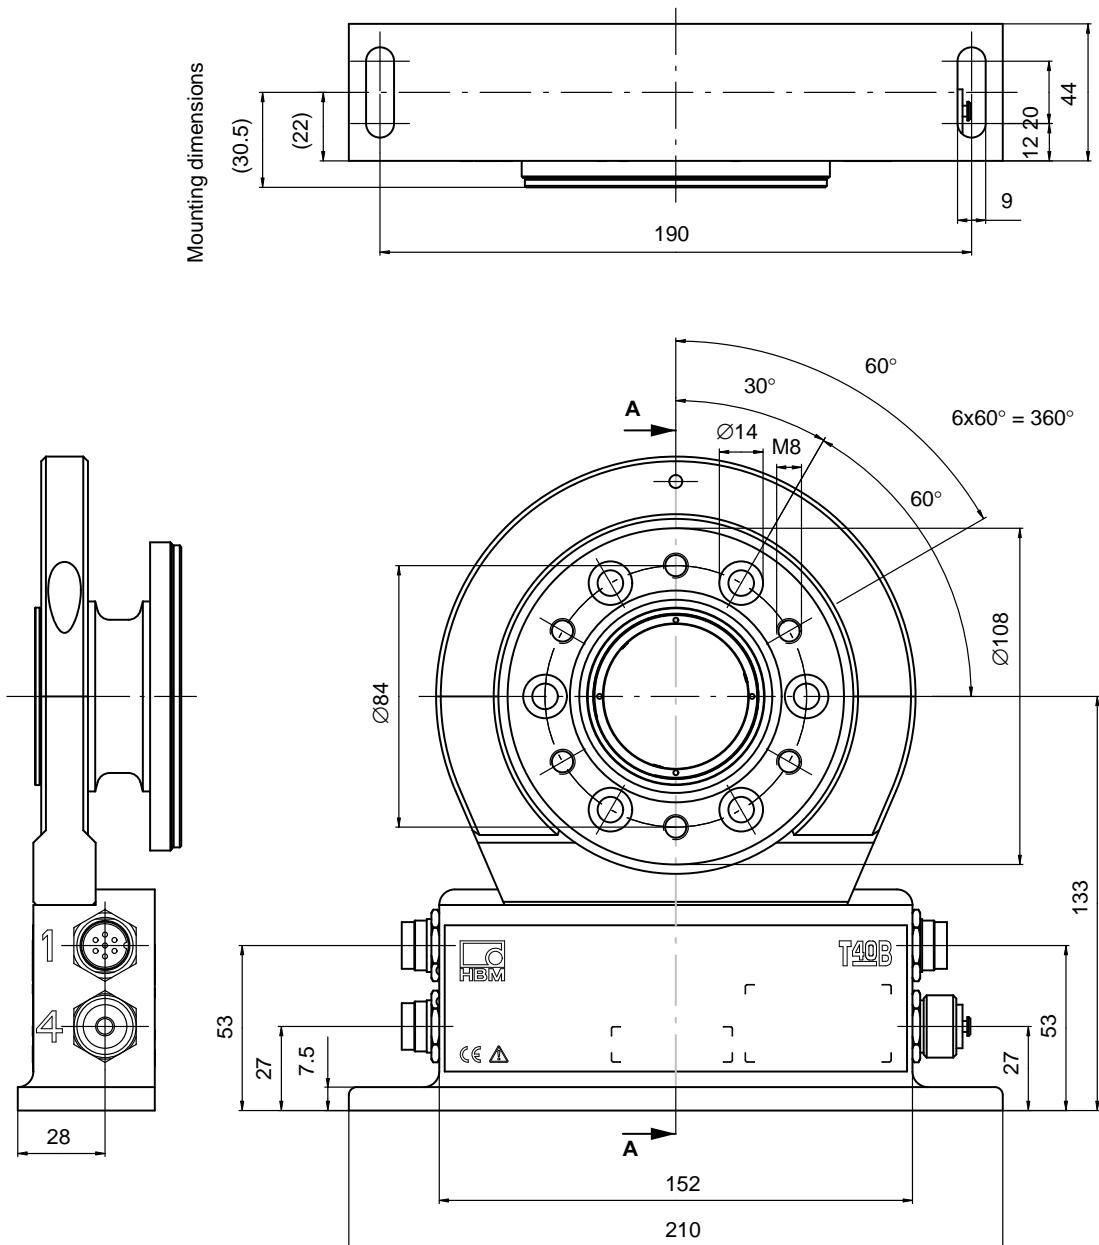


Dimensions of T40B/50 Nm and 100 Nm without rotational speed measurement, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)

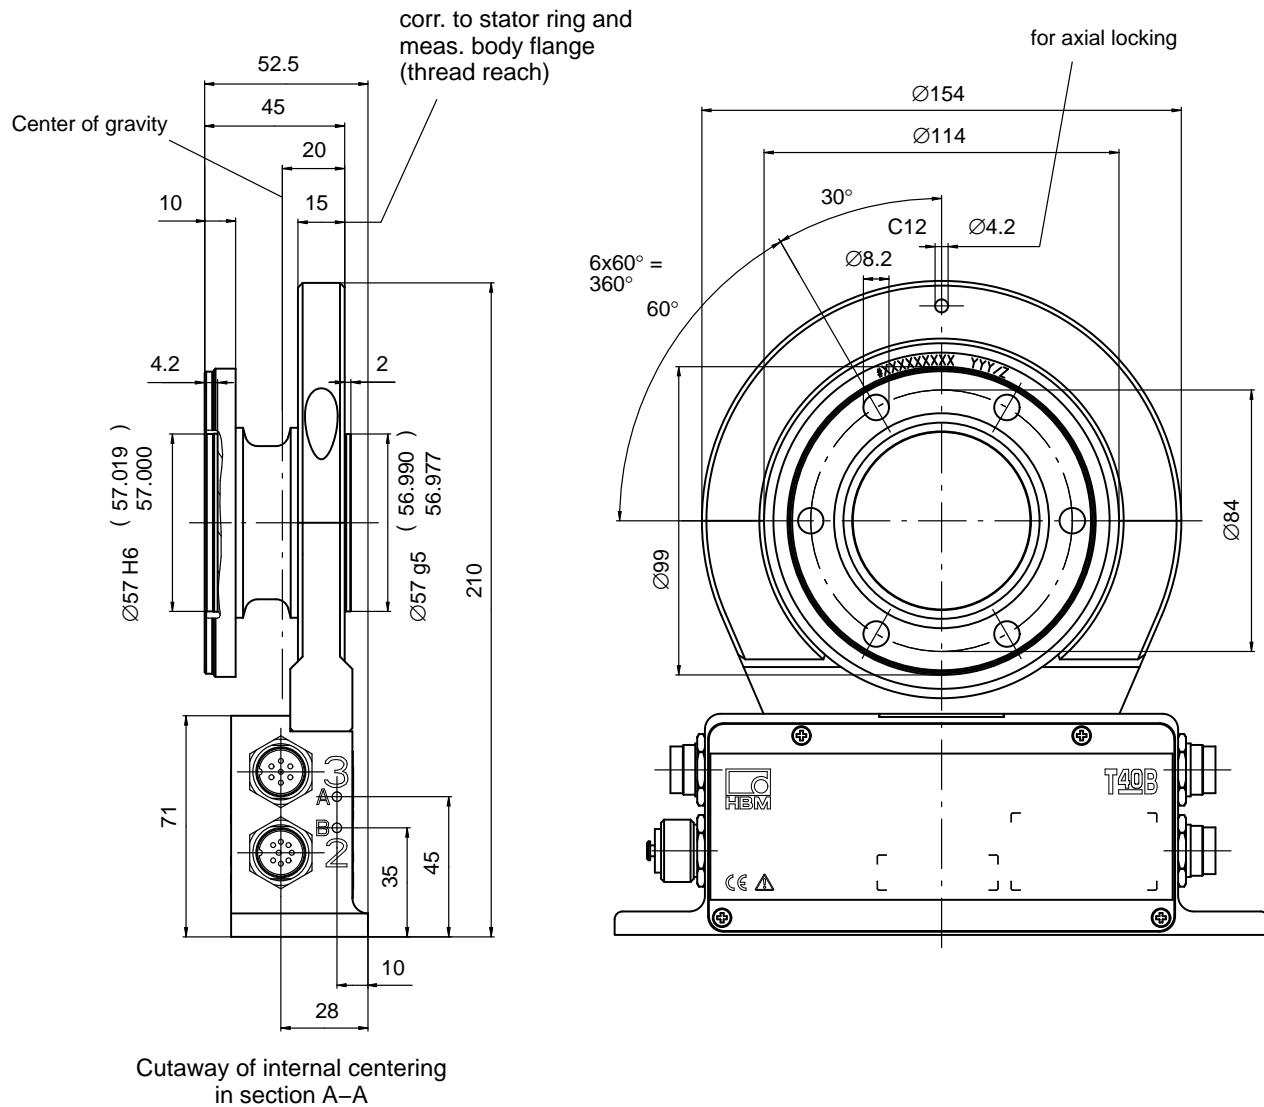

Dimensions of T40B/50 Nm and 100 Nm without rotational speed measurement, Option 7 Code U


Screw head height (Shielding plates) = 2.5 mm

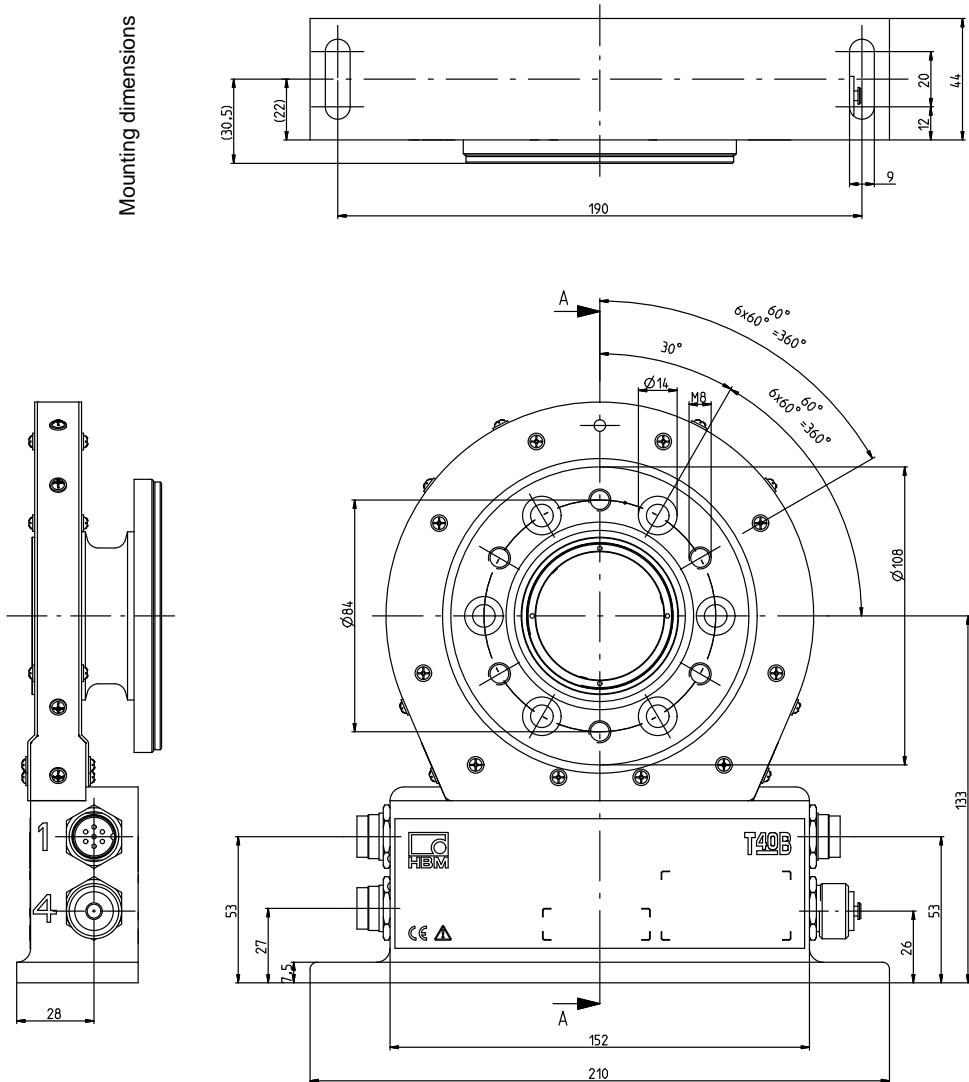

**Dimensions of T40B/50 Nm and 100 Nm without rotational speed measurement, Option 7
Code U, continued**

Dimensions in mm (1 mm = 0.03937 inches)


Screw head height (Shielding plates) = 2.5 mm

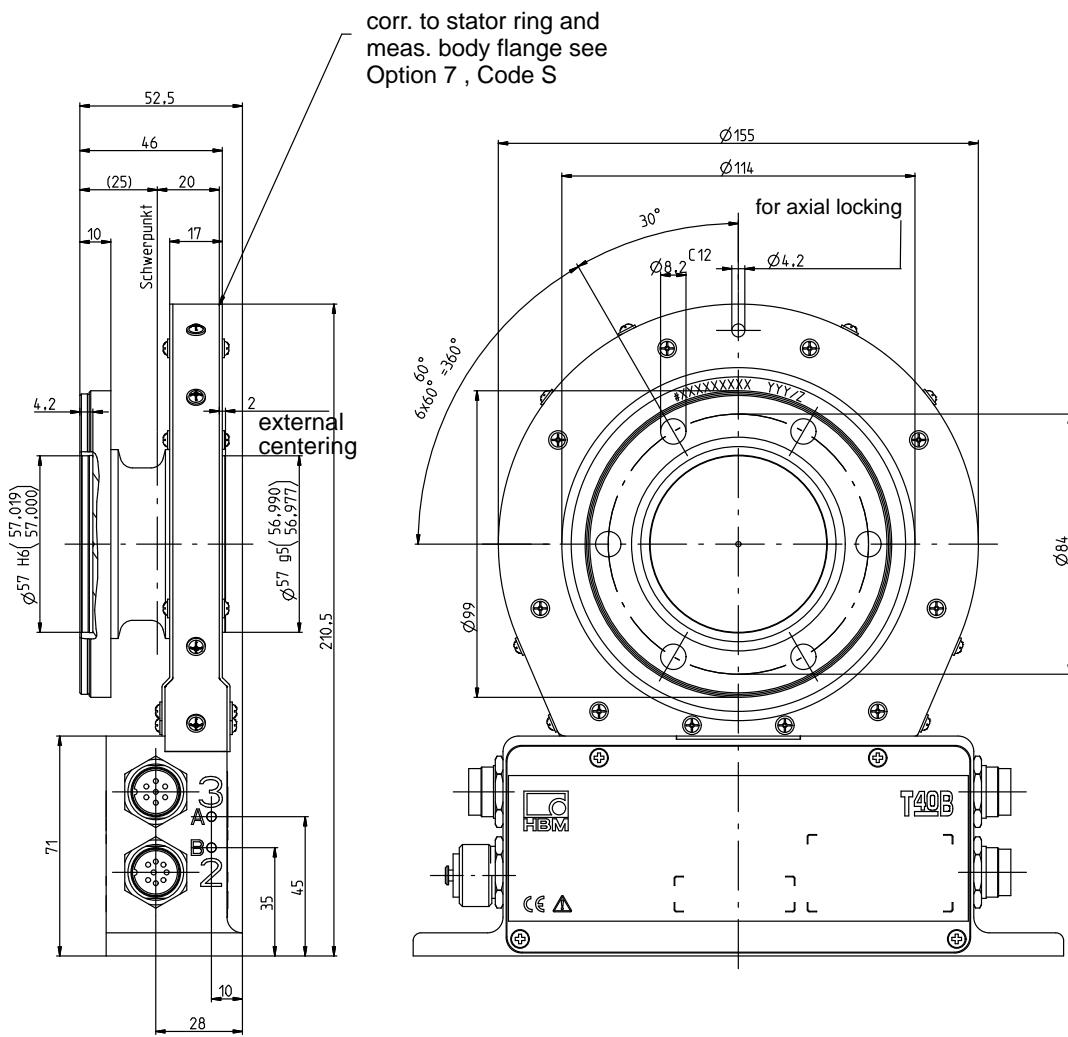

Cutaway of internal centering
in section A-A


Dimensions of T40B/200 Nm without rotational speed measurement, Option 7 Code S

Dimensions in mm (1 mm = 0.03937 inches)

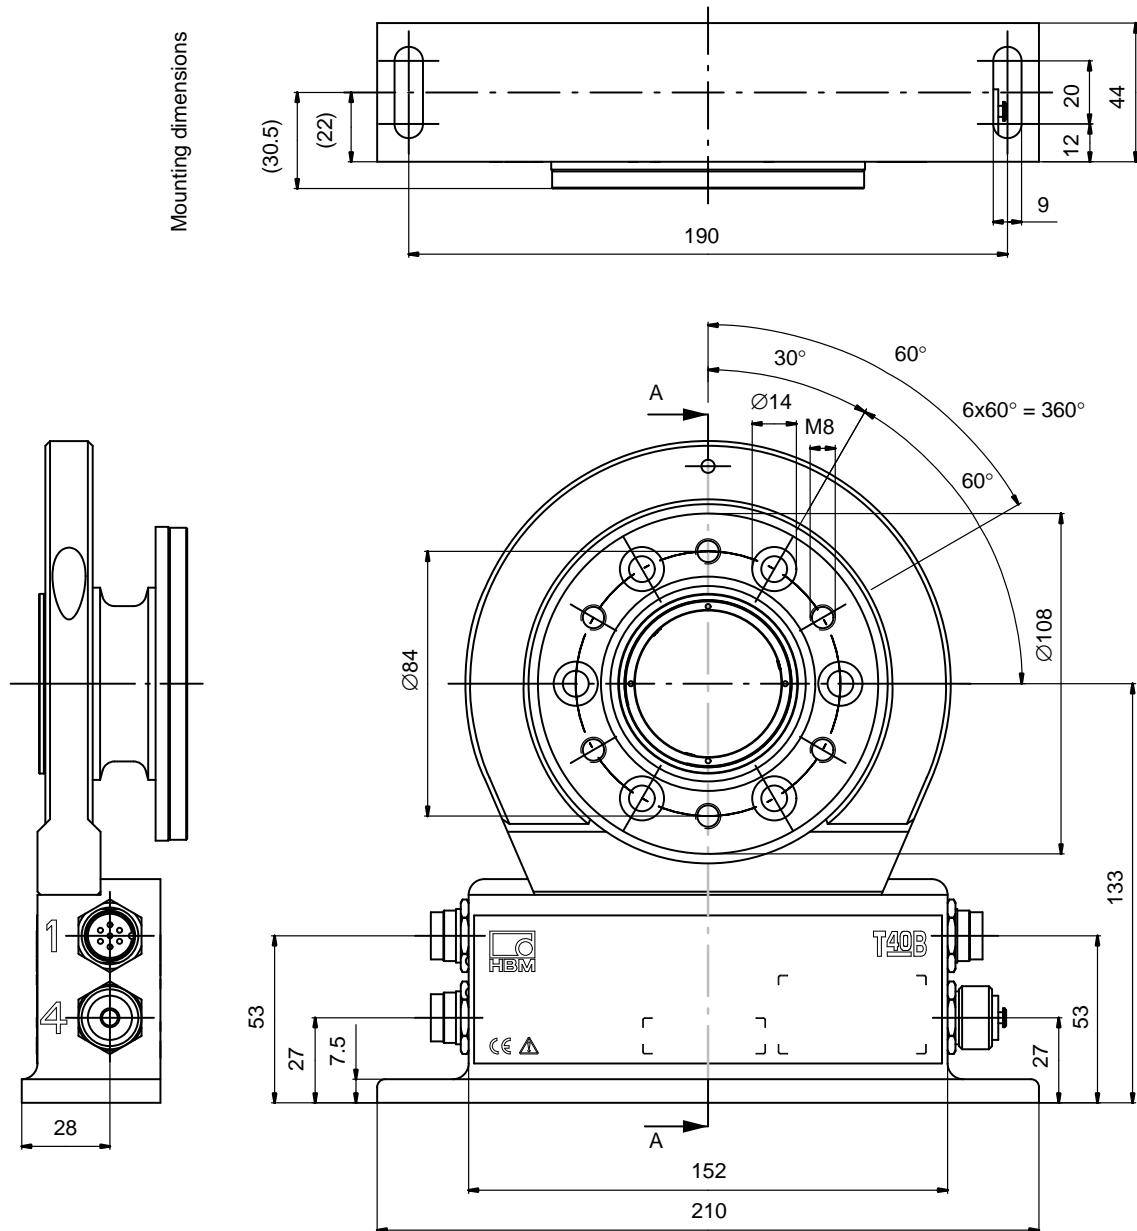

Dimensions of T40B/200 Nm without rotational speed measurement, Option 7 Code S
continued

Dimensions in mm (1 mm = 0.03937 inches)



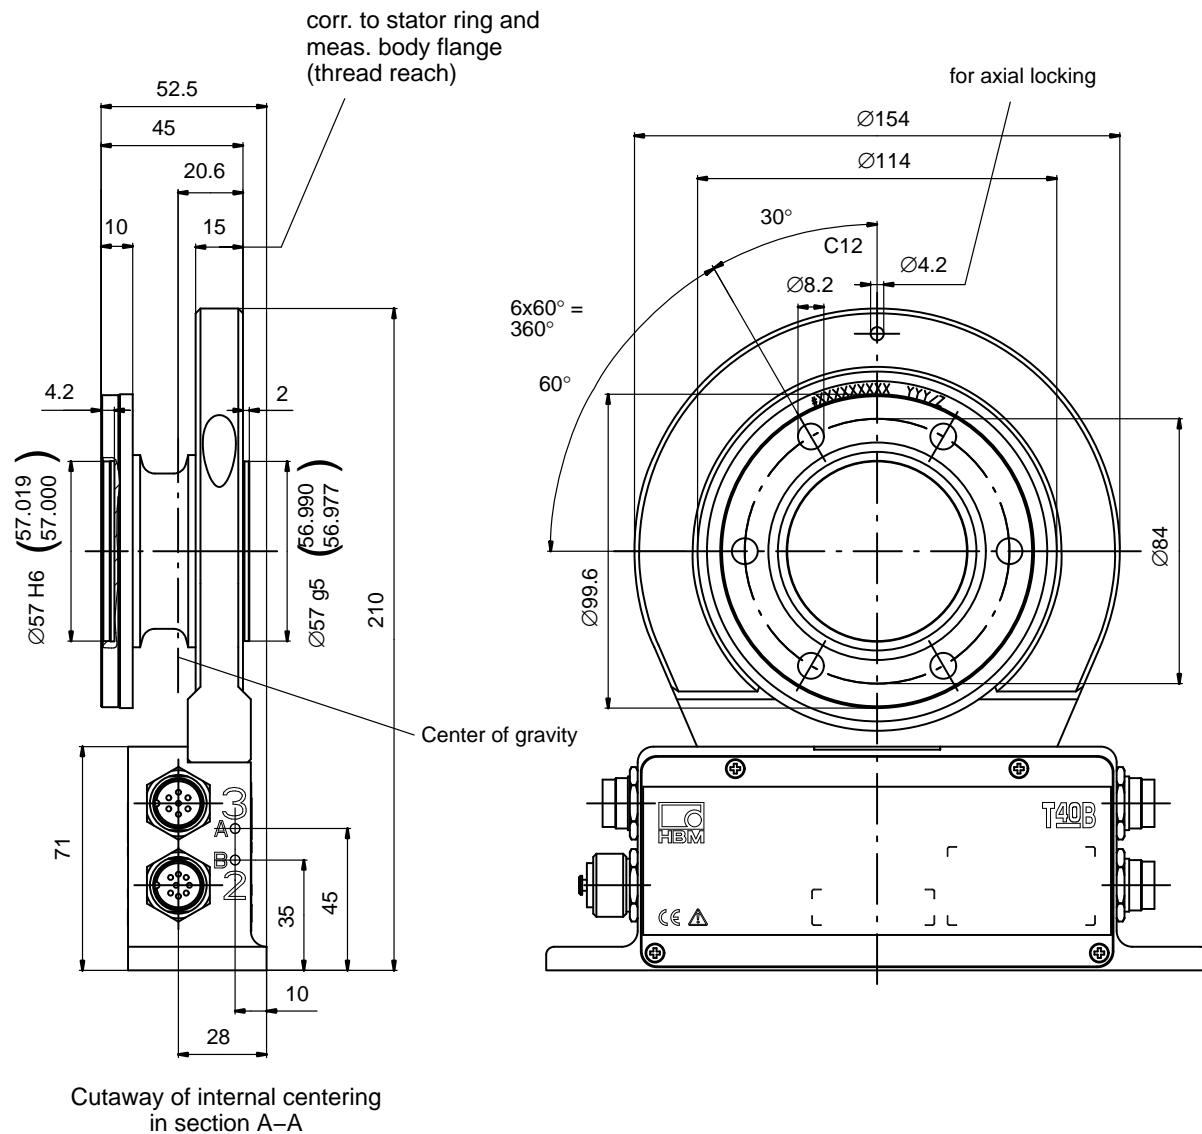


Dimensions of T40B/200 Nm without rotational speed measurement, Option 7, Code U

Dimensions in mm (1 mm = 0.03937 inches)


Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

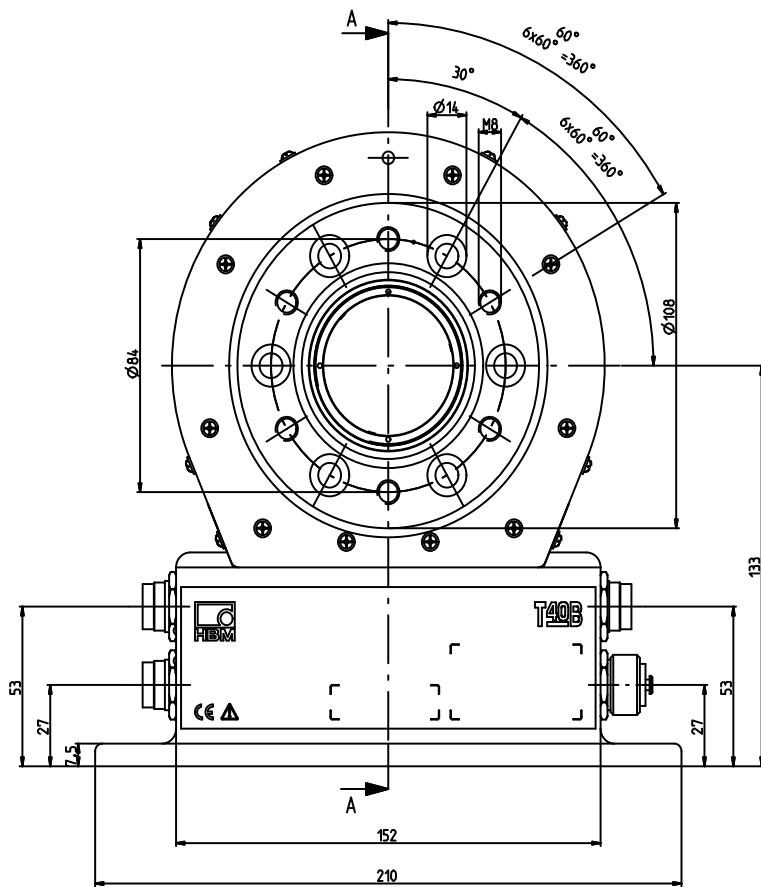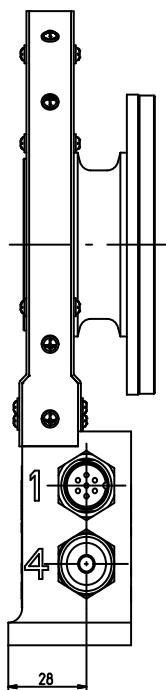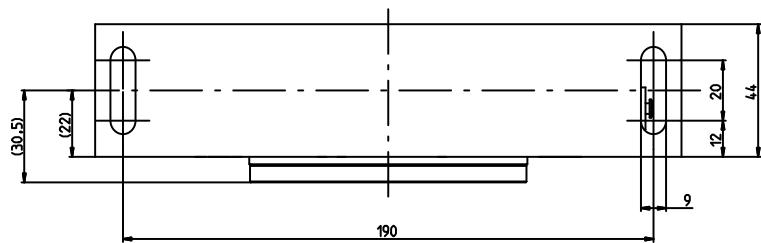

**Dimensions of T40B/200 Nm without rotational speed measurement, Option 7, Code U,
continued**

Dimensions in mm (1 mm = 0.03937 inches) **Screw head height (Shielding plates) = 2.5 mm**



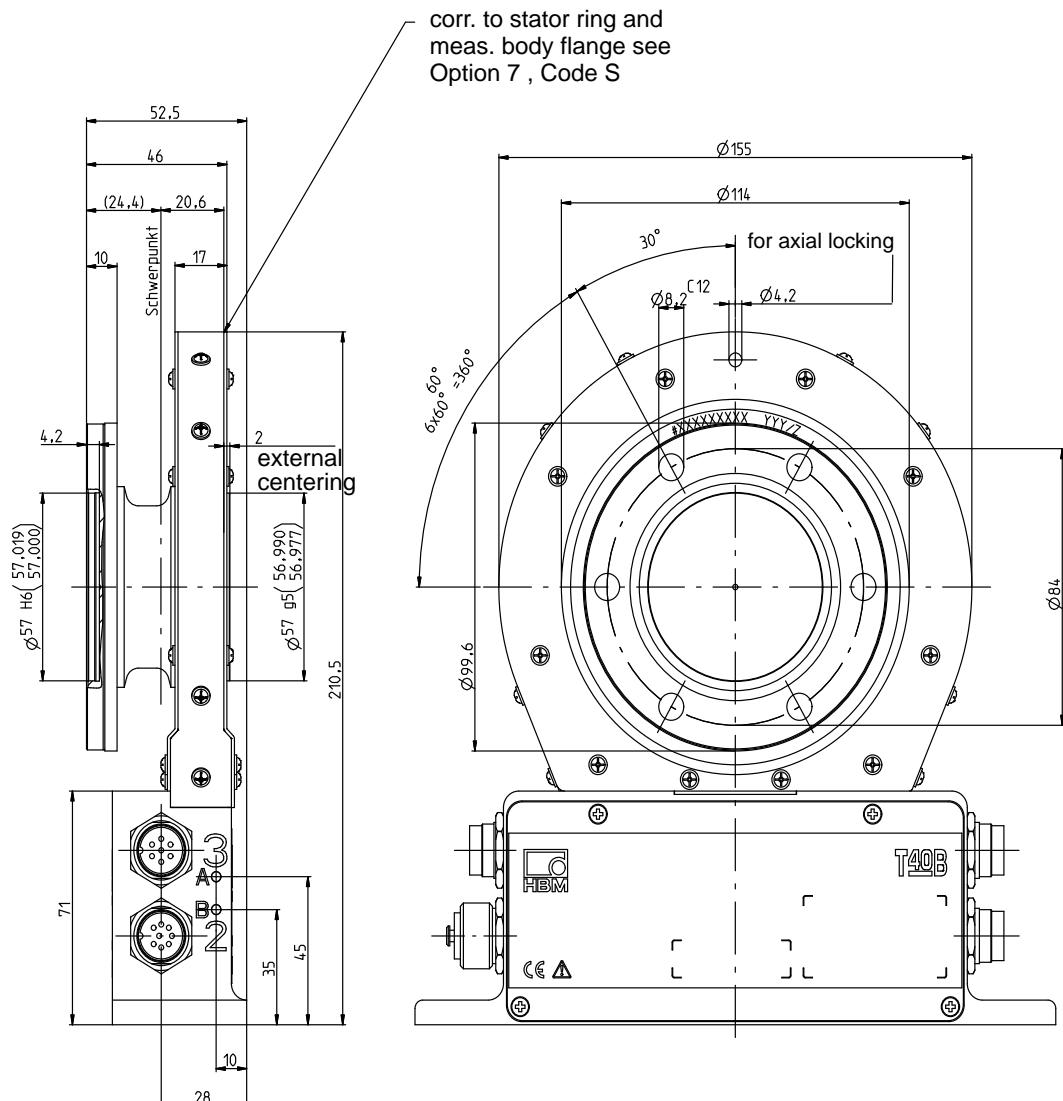


Cutaway of internal centering
in section A-A

Dimensions of T40B/500 Nm and 1 kNm without rotational speed measurement, Option 7, Code S


Dimensions in mm (1 mm = 0.03937 inches)

Mounting dimensions

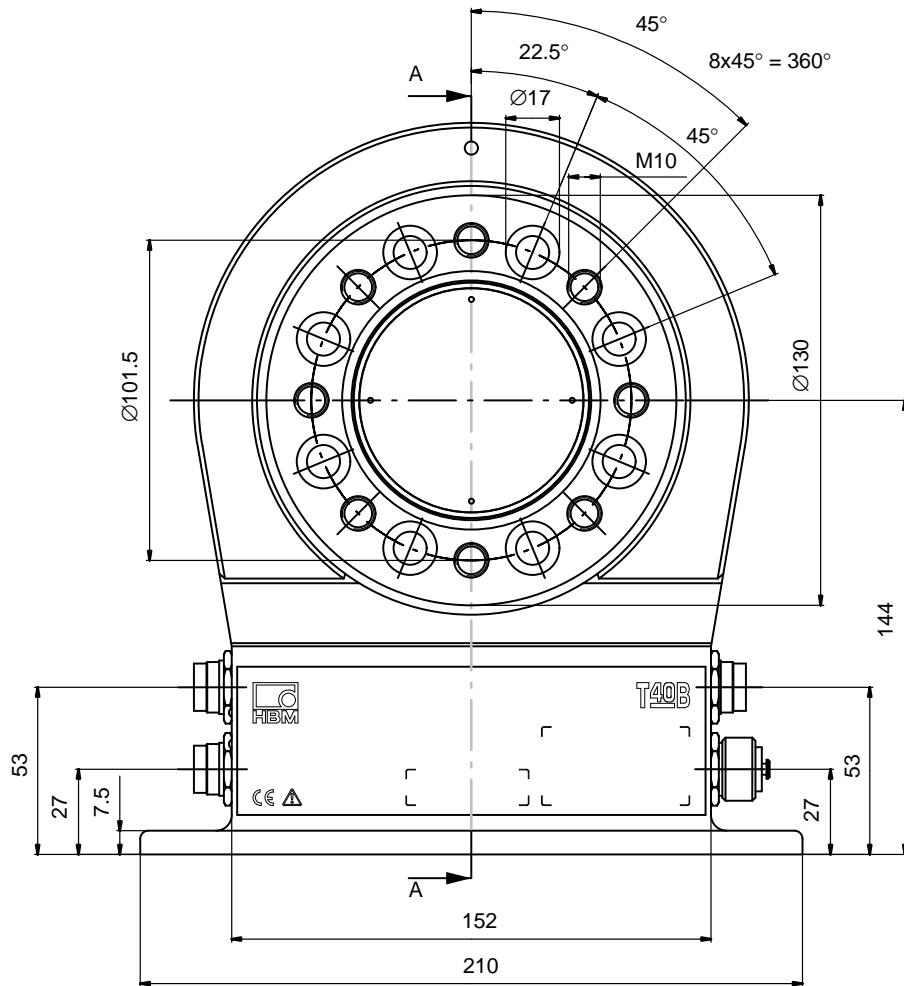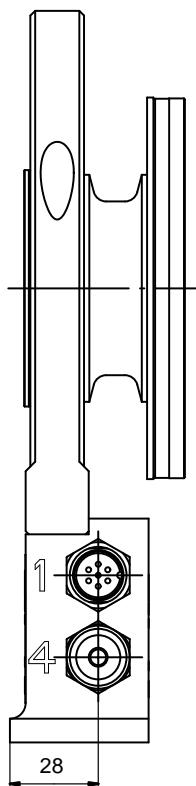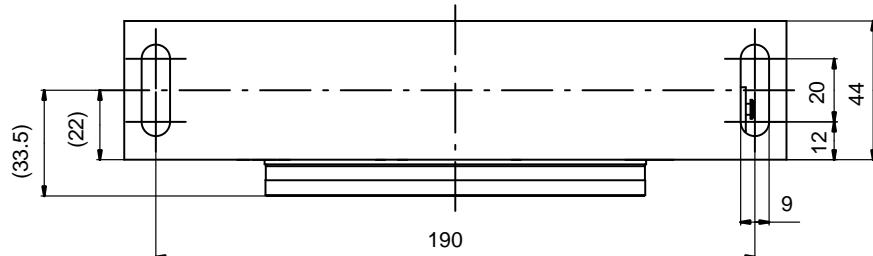

Dimensions of T40B/500 Nm and 1 kNm without rotational speed measurement, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)



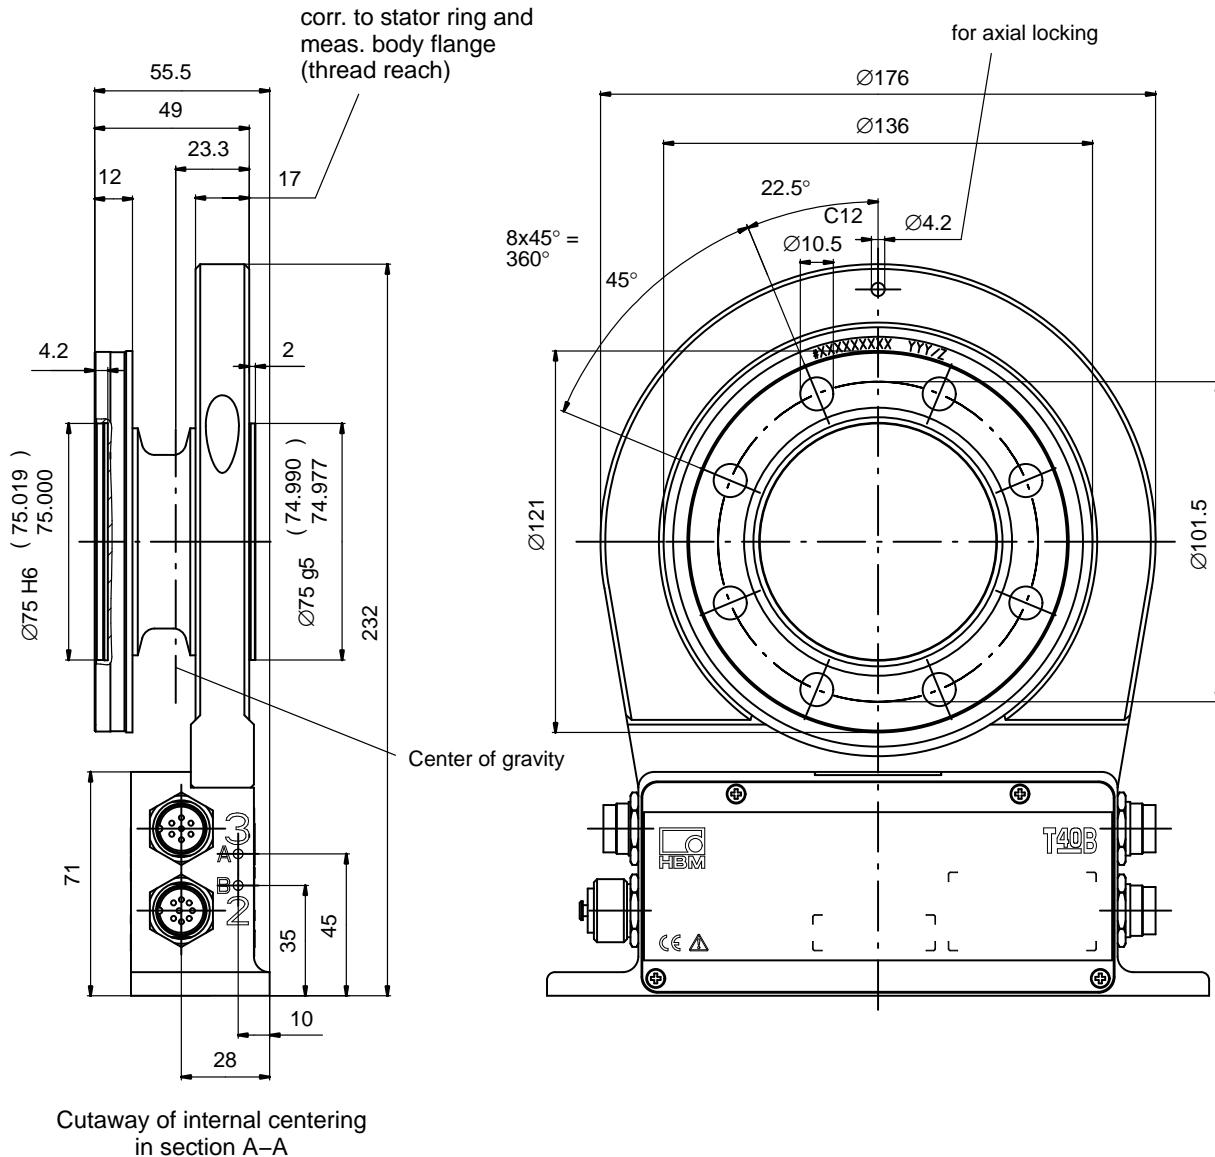


Dimensions of T40B/500 Nm and 1 kNm without rotational speed measurement, Option 7, Code U

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm



Mounting dimensions

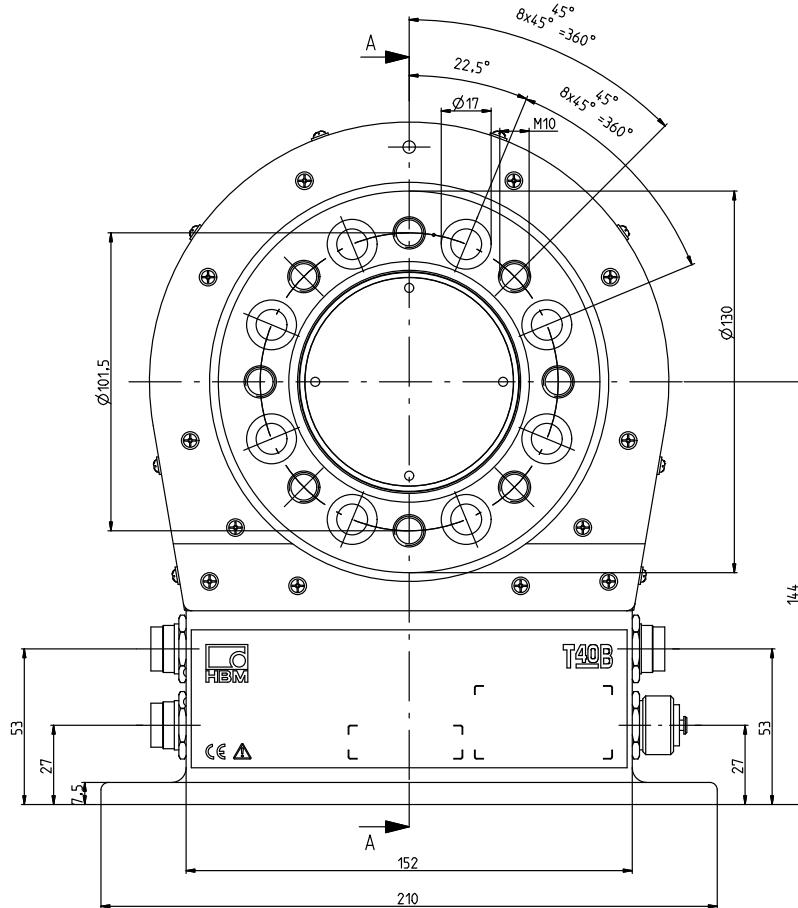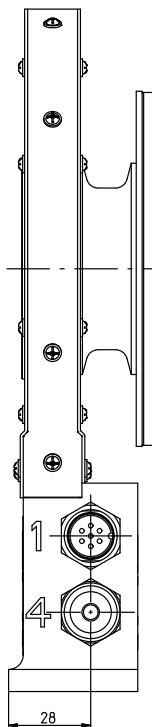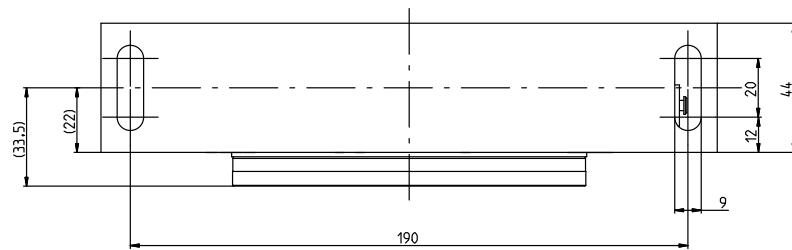

Dimensions of T40B/500 Nm and 1 kNm without rotational speed measurement, Option 7, Code U, continued

Dimensions in mm (1 mm = 0.03937 inches) **Screw head height (Shielding plates) = 2.5 mm**


corr. to stator ring and
meas. body flange see
Option 7 , Code S

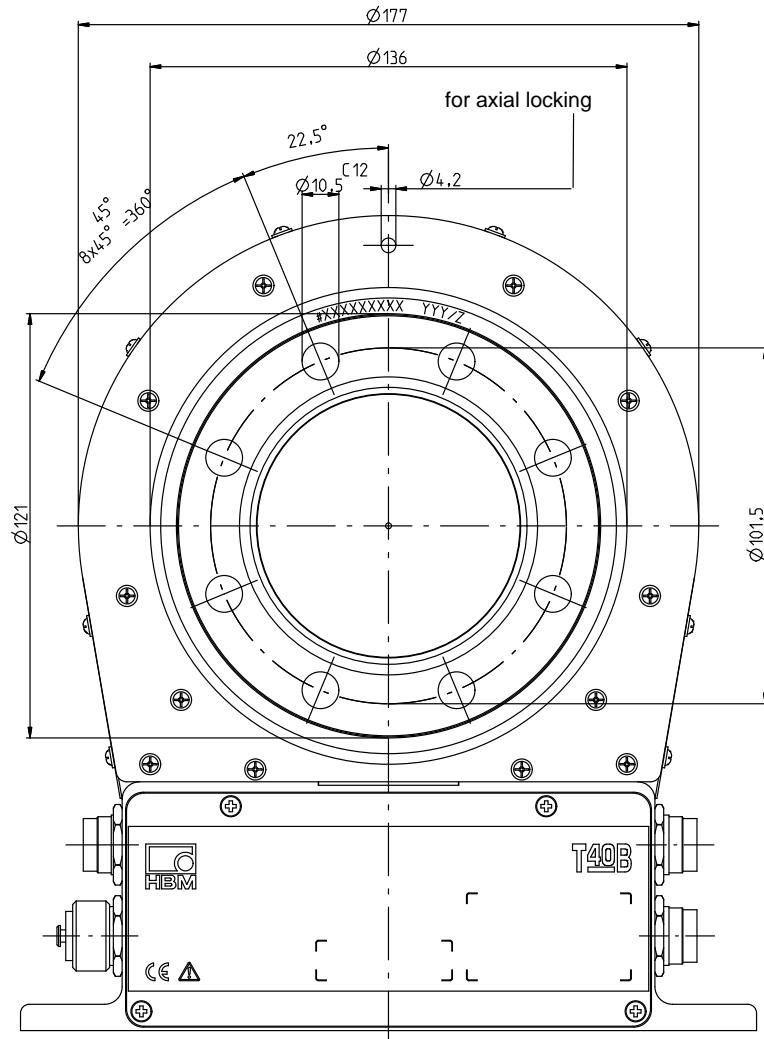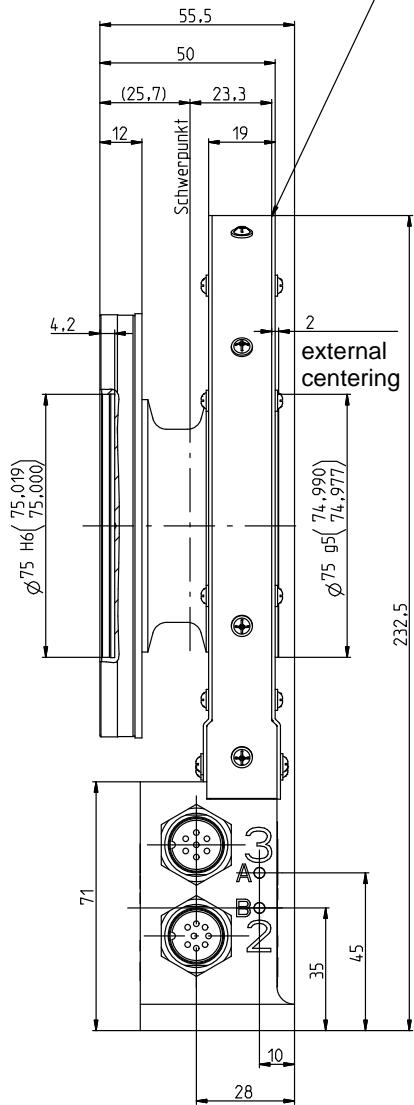

Cutaway of internal centering
in section A-A


**Dimensions of T40B/2 kNm and 3 kNm without rotational speed measurement, Option 7,
Code S**

Dimensions in mm (1 mm = 0.03937 inches)

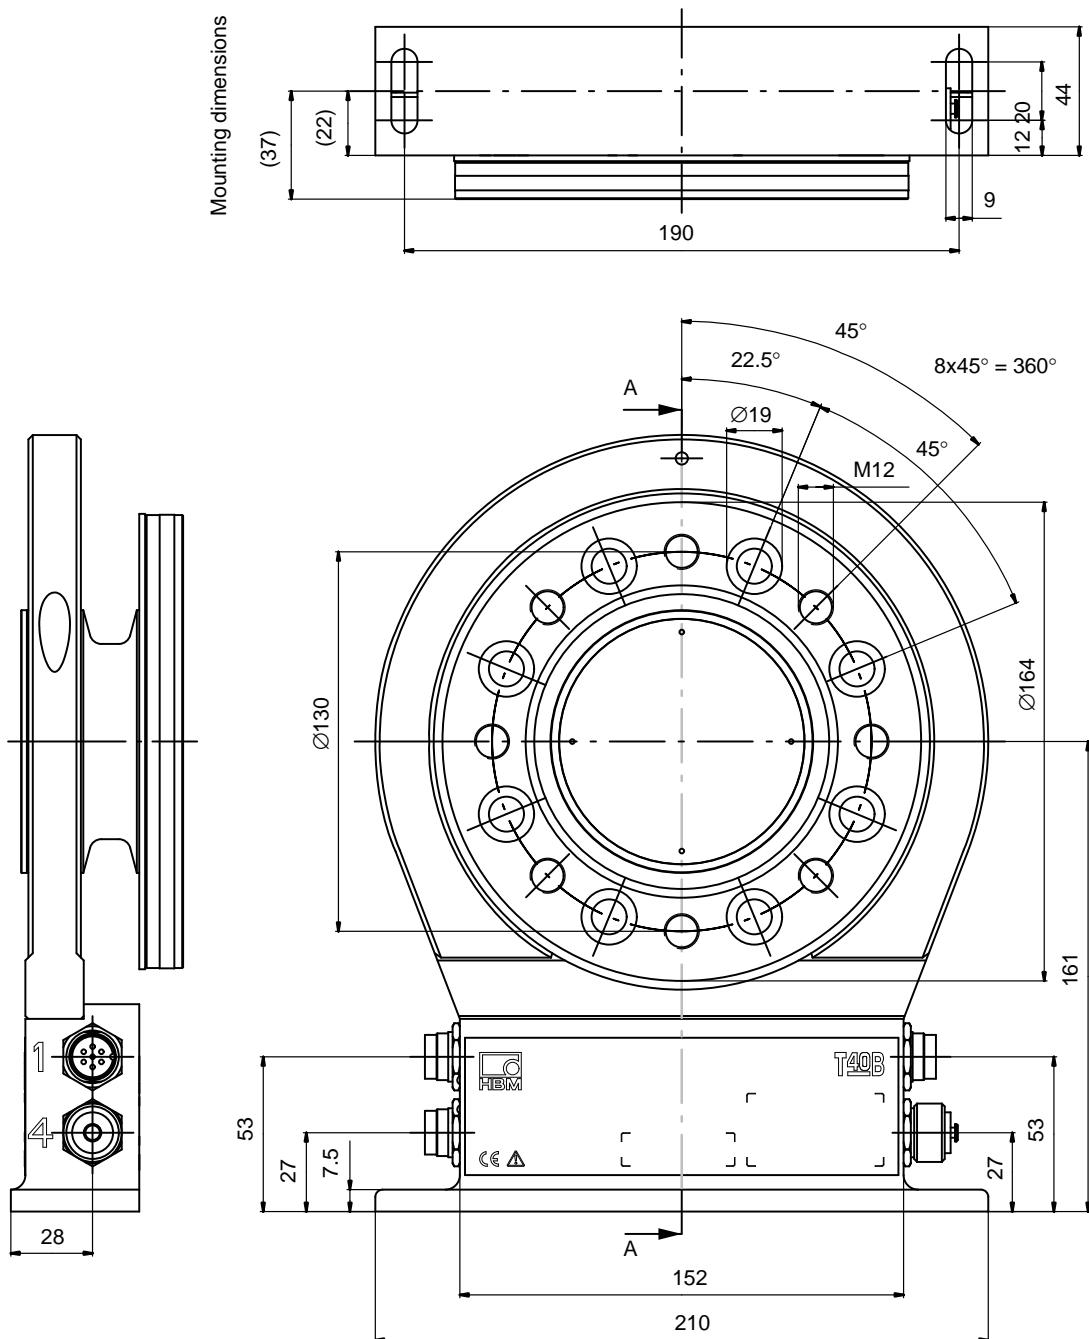

Dimensions of T40B/2 kNm and 3 kNm without rotational speed measurement, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)


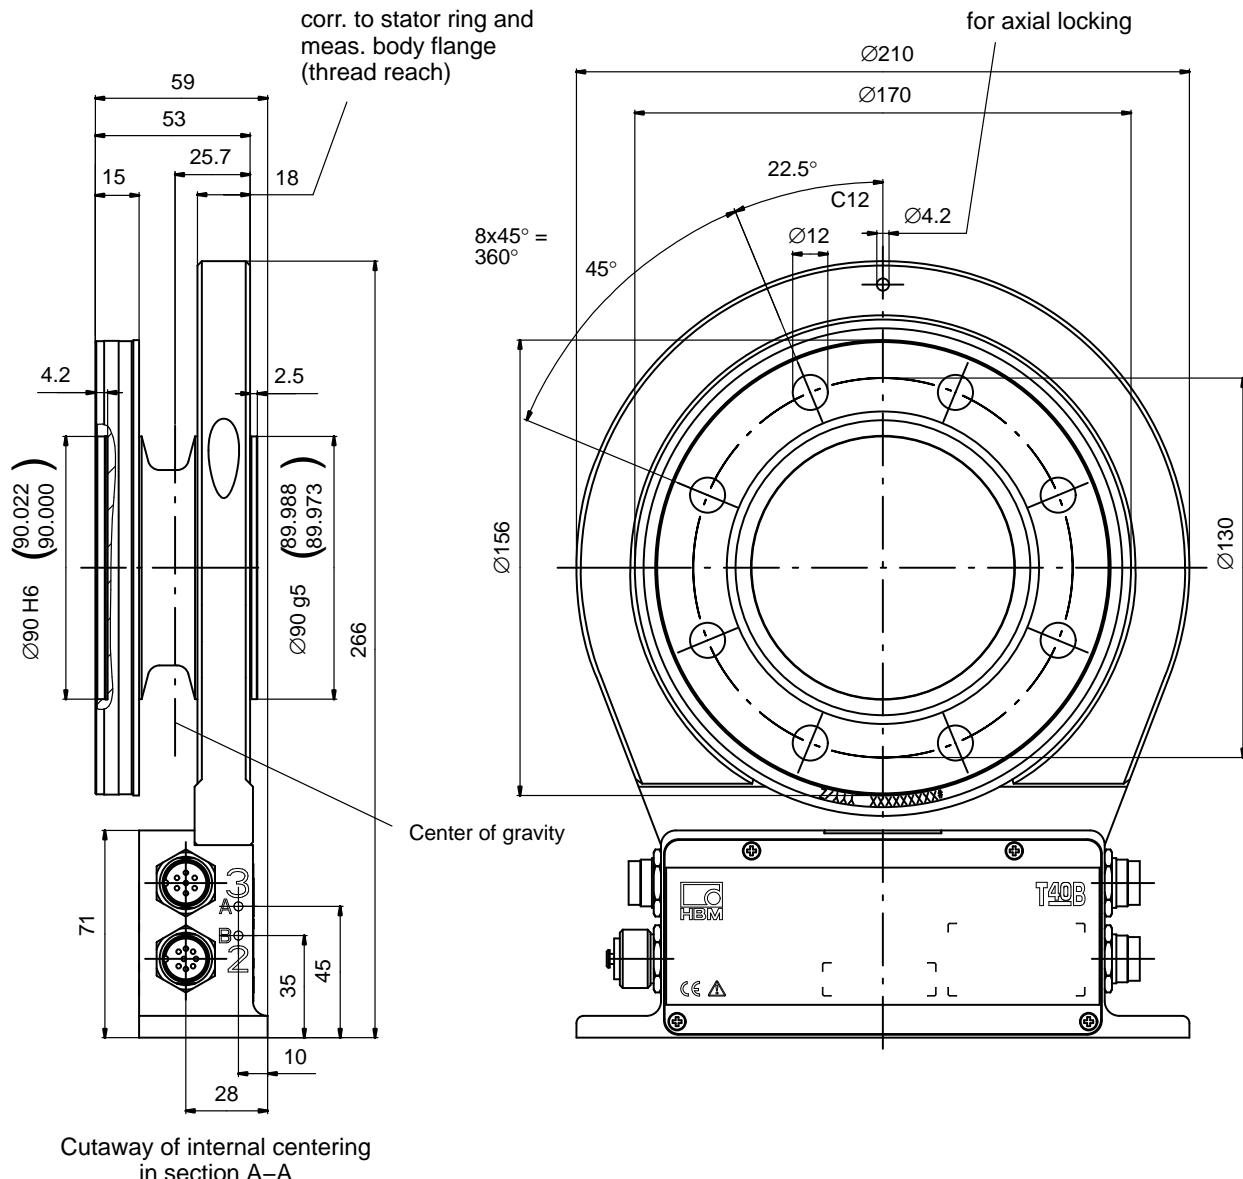


**Dimensions of T40B/2 kNm and 3 kNm without rotational speed measurement, Option 7,
Code U**

Dimensions in mm (1 mm = 0.03937 inches)


Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

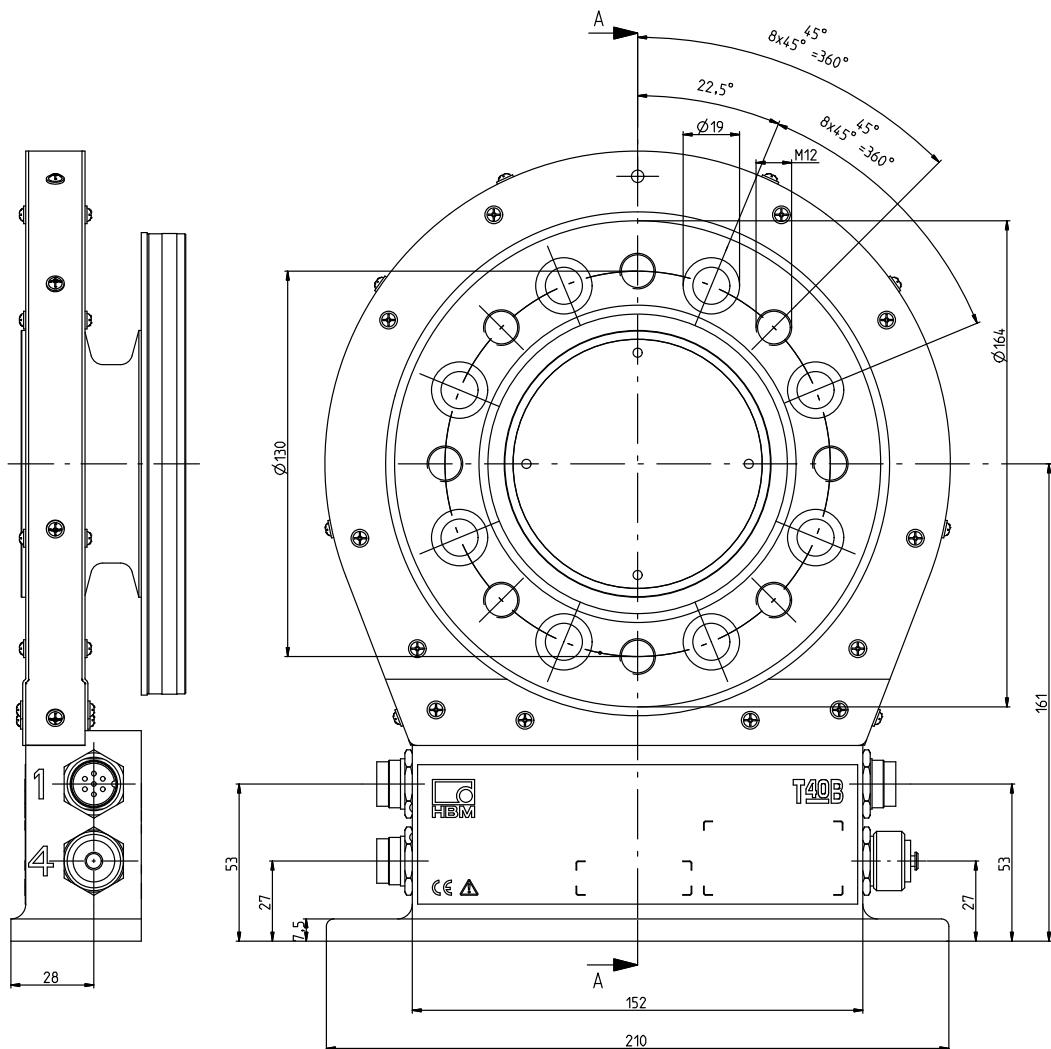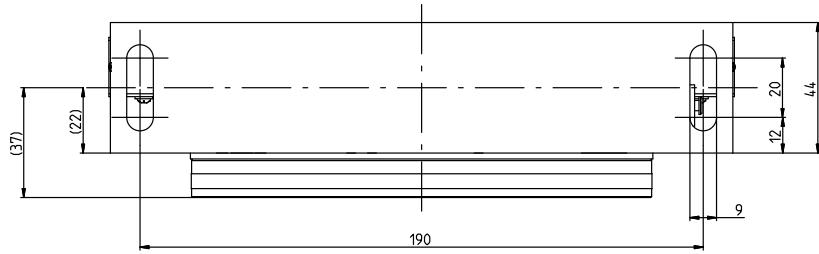

Dimensions of T40B/2 kNm and 3 kNm without rotational speed measurement, Option 7, Code U, continued


Dimensions in mm (1 mm = 0.03937 inches) **Screw head height (Shielding plates) = 2.5 mm**

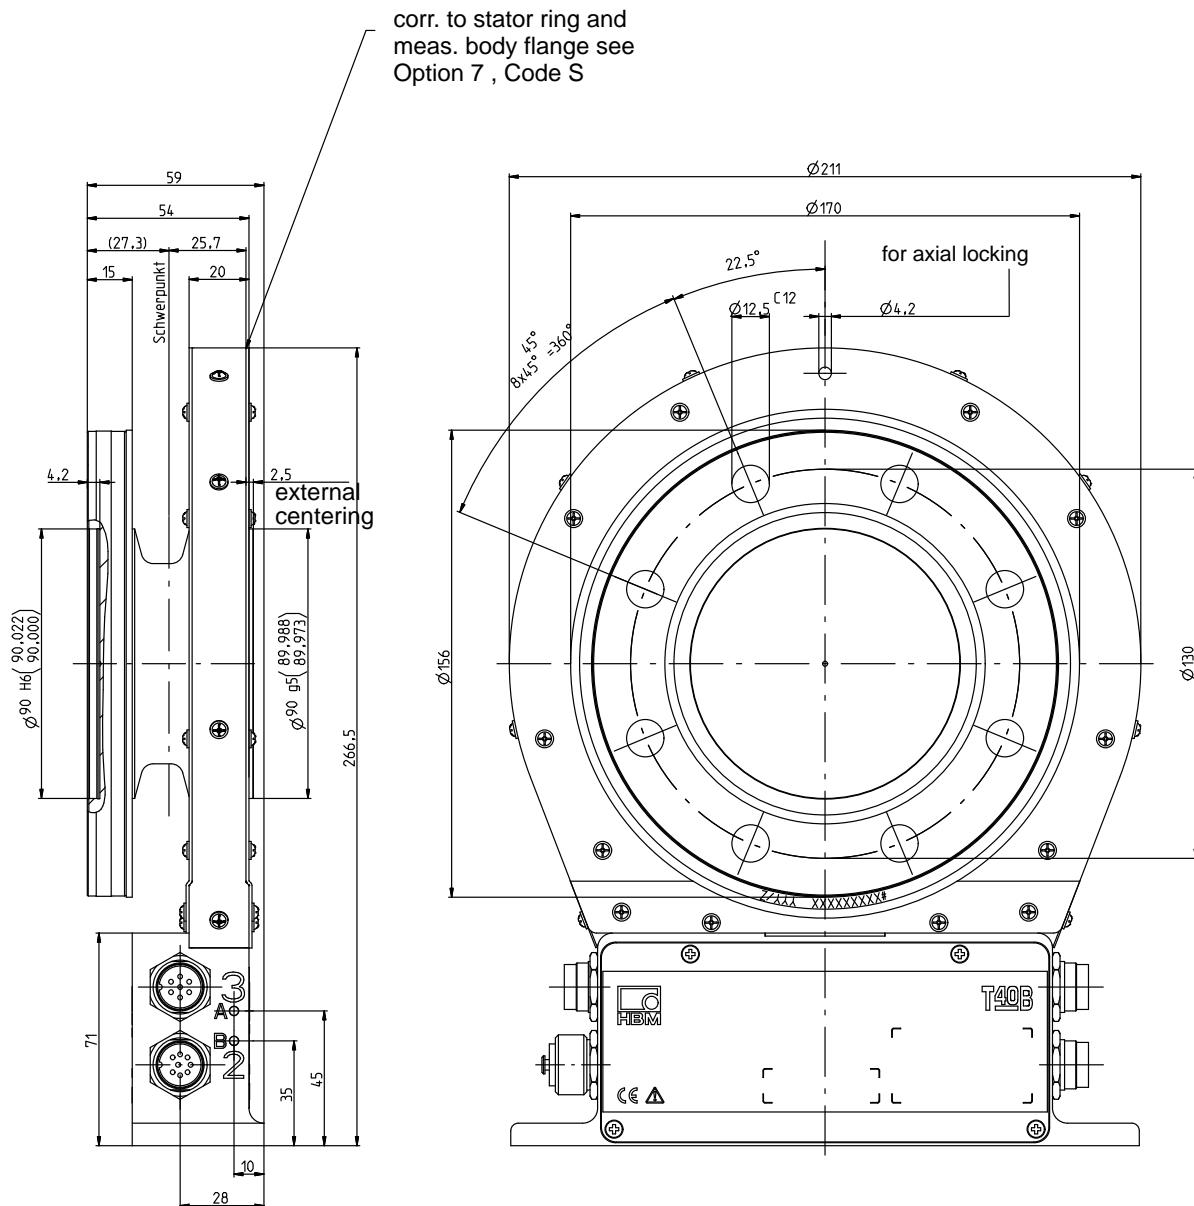

Cutaway of internal centering
in section A-A


Dimensions of T40B/5 kNm without rotational speed measurement, Option 7, Code S

Dimensions in mm (1 mm = 0.03937 inches)

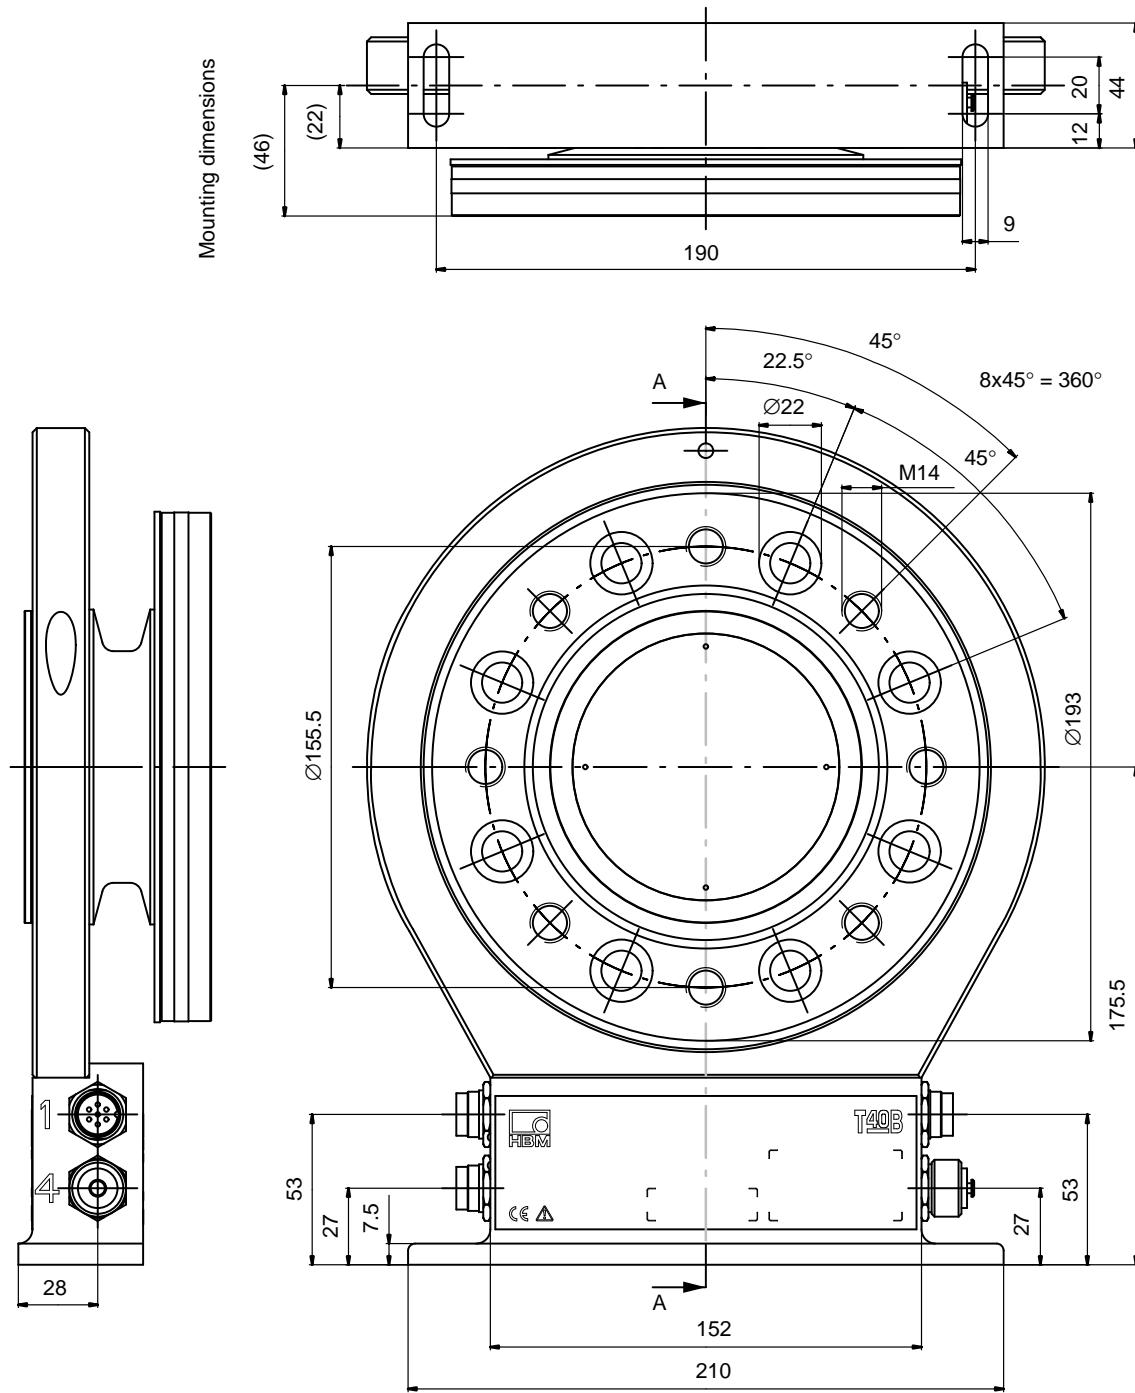

**Dimensions of T40B/5 kNm without rotational speed measurement, Option 7, Code S,
continued**


Dimensions in mm (1 mm = 0.03937 inches)

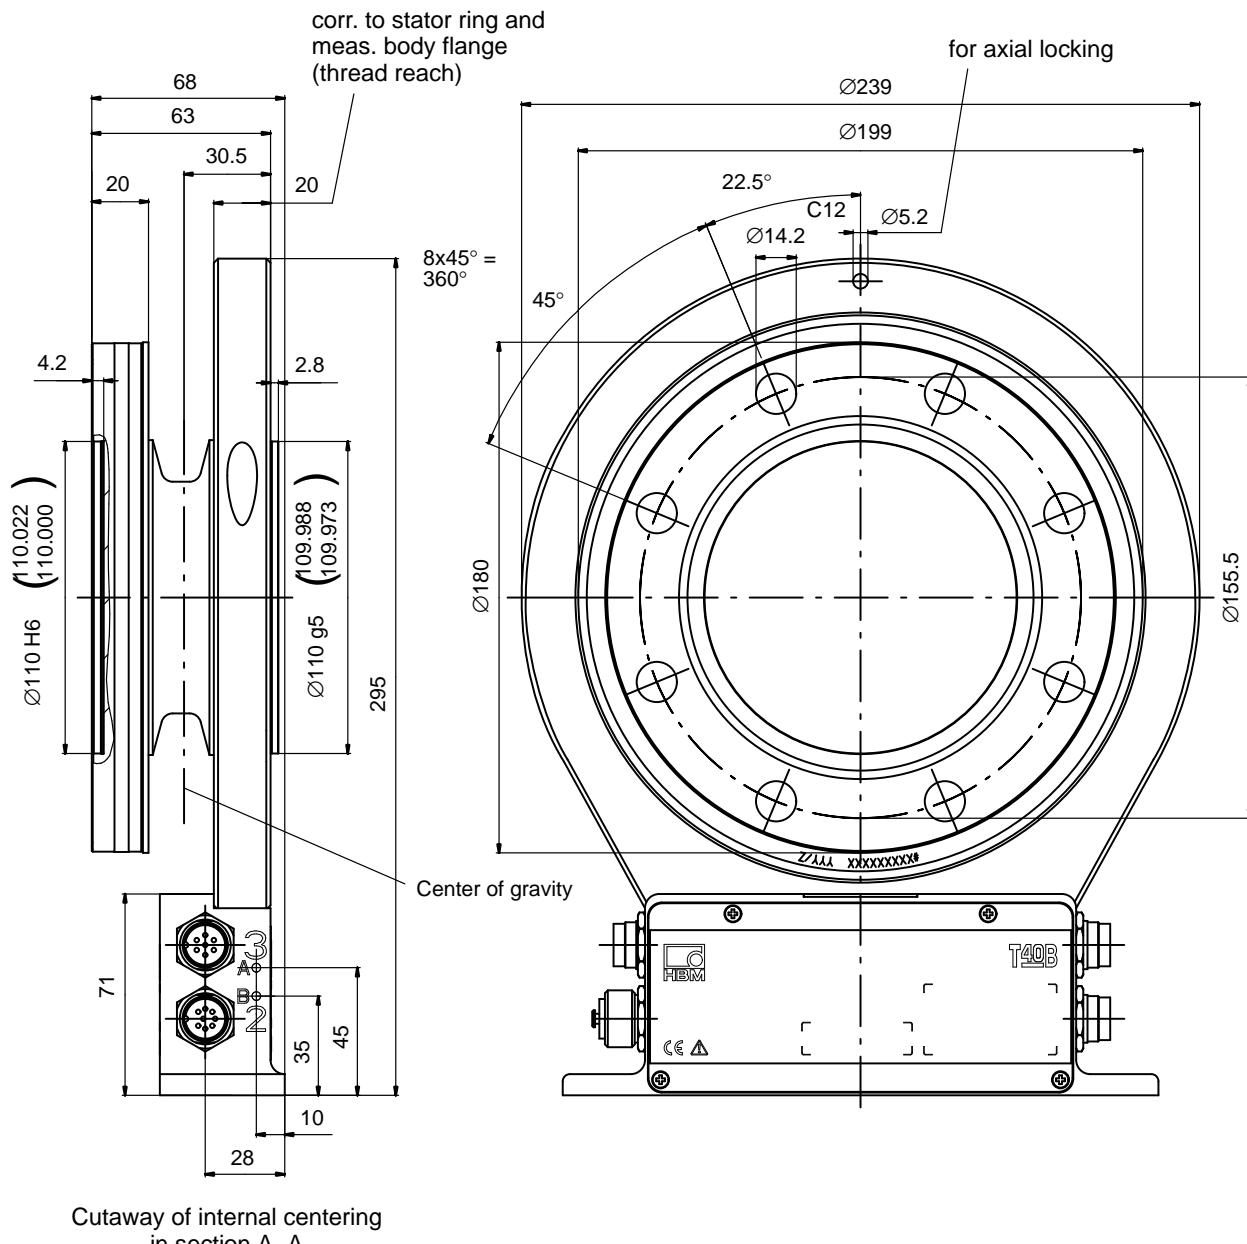

Dimensions of T40B/5 kNm without rotational speed measurement, Option 7, Code U

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm


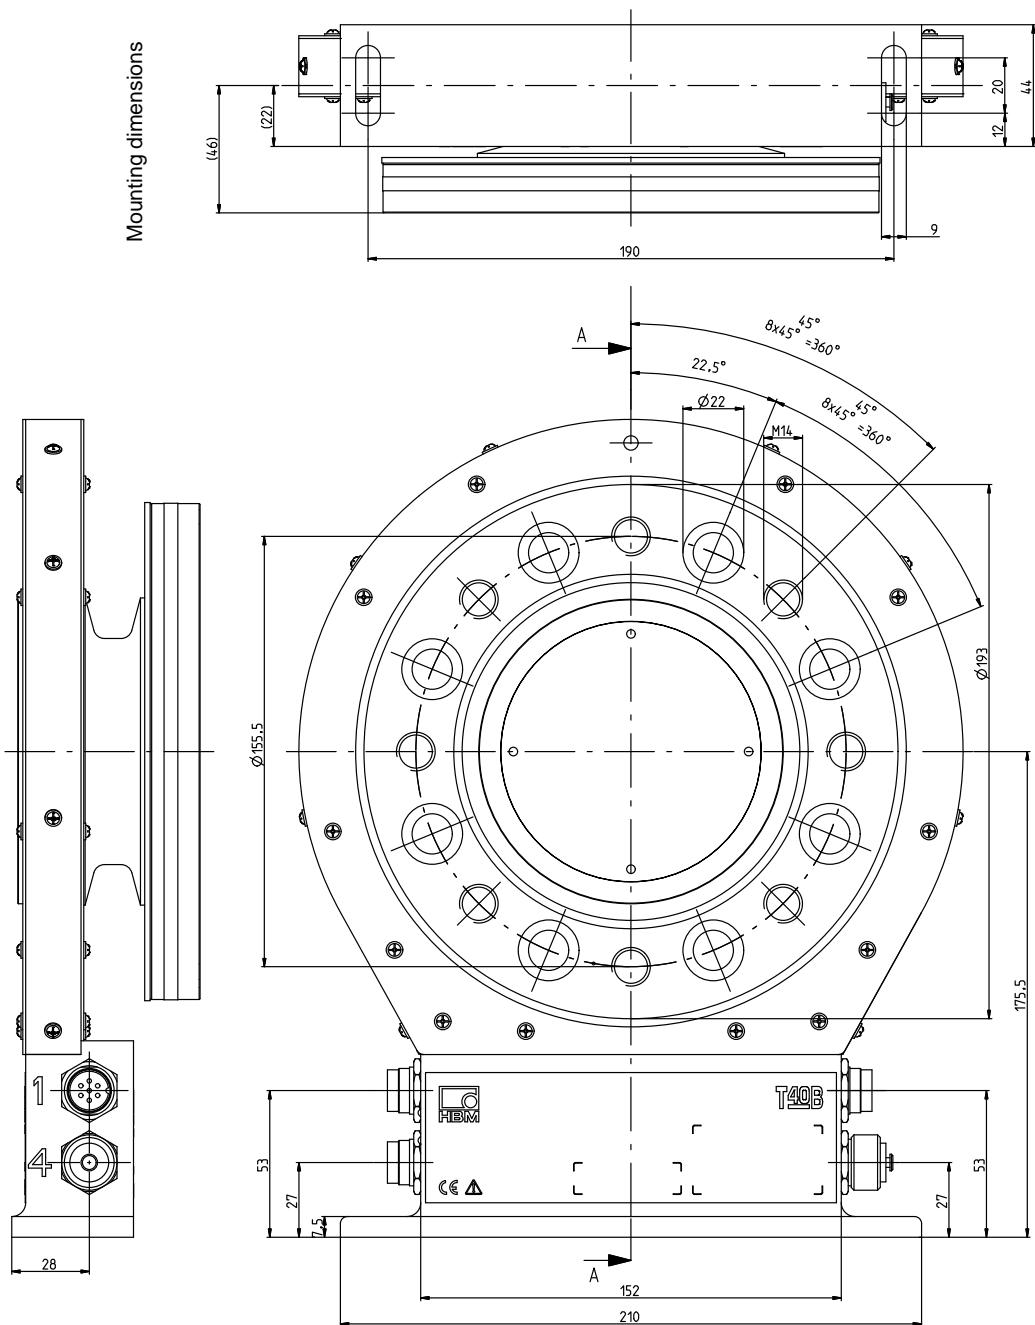


**Dimensions of T40B/5 kNm without rotational speed measurement, Option 7, Code U,
continued**

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm


corr. to stator ring and
meas. body flange see
Option 7 , Code S

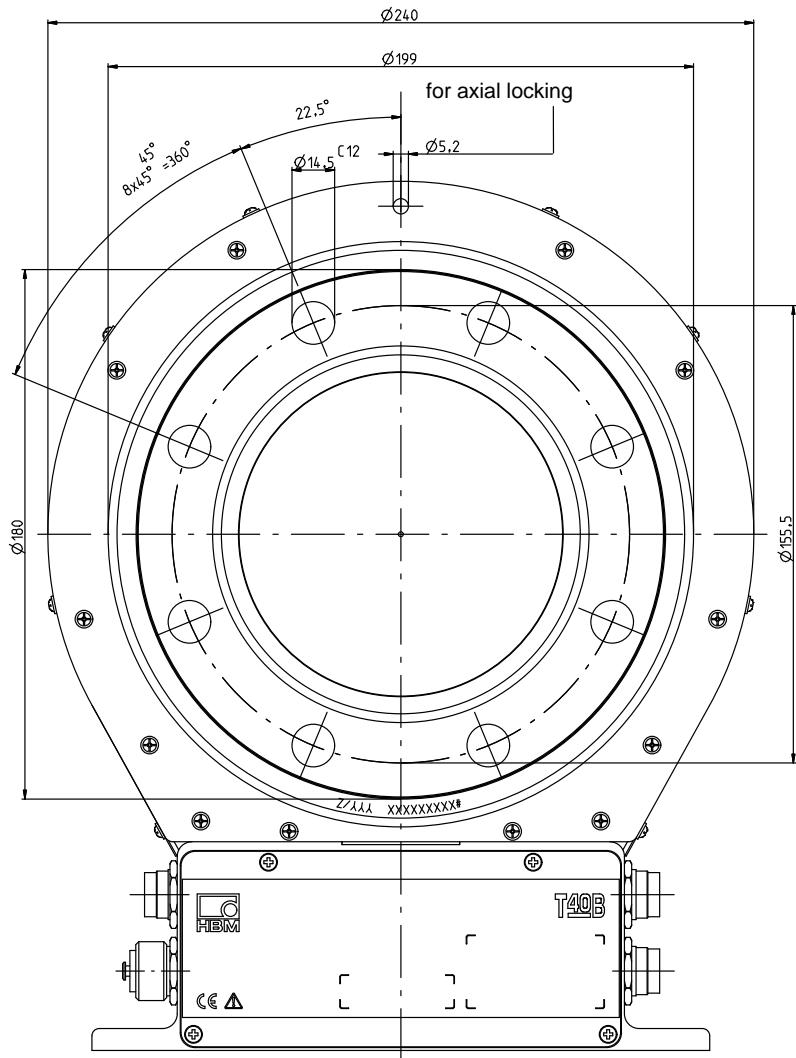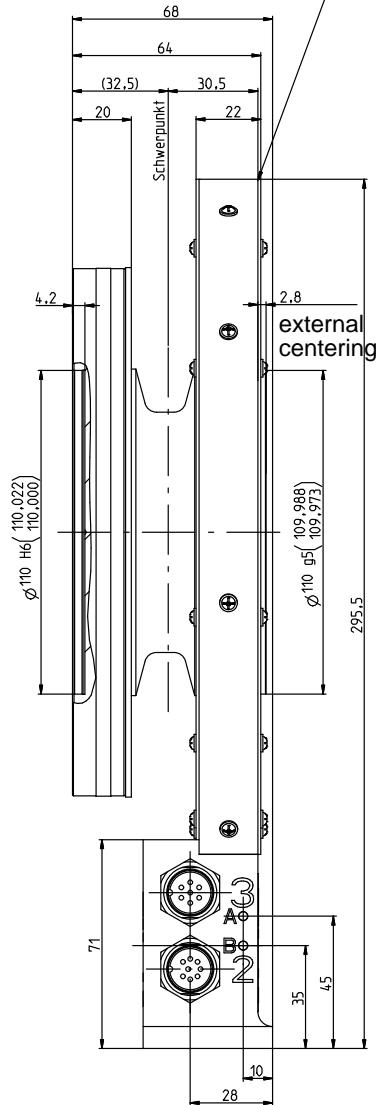

Cutaway of internal centering
in section A-A

Dimensions of T40B/10 kNm without rotational speed measurement, Option 7, Code S


Dimensions in mm (1 mm = 0.03937 inches)

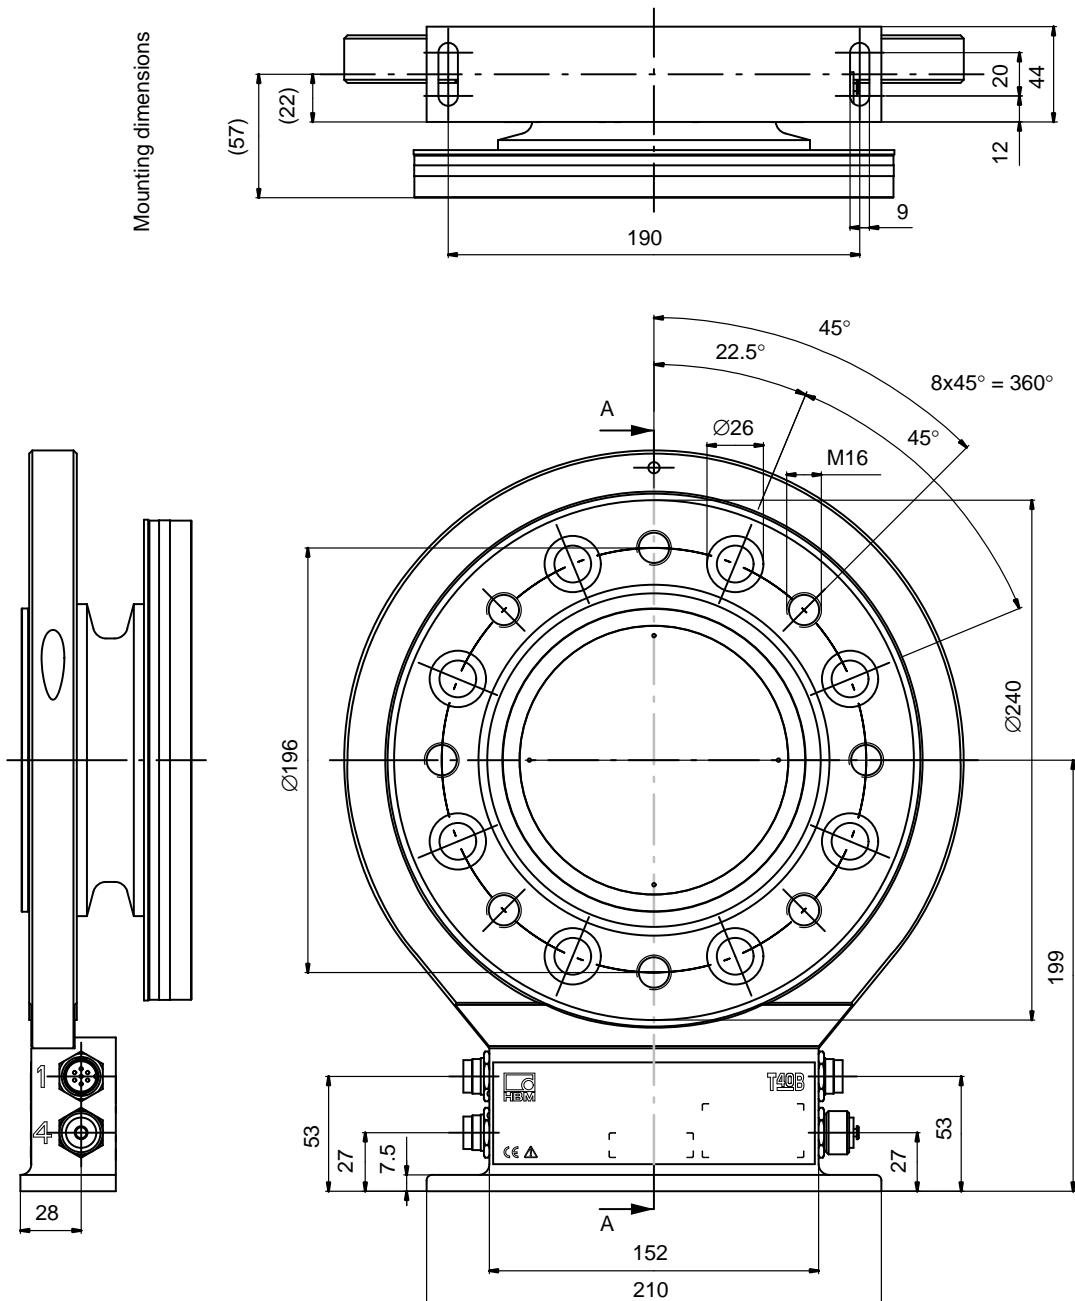

**Dimensions of T40B/10 kNm without rotational speed measurement, Option 7, Code S,
continued**

Dimensions in mm (1 mm = 0.03937 inches)


corr. to stator ring and
meas. body flange
(thread reach)

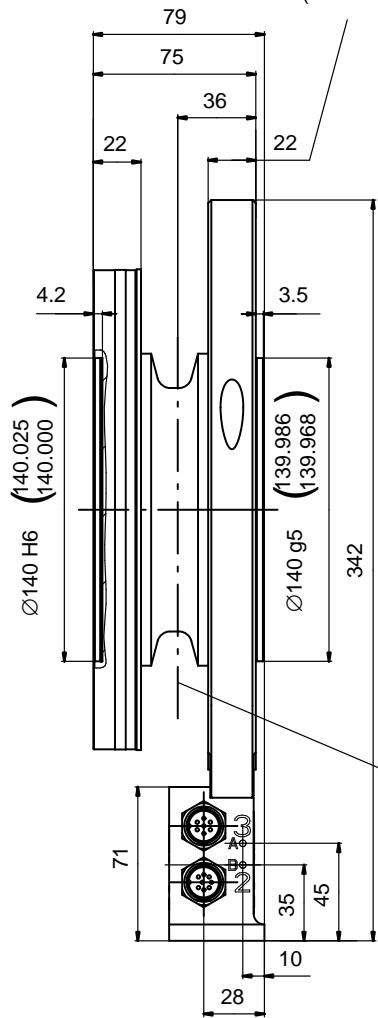

Center of gravity

Cutaway of internal centering
in section A-A

for axial locking



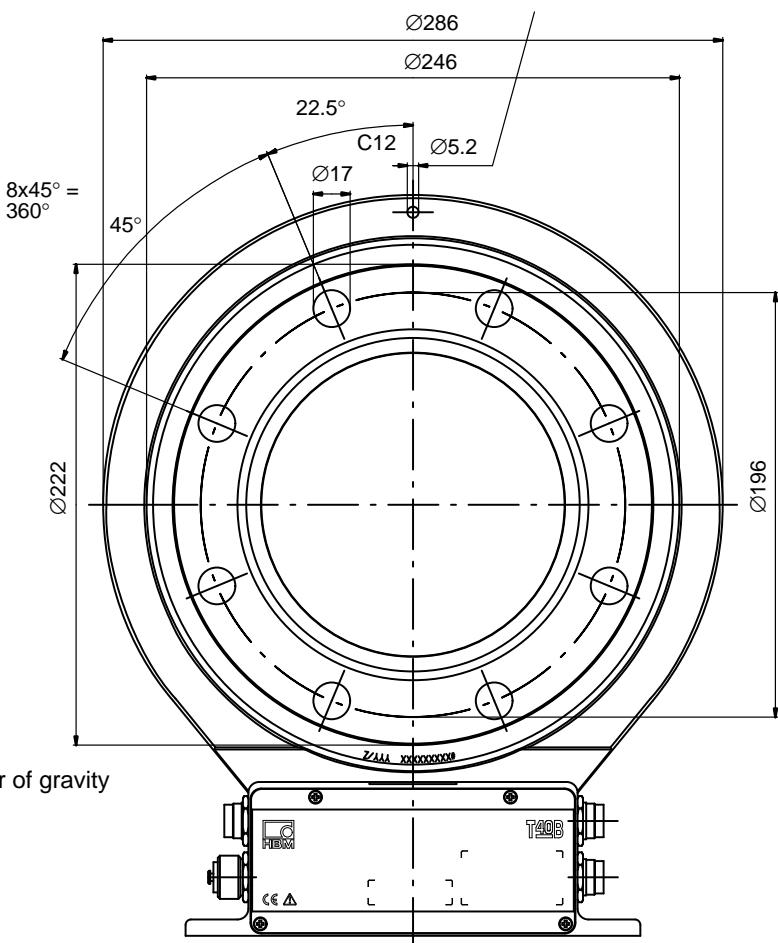


Dimensions of T40B/10 kNm without rotational speed measurement, Option 7, Code U

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

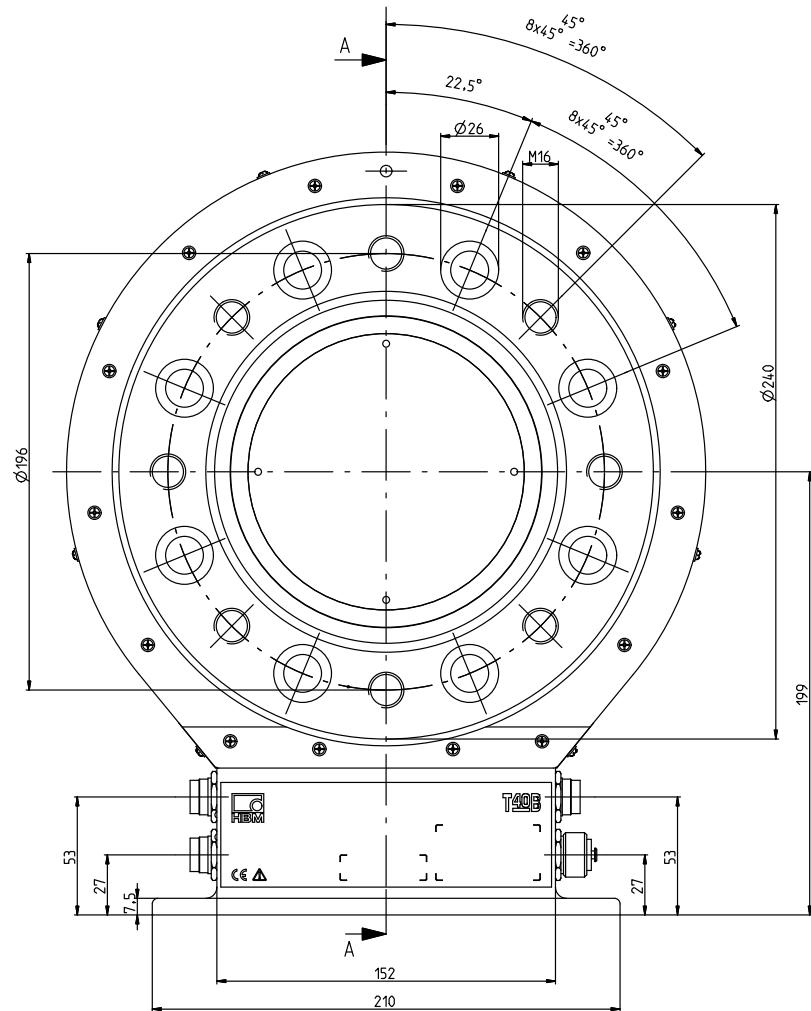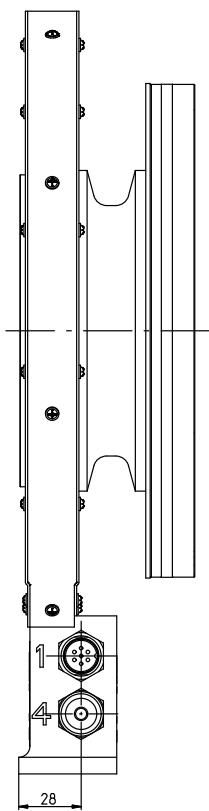
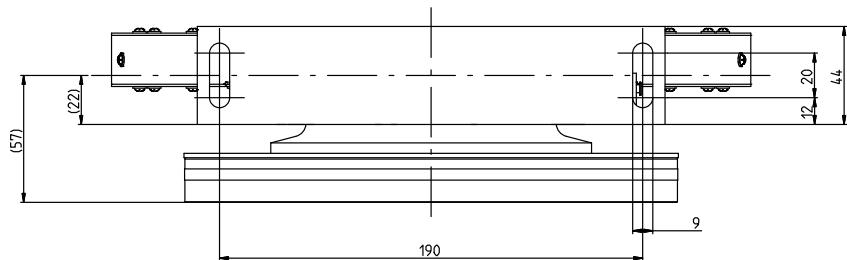


**Dimensions of T40B/10 kNm without rotational speed measurement, Option 7, Code U,
continued**

Dimensions in mm (1 mm = 0.03937 inches)


Screw head height (Shielding plates) = 2.5 mm

corr. to stator ring and
meas. body flange see
Option 7 , Code S

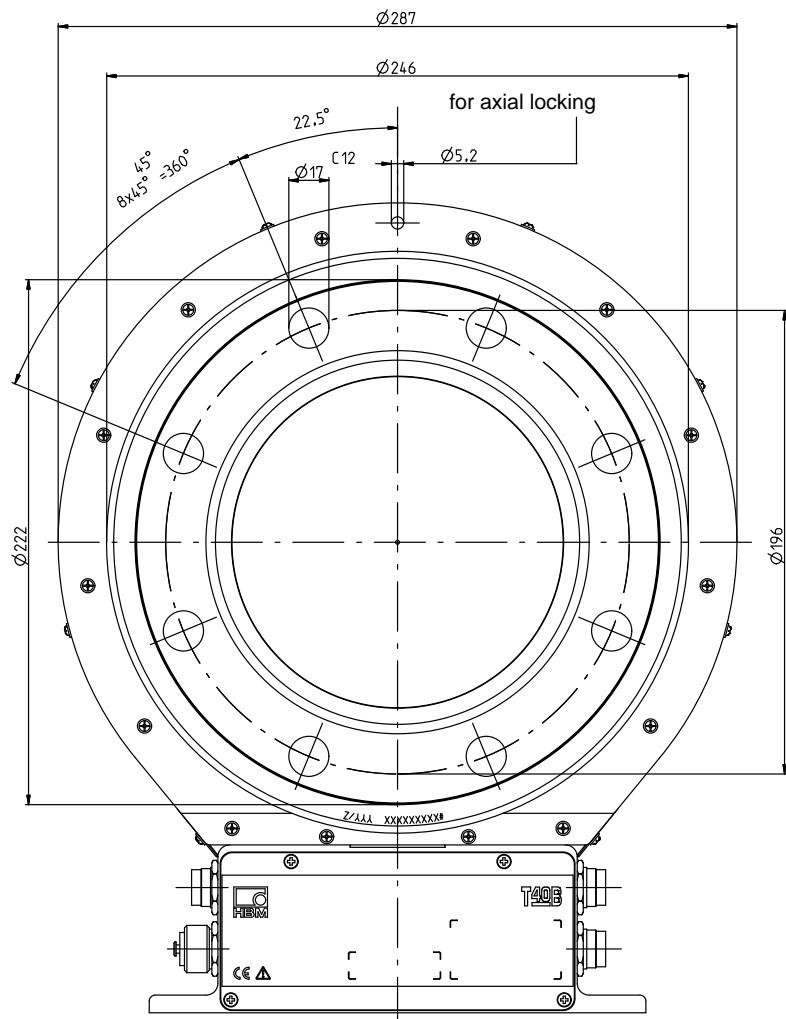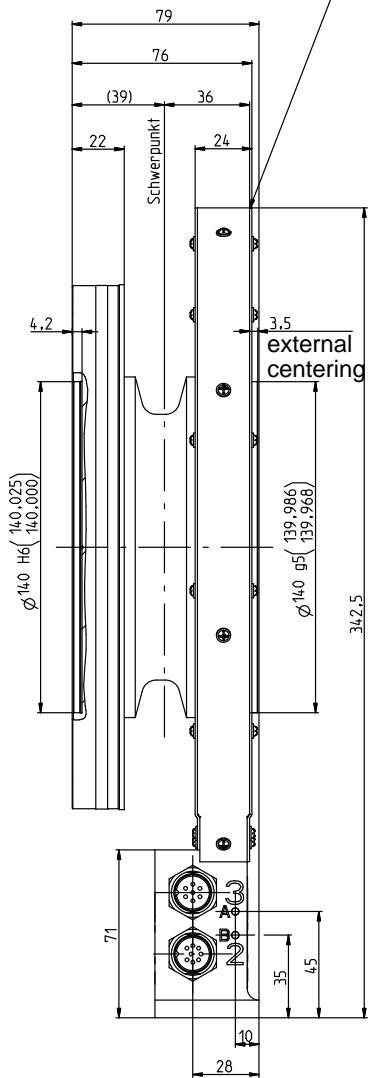


Dimensions of T40B/50 Nm and 100 Nm with rotational speed measurement and reference signal, Option 7, Code S

Dimensions in mm (1 mm = 0.03937 inches)

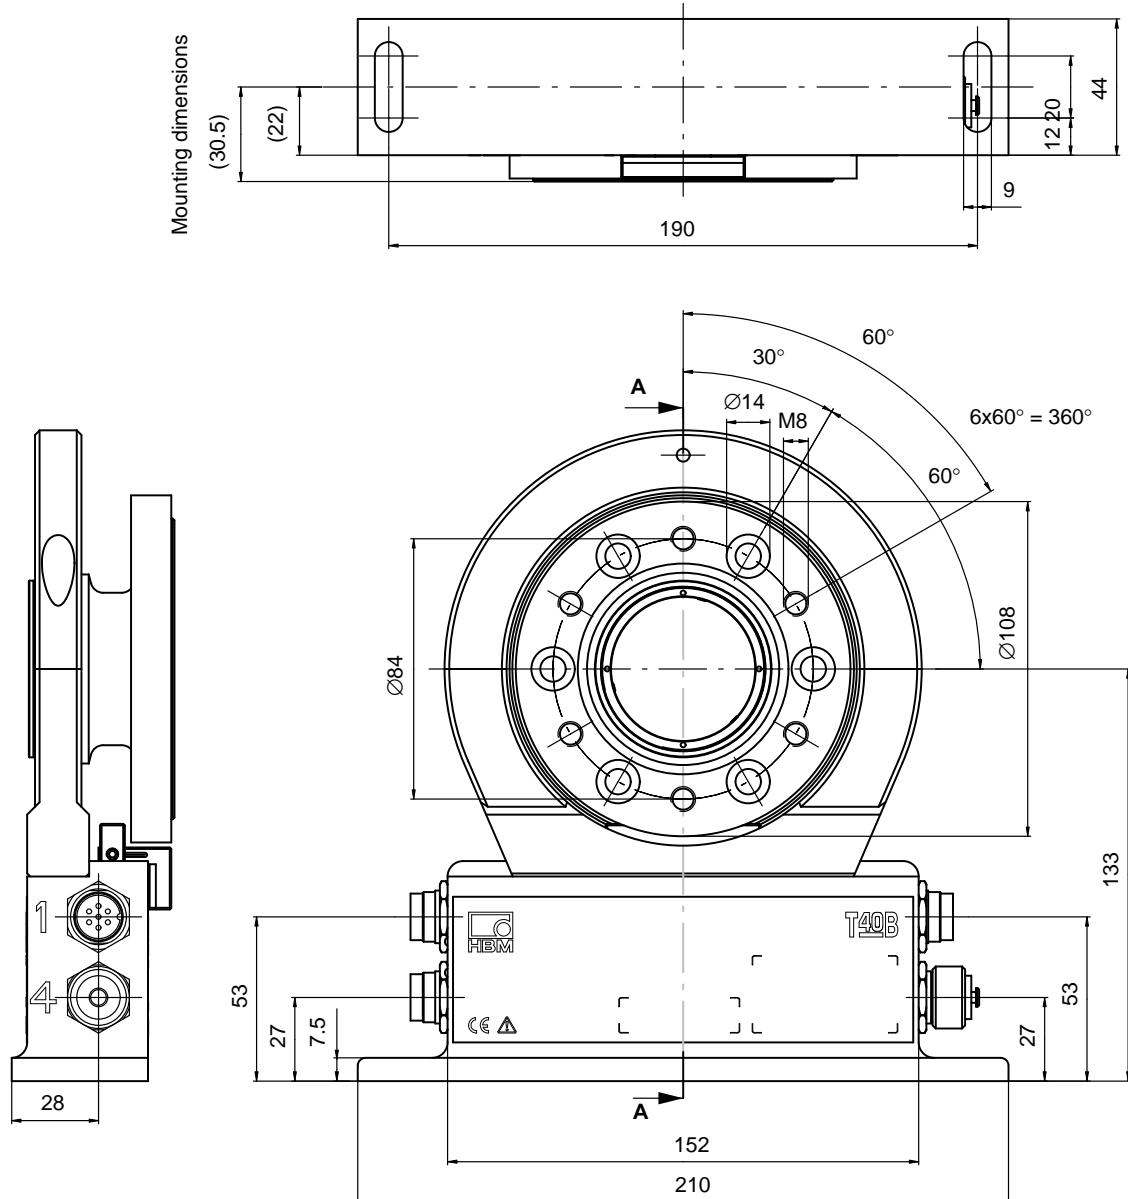

Dimensions of T40B/50 Nm and 100 Nm with rotational speed measurement and reference signal, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)

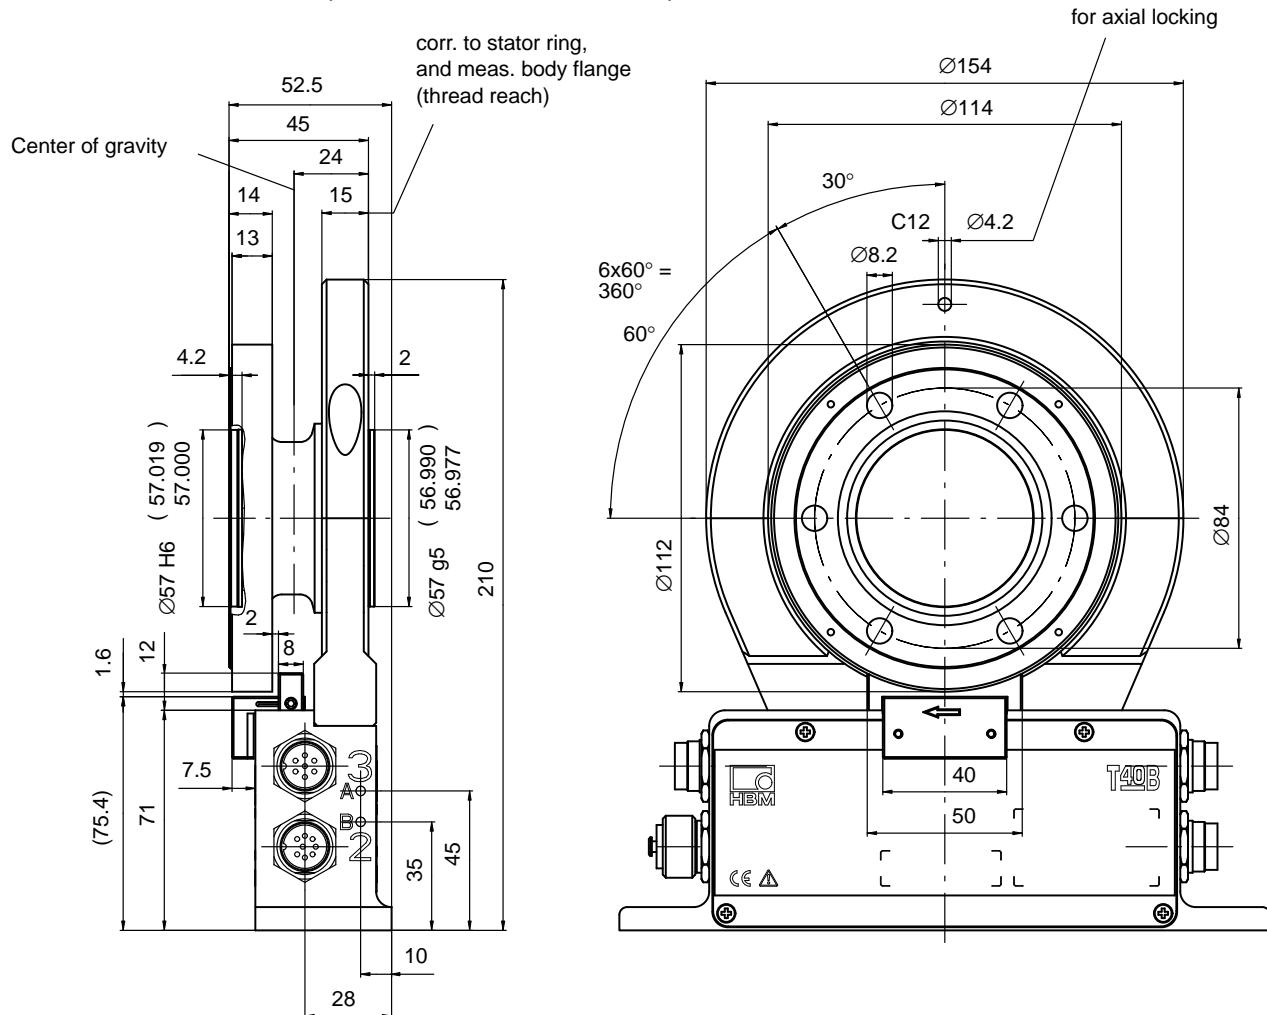


Dimensions of T40B/50 Nm and 100 Nm with rotational speed measurement and reference signal, Option 7, Code U



Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

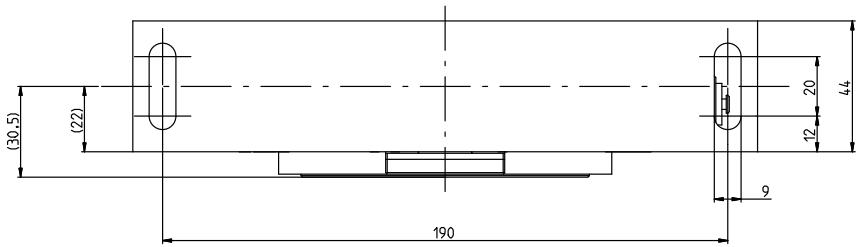

Only Option 6.
Code A

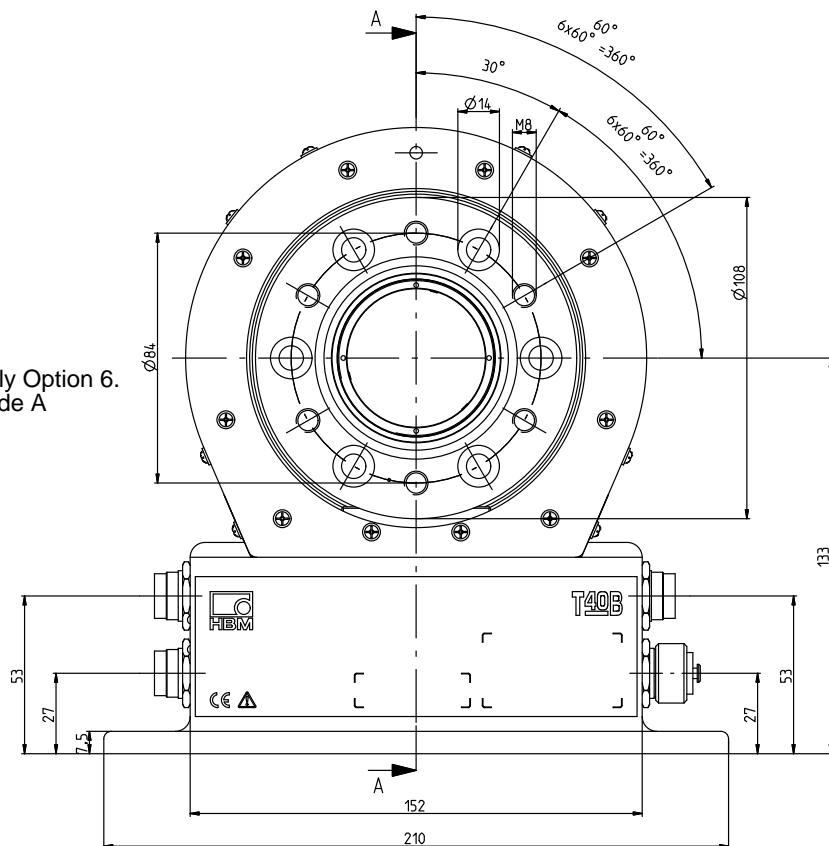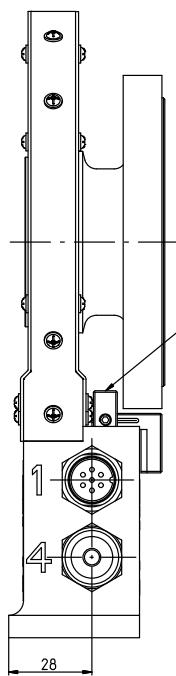


Dimensions of T40B/50 Nm and 100 Nm with rotational speed measurement and reference signal, Option 7, Code U, continued


Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

corr. to stator ring and
meas. body flange see
Option 7 , Code S

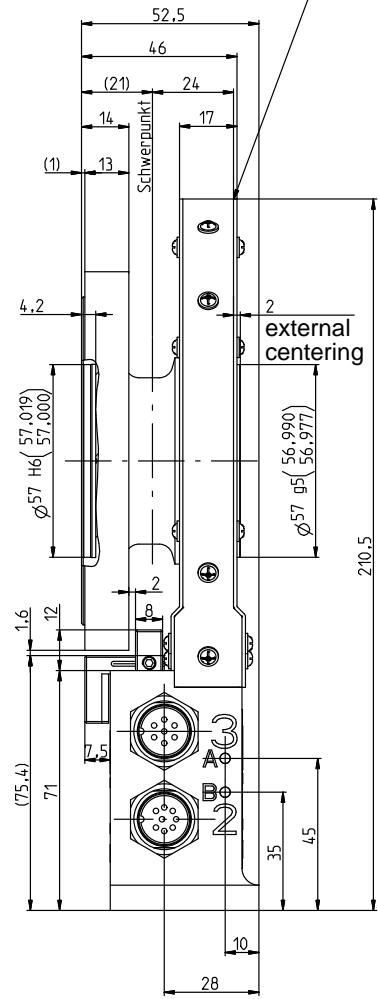


Cutaway of internal centering in section A-A

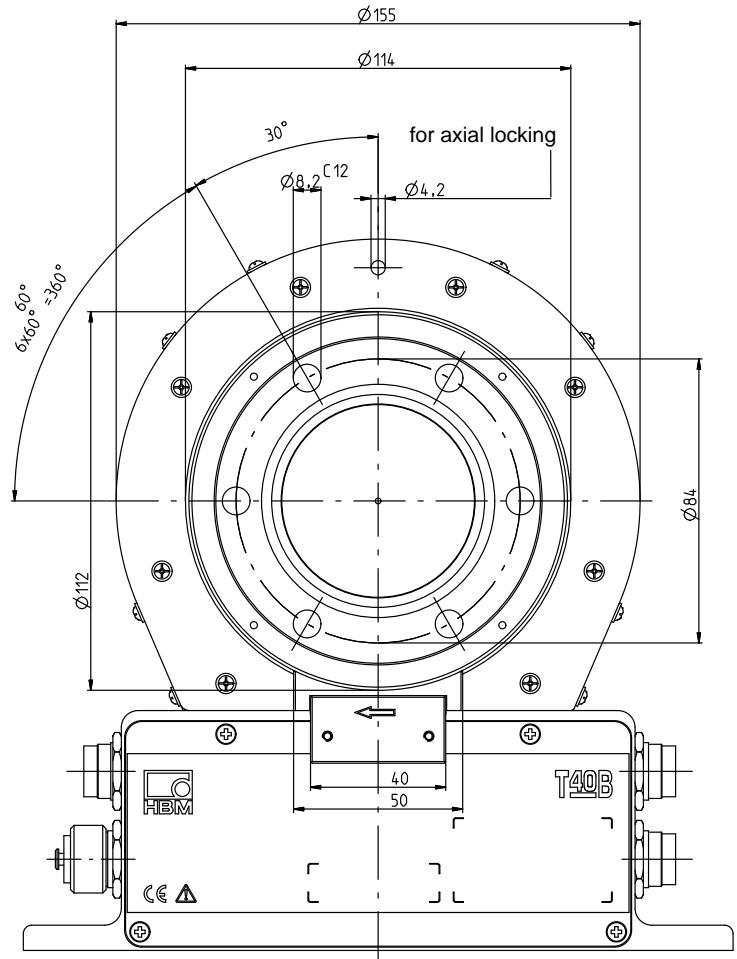


**Dimensions of T40B/200 Nm with rotational speed measurement and reference signal,
Option 7, Code S**

Dimensions in mm (1 mm = 0.03937 inches)

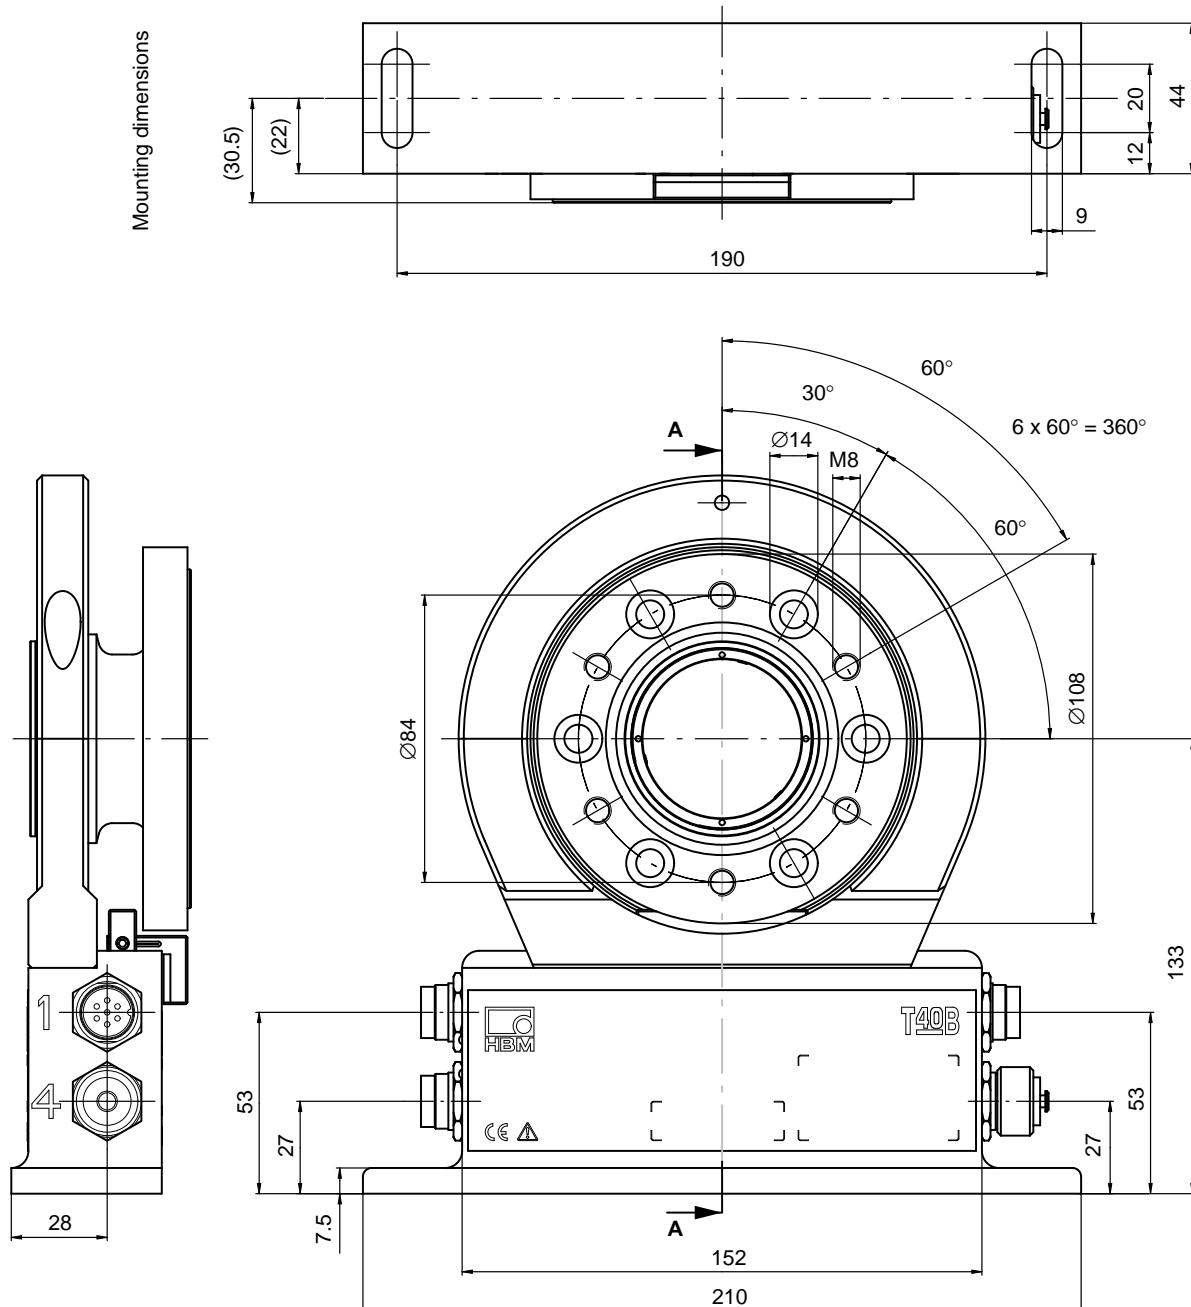

Dimensions of T40B/200 Nm with rotational speed measurement and reference signal, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)


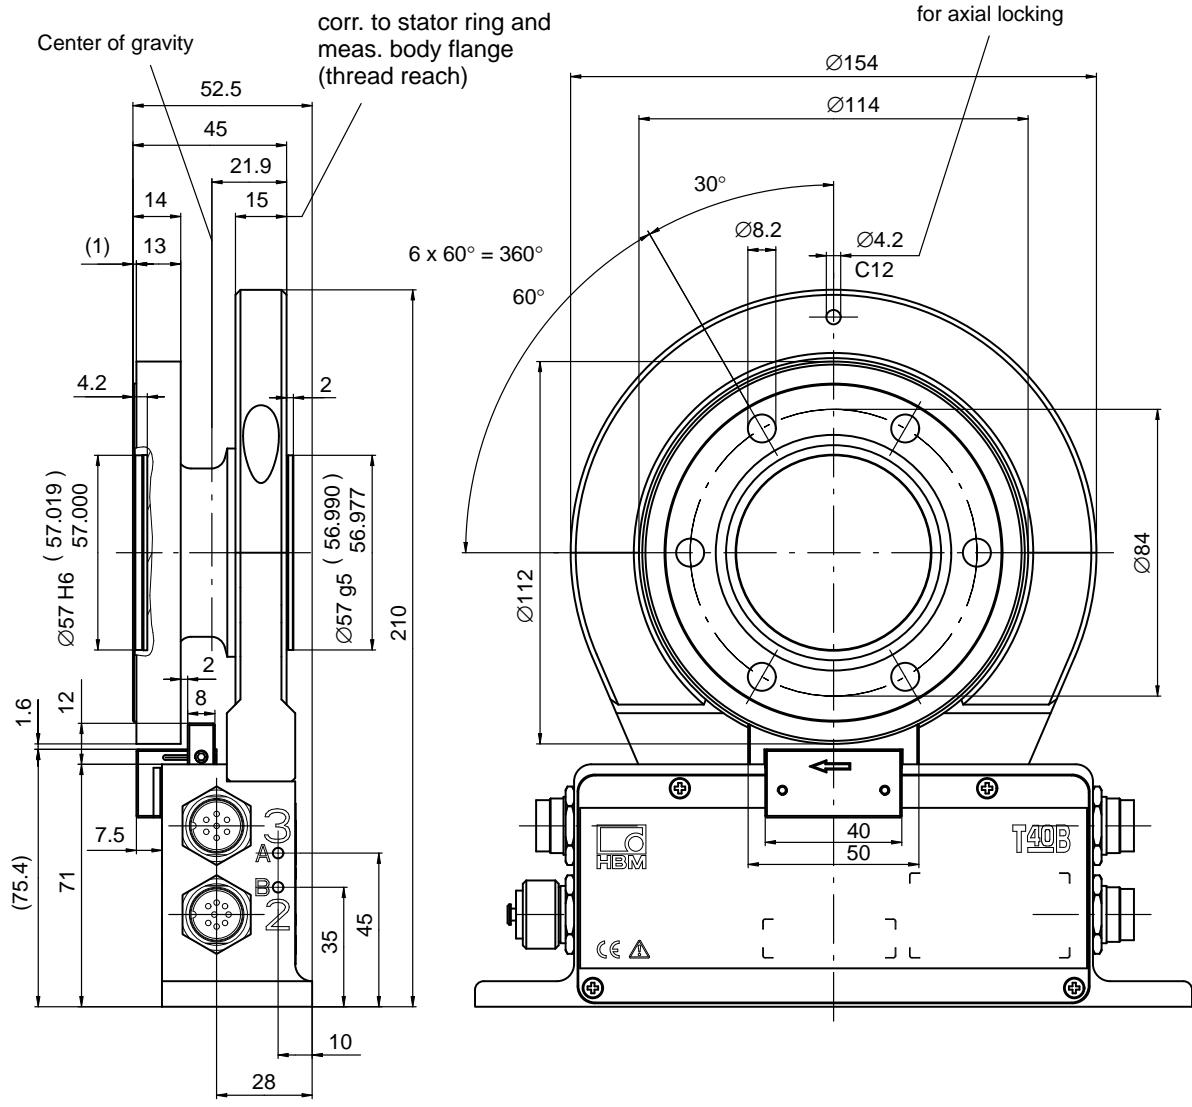


Cutaway of internal centering in section A-A

**Dimensions of T40B/200 Nm with rotational speed measurement and reference signal,
Option 7, Code U**

Dimensions in mm (1 mm = 0.03937 inches)


Screw head height (Shielding plates) = 2.5 mm

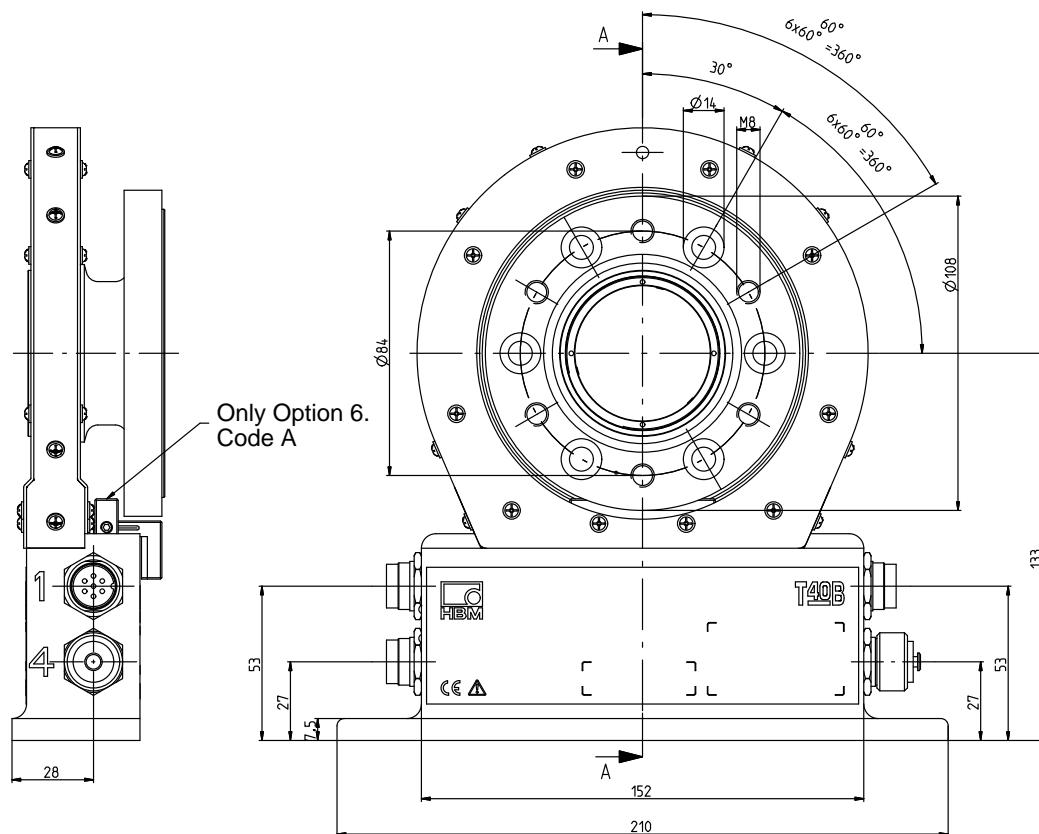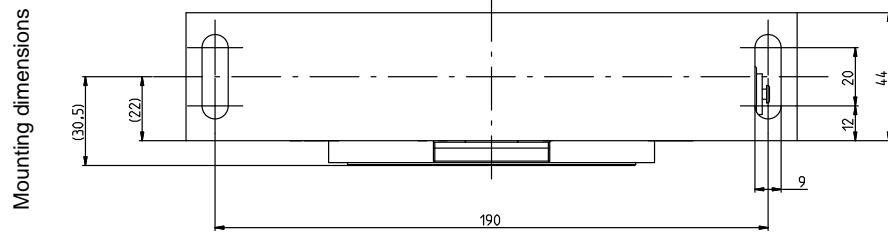

**Dimensions of T40B/200 Nm with rotational speed measurement and reference signal,
Option 7, Code U, continued**


Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

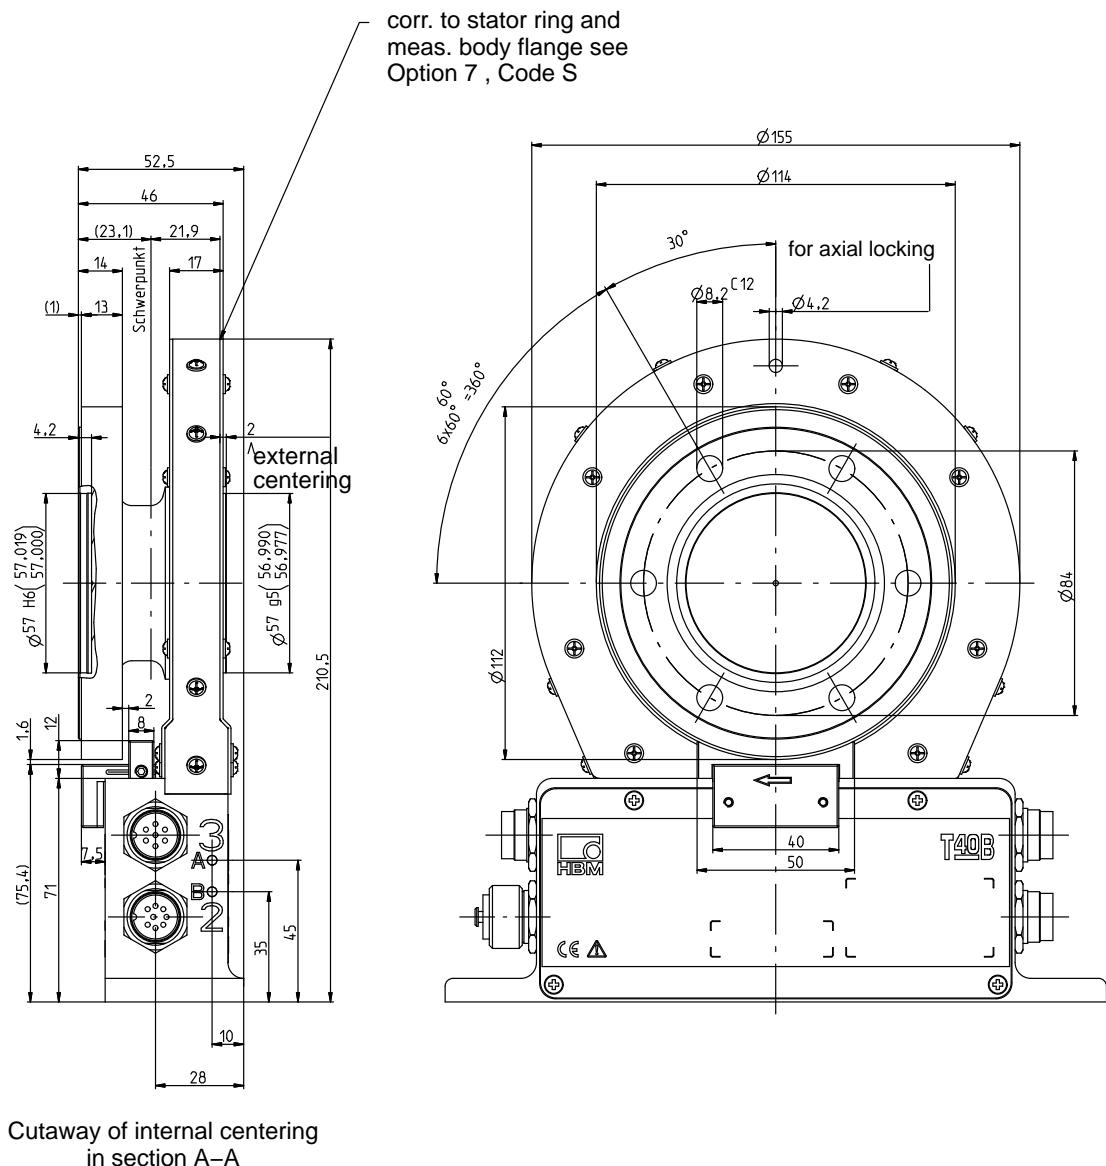


Dimensions of T40B/500 Nm and 1 kNm with rotational speed measurement and reference signal, Option 7, Code S

Dimensions in mm (1 mm = 0.03937 inches)

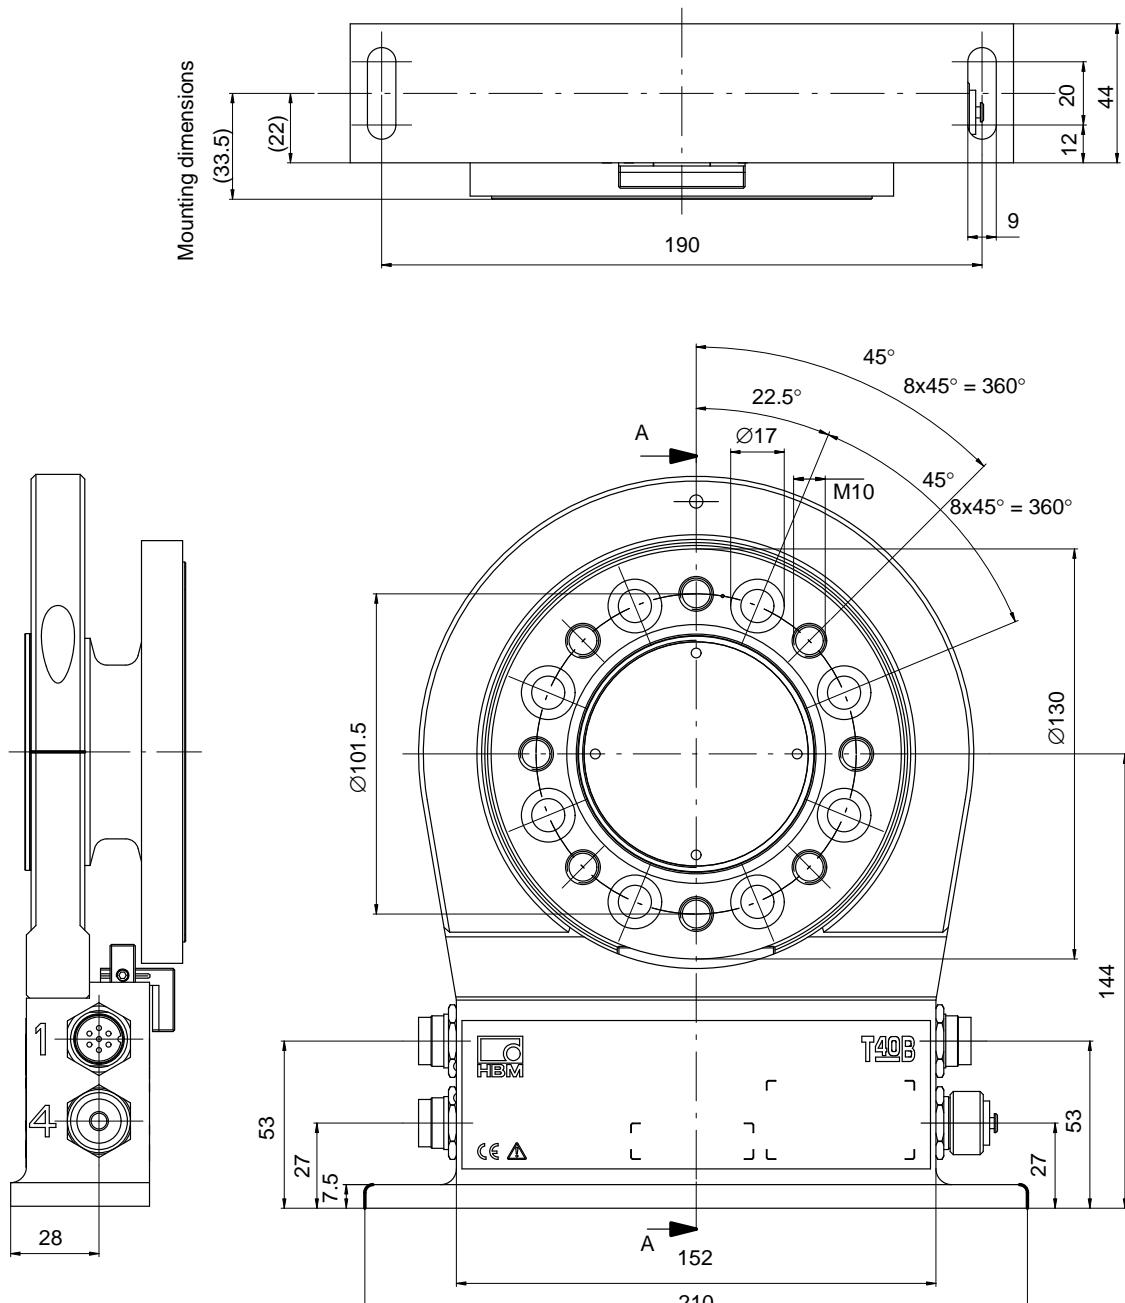


Dimensions of T40B/500 Nm and 1 kNm with rotational speed measurement and reference signal, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)

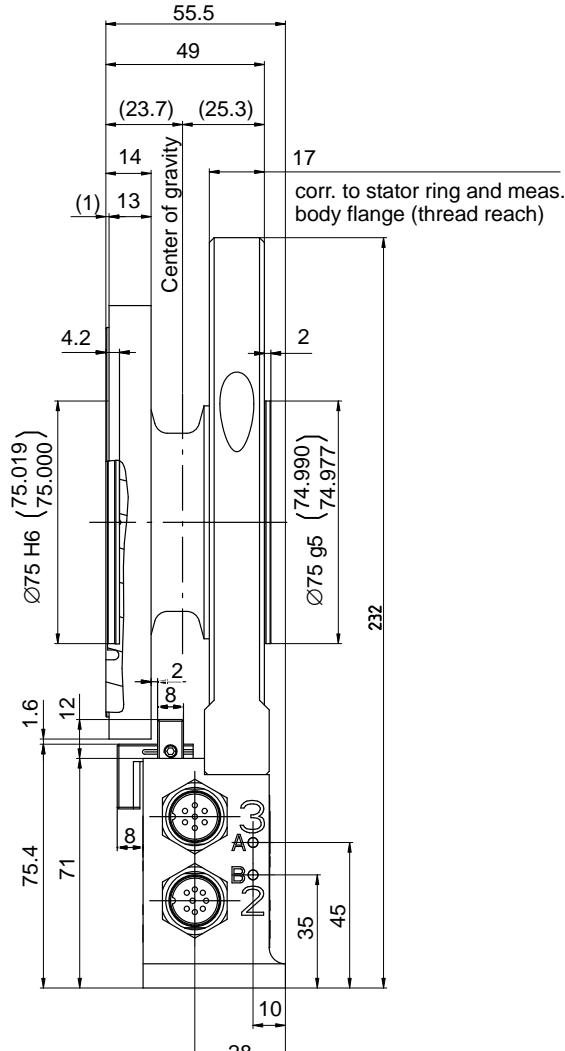

Cutaway of internal centering
in section A-A

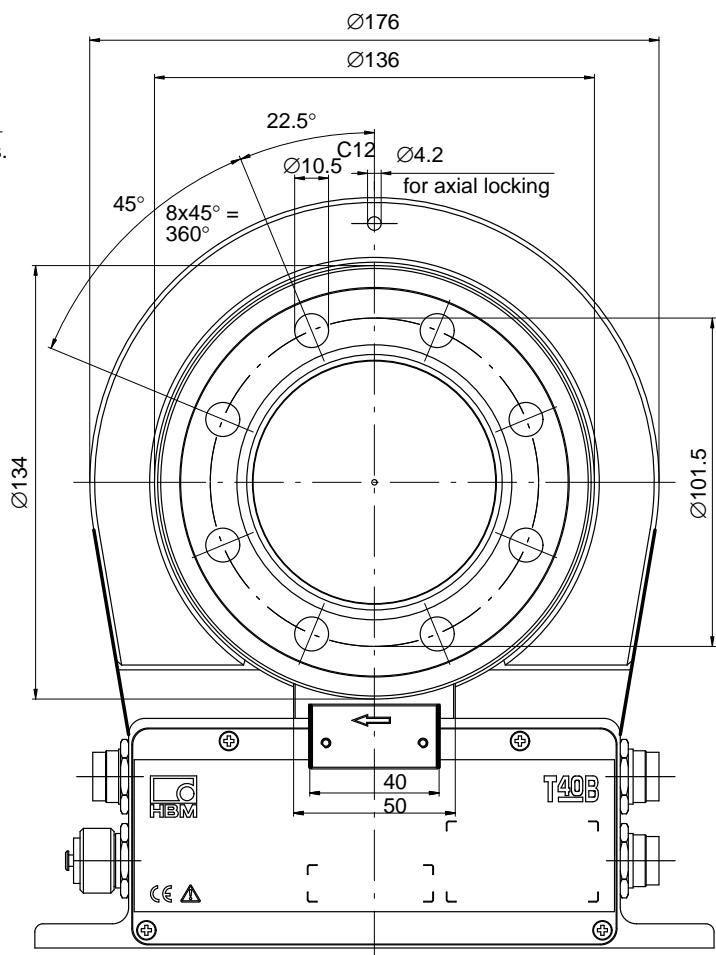


Dimensions of T40B/500 Nm and 1 kNm with rotational speed measurement and reference signal, Option 7, Code U


Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

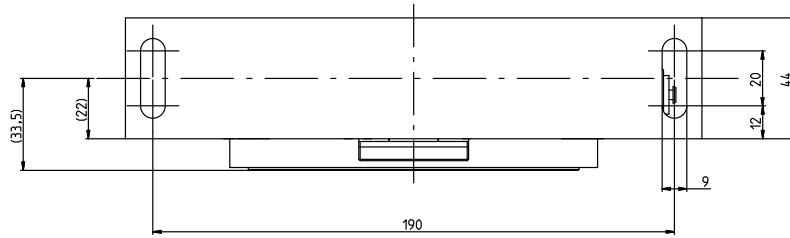


Only Option 6.
Code A

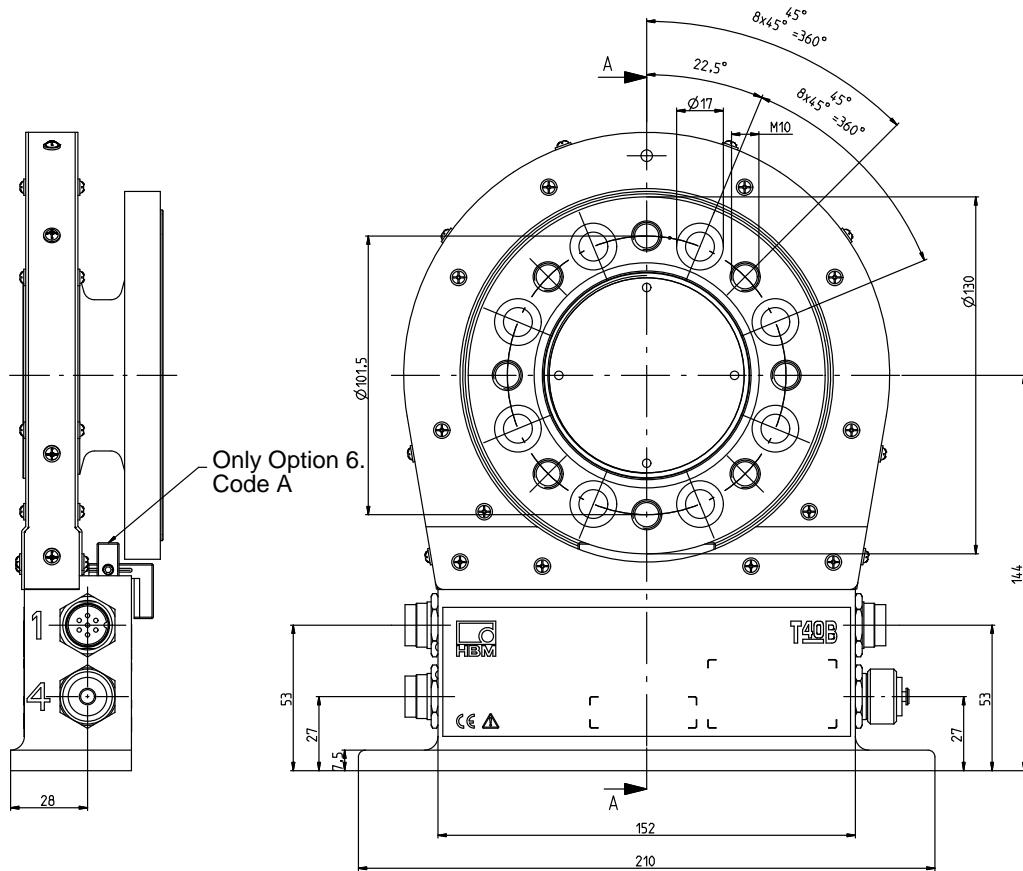

Dimensions of T40B/500 Nm and 1 kNm with rotational speed measurement and reference signal, Option 7, Code U, continued

Dimensions in mm (1 mm = 0.03937 inches)



Screw head height (Shielding plates) = 2.5 mm

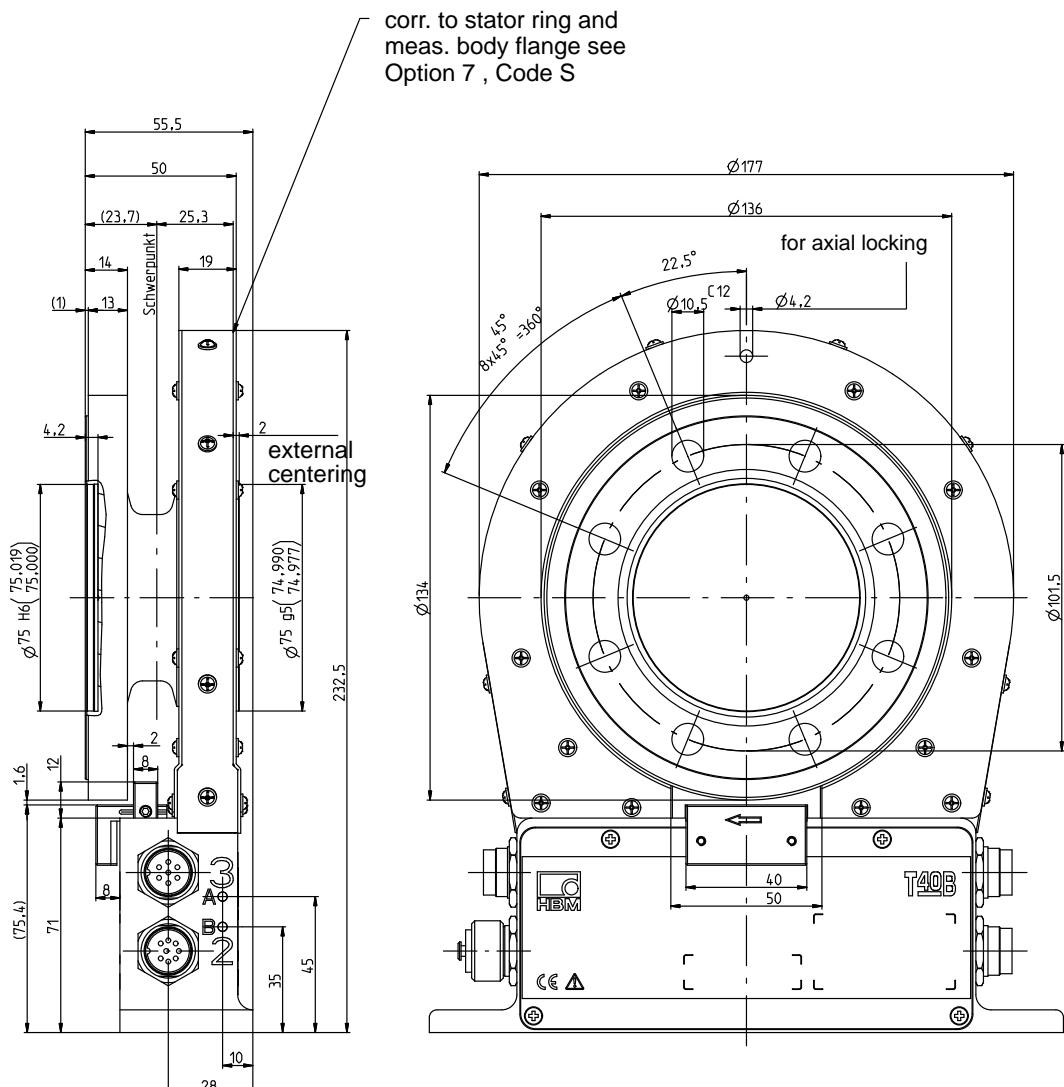

Cutaway of internal centering
in section A-A


Dimensions of T40B/2 kNm and 3 kNm with rotational speed measurement and reference signal, Option 7, Code S

Dimensions in mm (1 mm = 0.03937 inches)

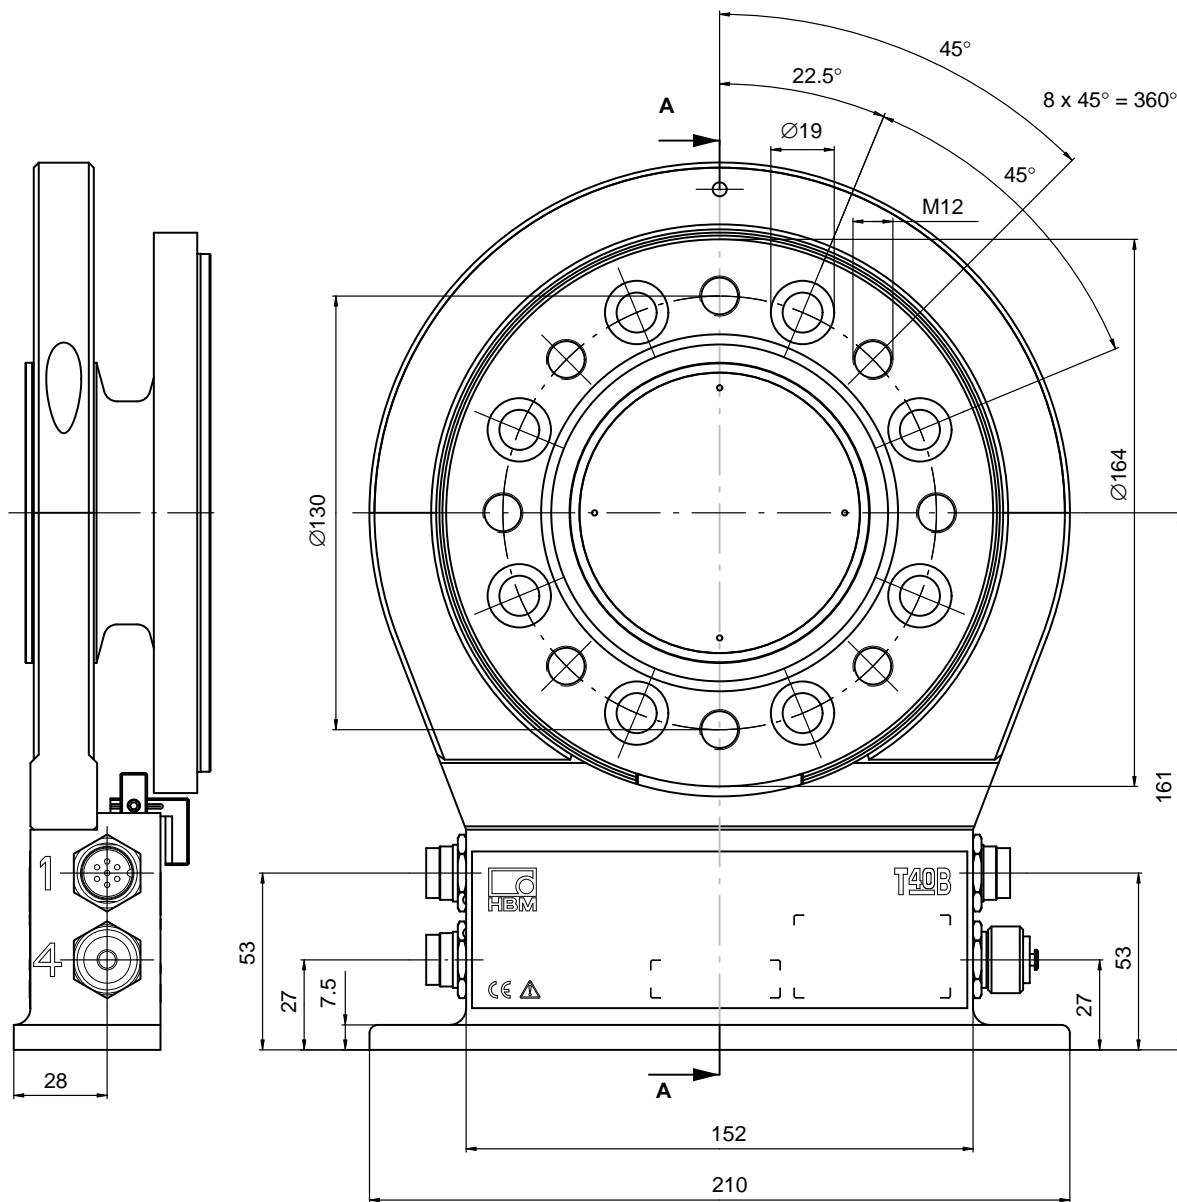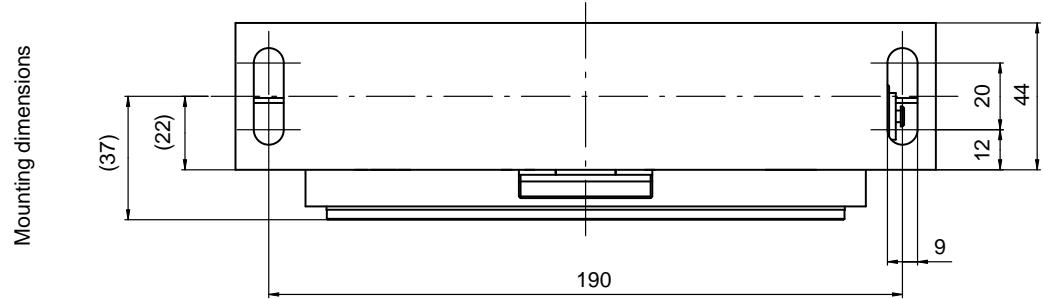

Dimensions of T40B/2 kNm and 3 kNm with rotational speed measurement and reference signal, Option 7, Code S, continued

Dimensions in mm (1 mm = 0.03937 inches)


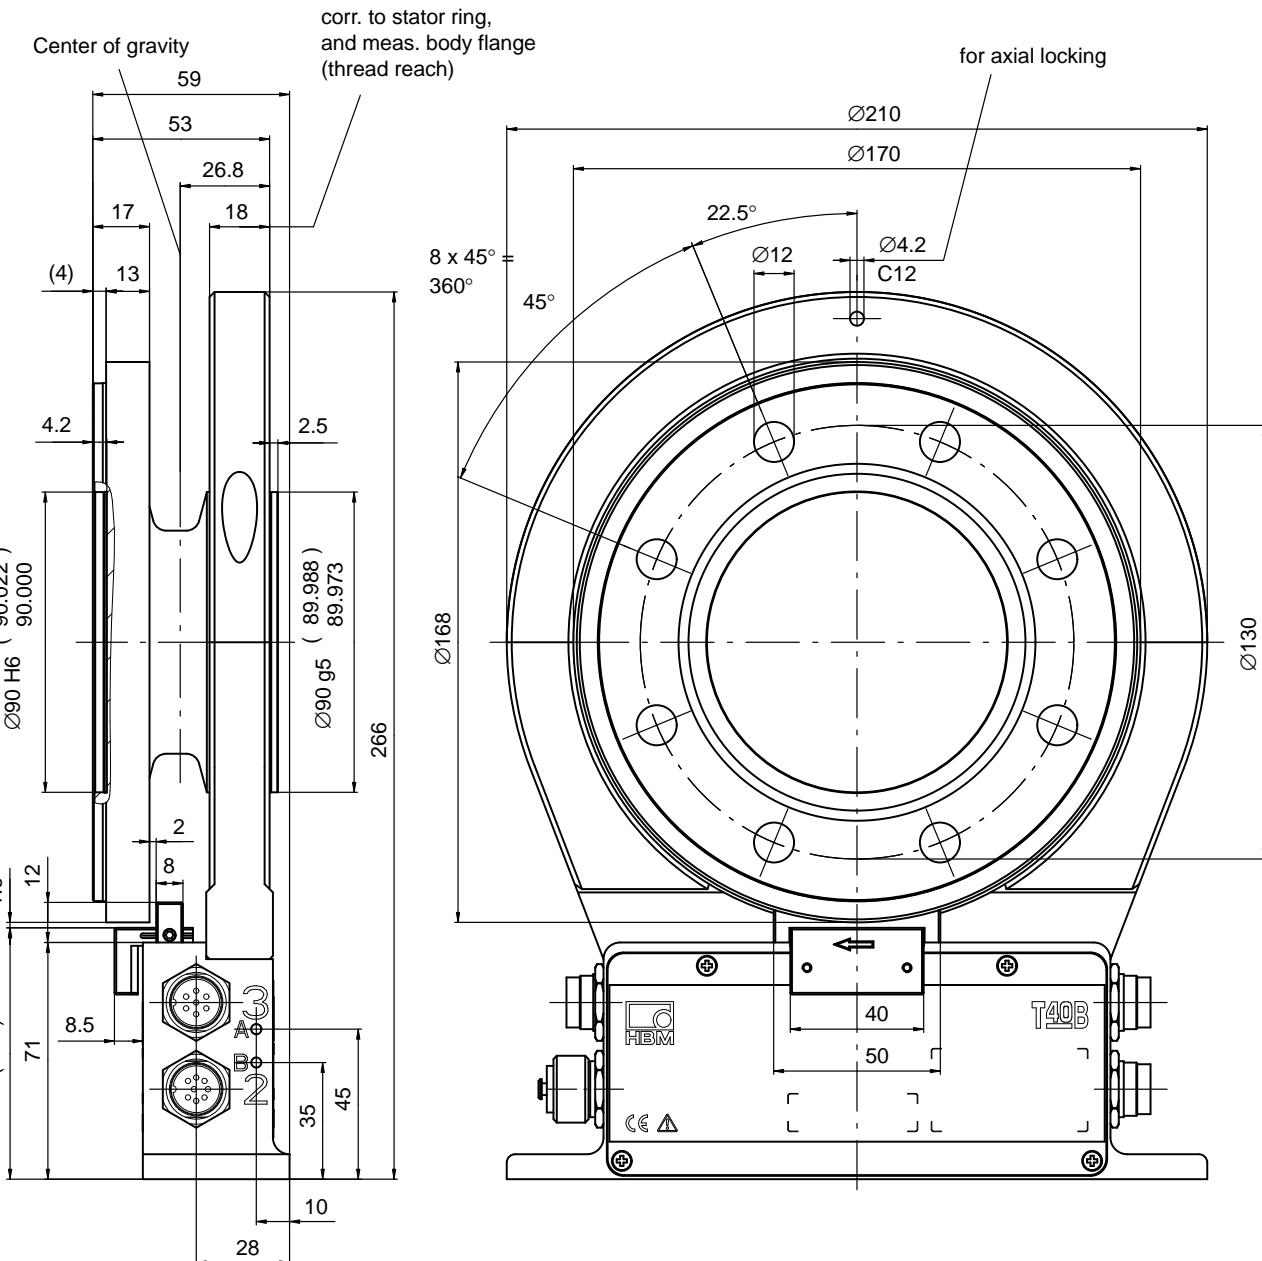


Dimensions of T40B/2 kNm and 3 kNm with rotational speed measurement and reference signal, Option 7, Code U

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

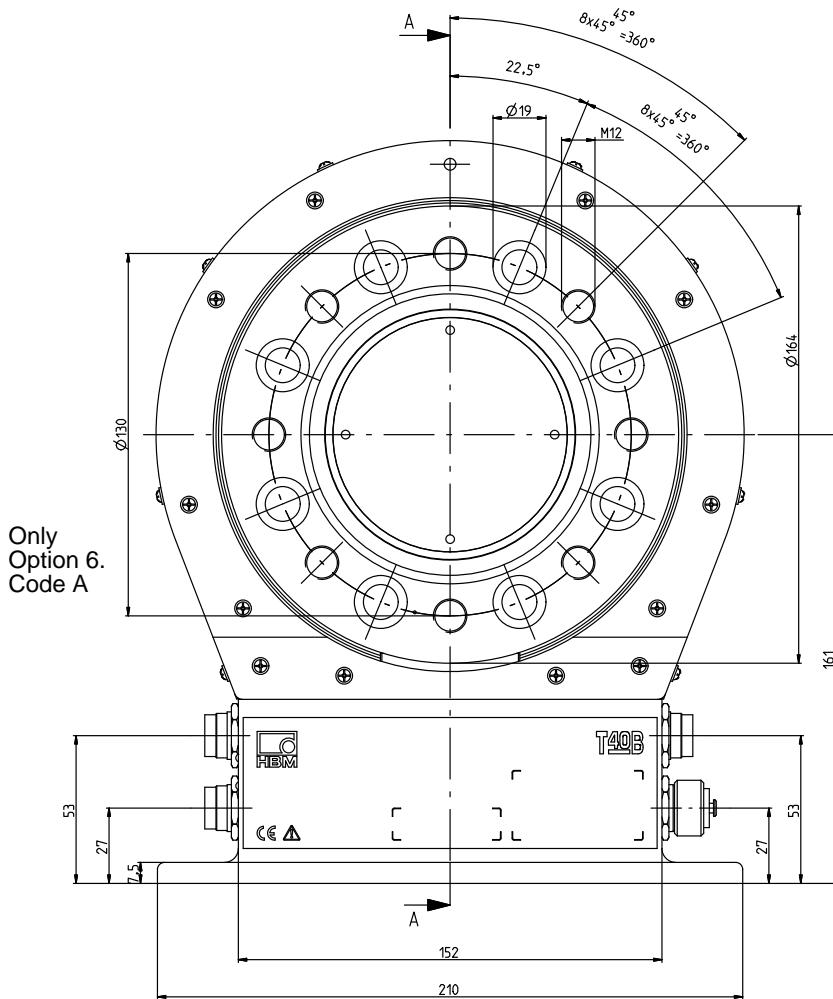
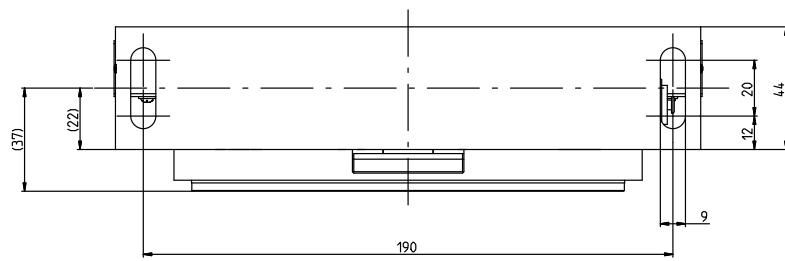


Dimensions of T40B/2 kNm and 3 kNm with rotational speed measurement and reference signal, Option 7, Code U, continued

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm


corr. to stator ring and
meas. body flange see
Option 7 , Code S

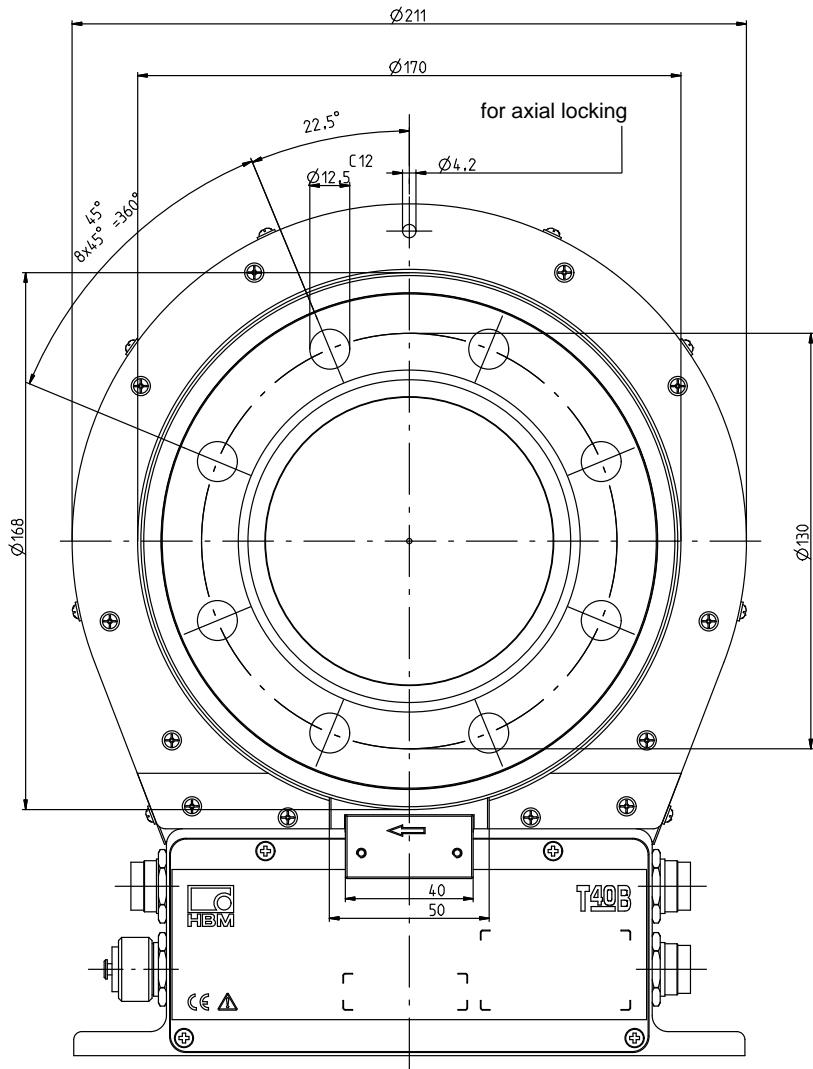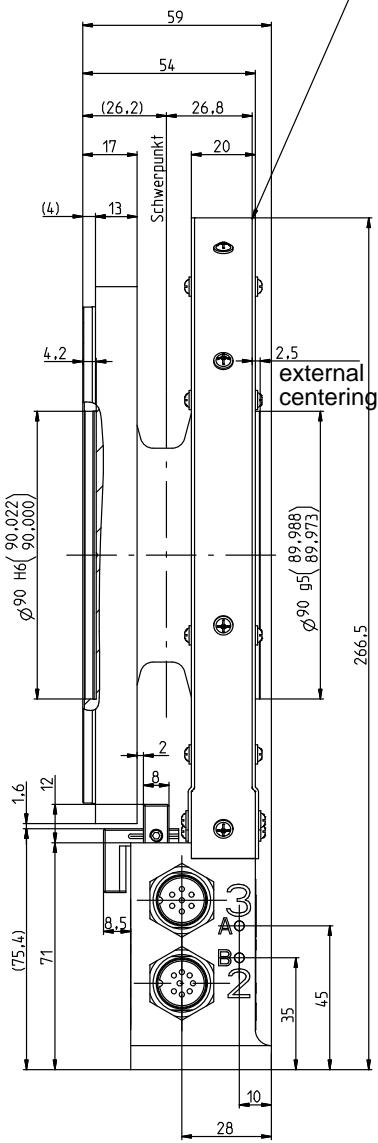

Cutaway of internal centering
in section A-A


**Dimensions of T40B/5 kNm with rotational speed measurement and reference signal,
Option 7, Code S**

Dimensions in mm (1 mm = 0.03937 inches)

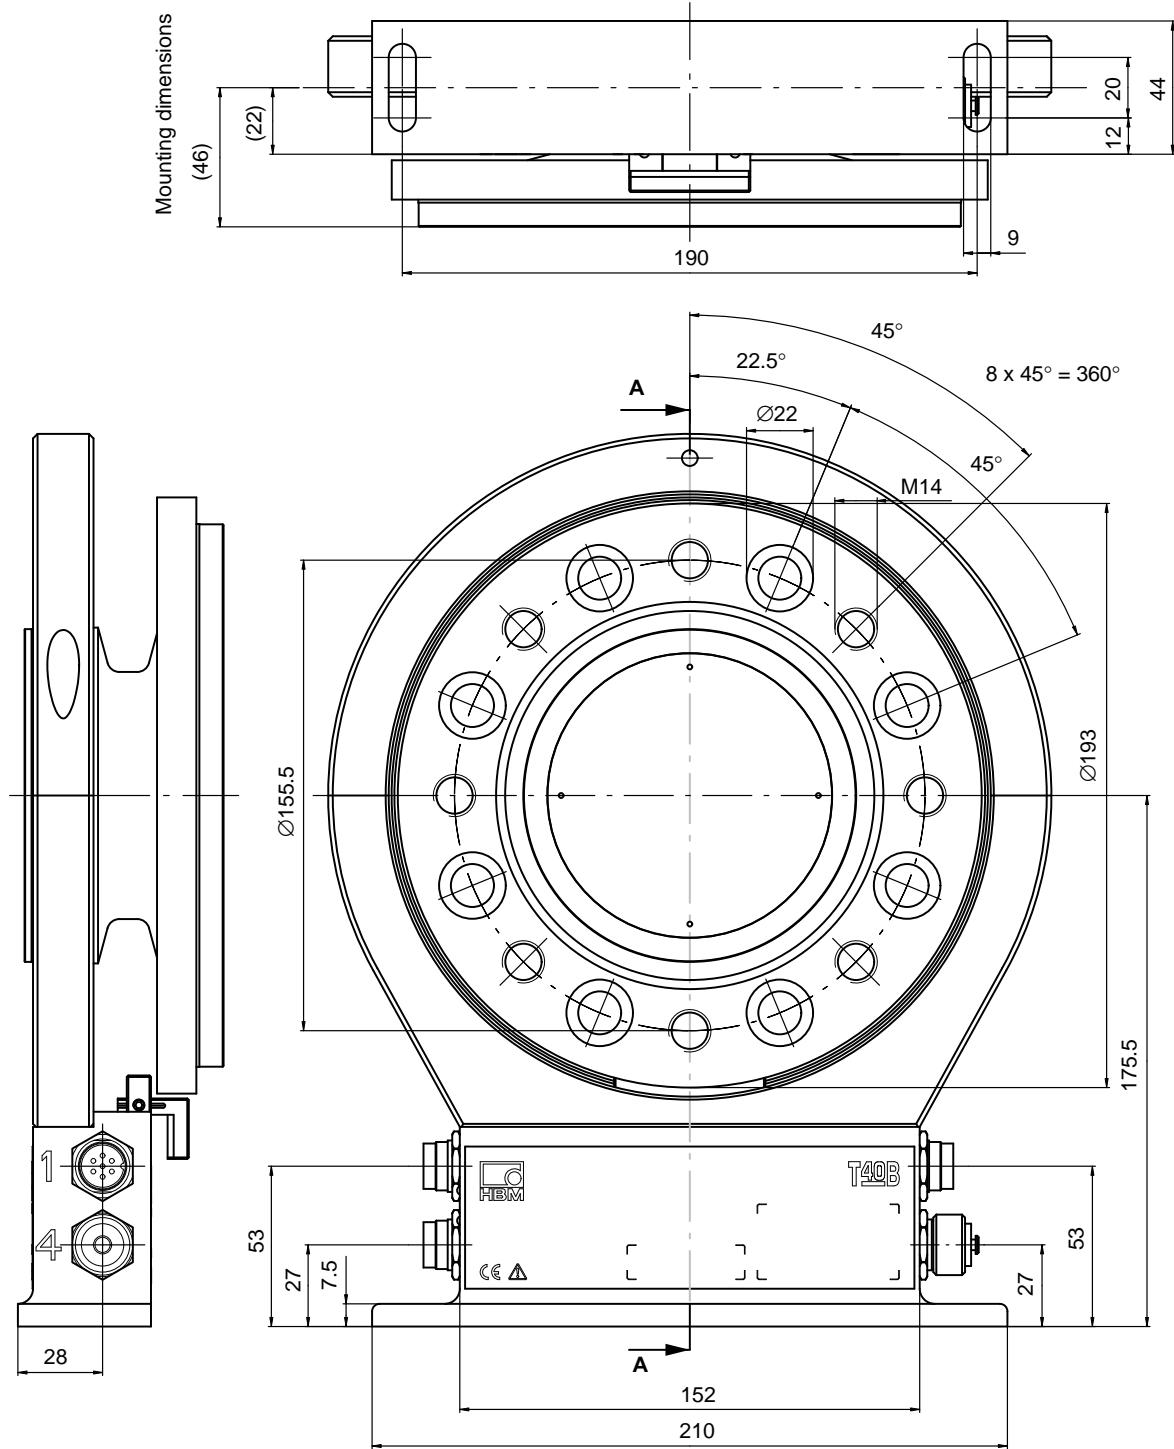

Dimensions of T40B/5 kNm with rotational speed measurement and reference signal, Option 7, Code S, continued


Dimensions in mm (1 mm = 0.03937 inches)

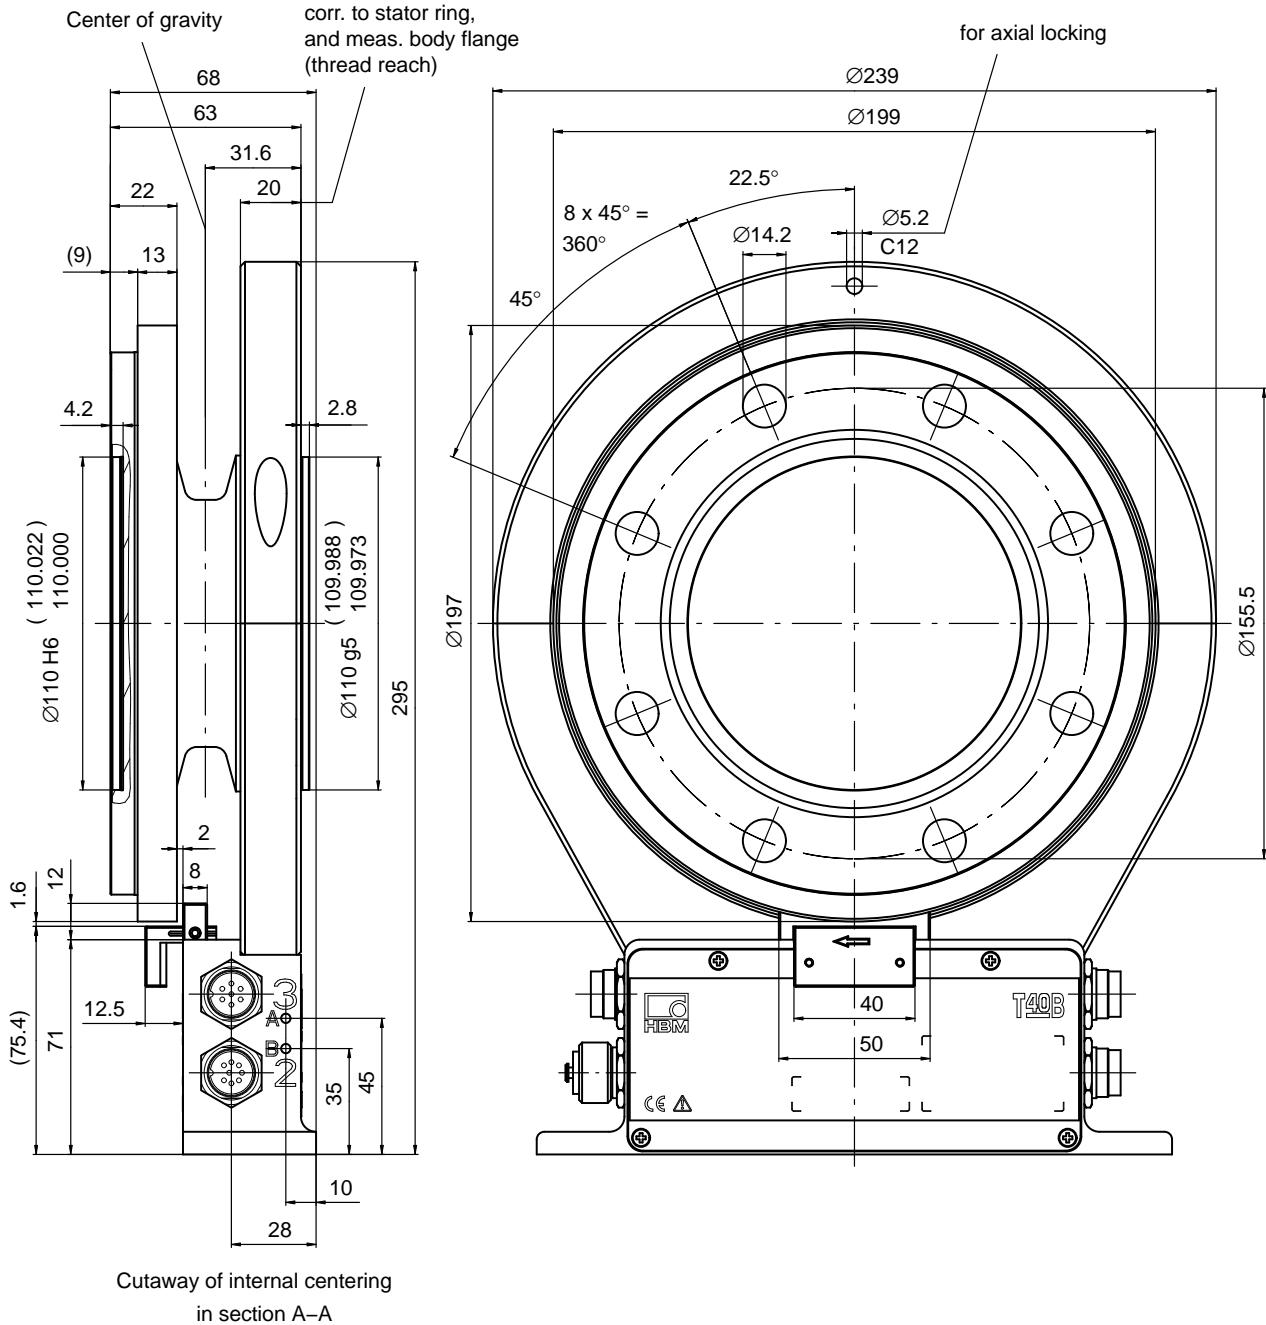

**Dimensions of T40B/5 kNm with rotational speed measurement and reference signal,
Option 7, Code U**

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm


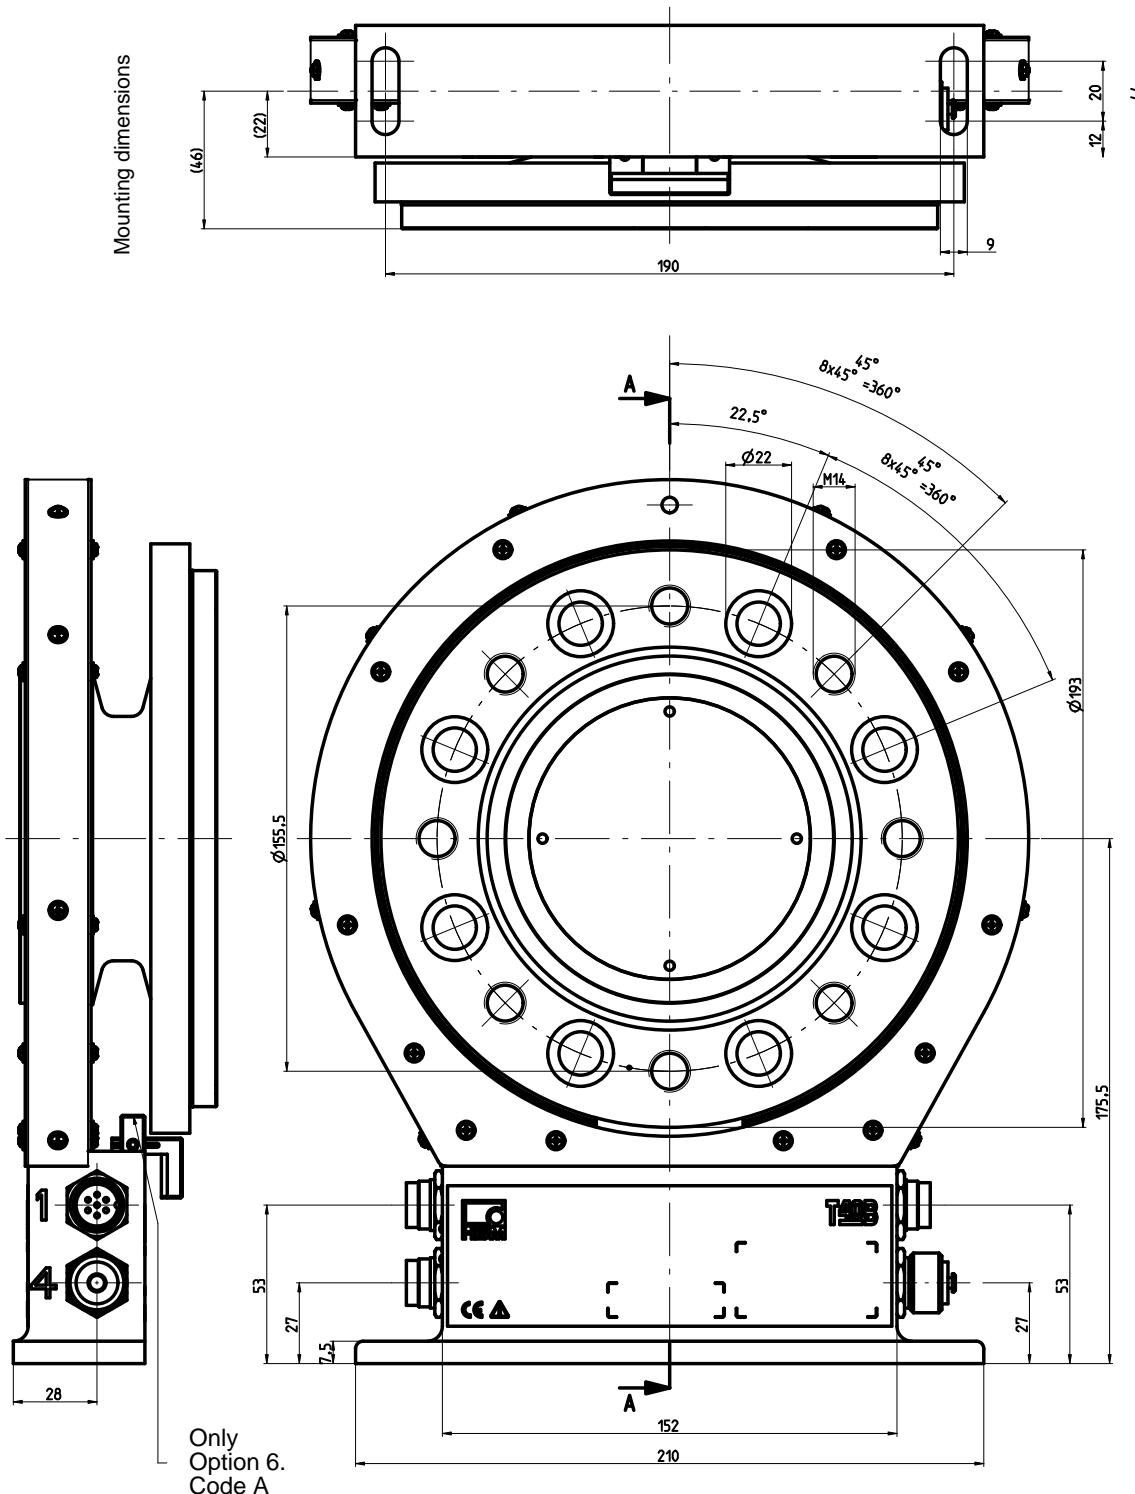


**Dimensions of T40B/5 kNm with rotational speed measurement and reference signal,
Option 7, Code U, continued**

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm


corr. to stator ring and
meas. body flange see
Option 7 , Code S

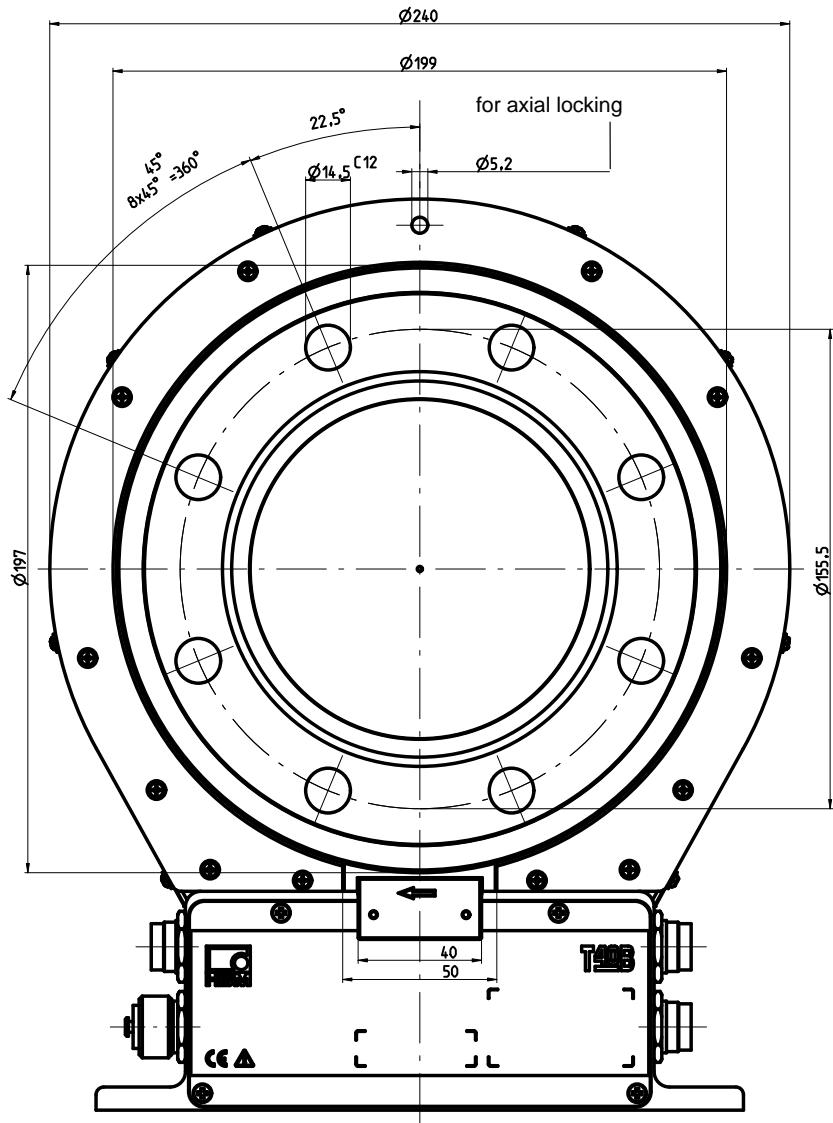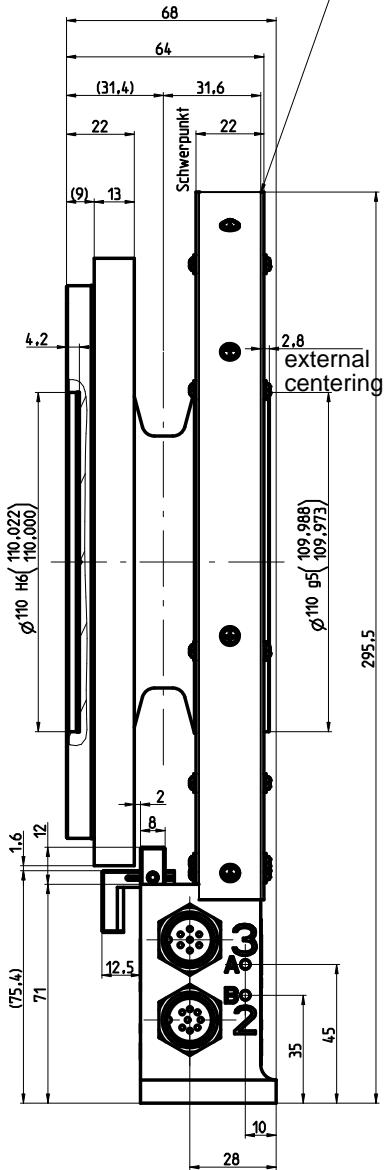

Cutaway of internal centering
in section A-A


**Dimensions of T40B/10 kNm with rotational speed measurement and reference signal,
Option 7, Code S**

Dimensions in mm (1 mm = 0.03937 inches)

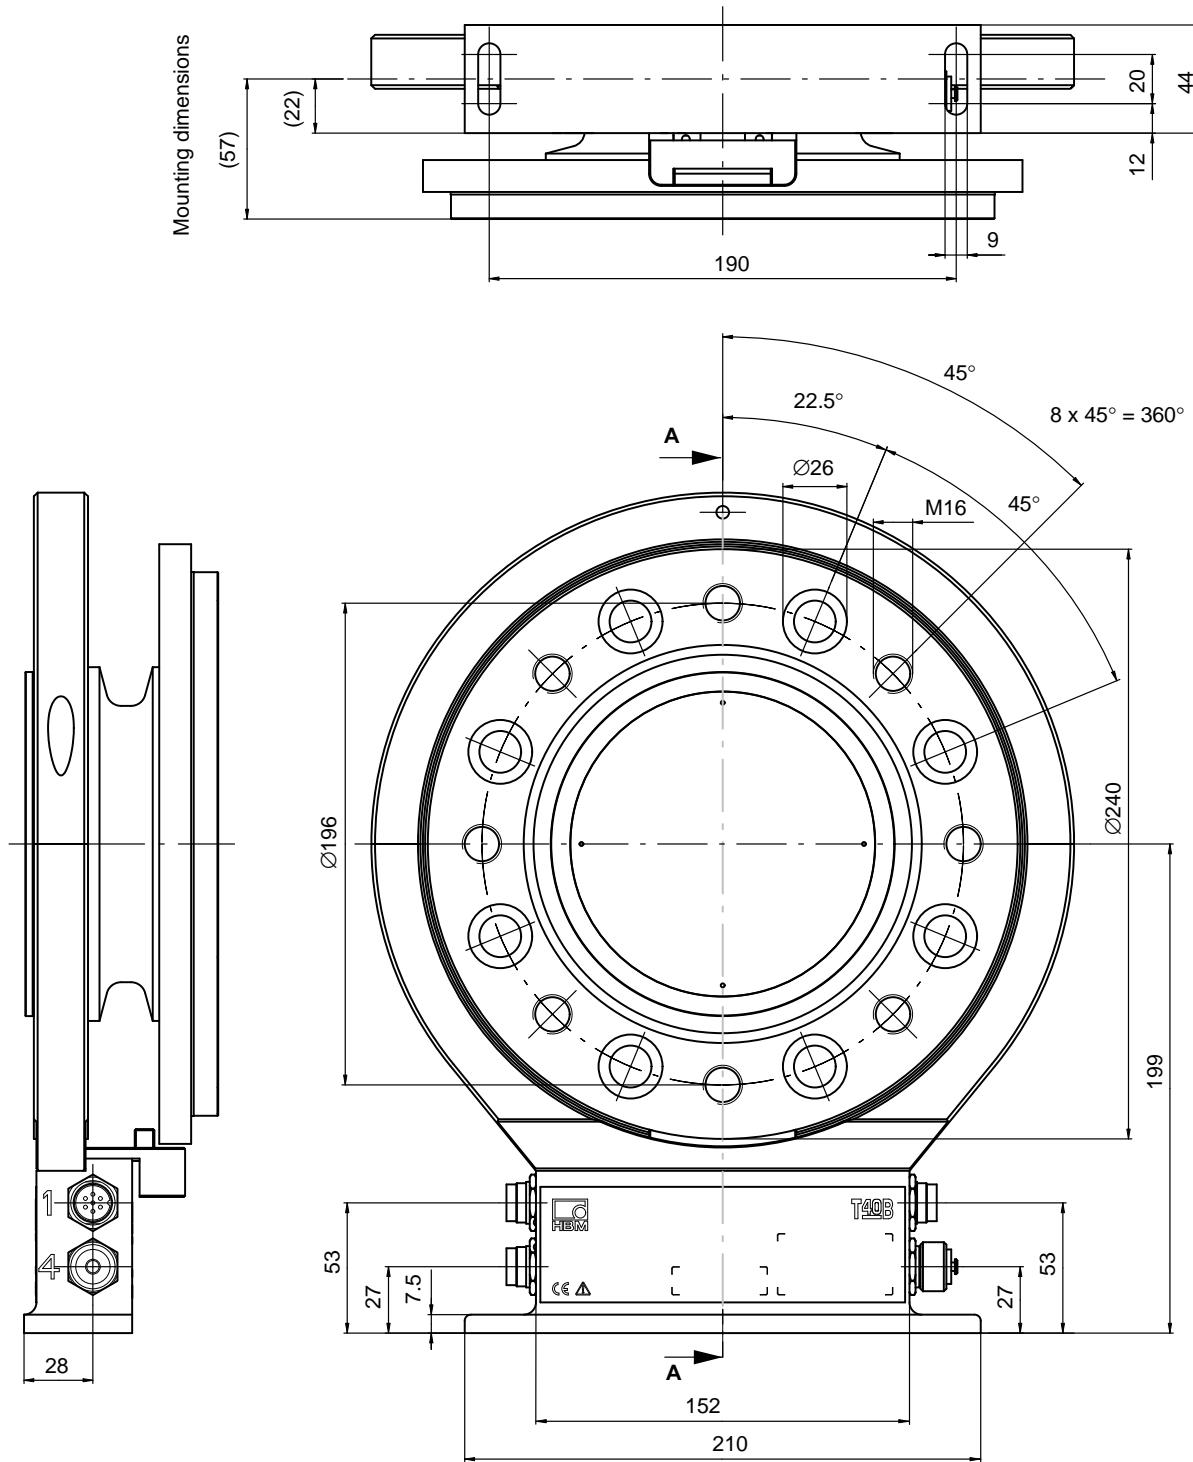

**Dimensions of T40B/10 kNm with rotational speed measurement and reference signal,
Option 7, Code S, continued**

Dimensions in mm (1 mm = 0.03937 inches)

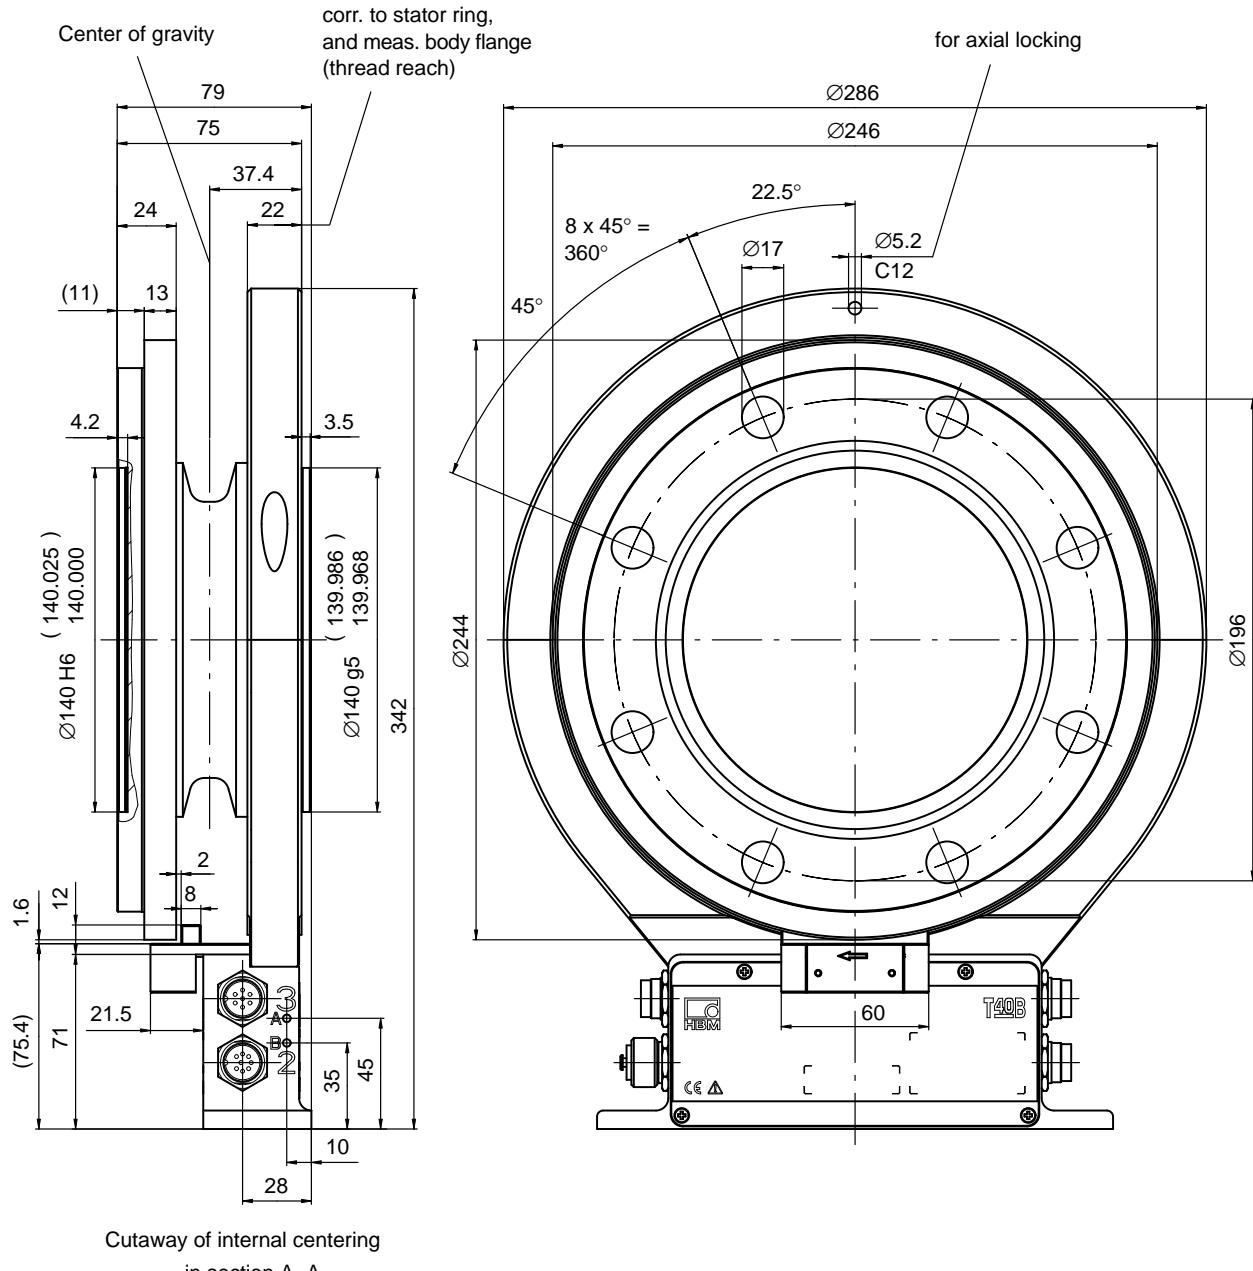


**Dimensions of T40B/10 kNm with rotational speed measurement and reference signal,
Option 7, Code U**



Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

Mounting dimensions

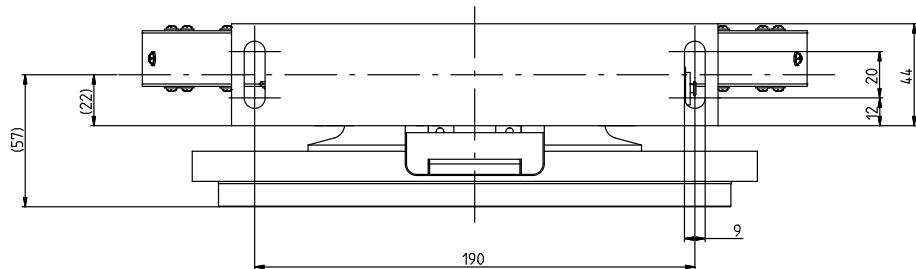

Only
Option 6.
Code A

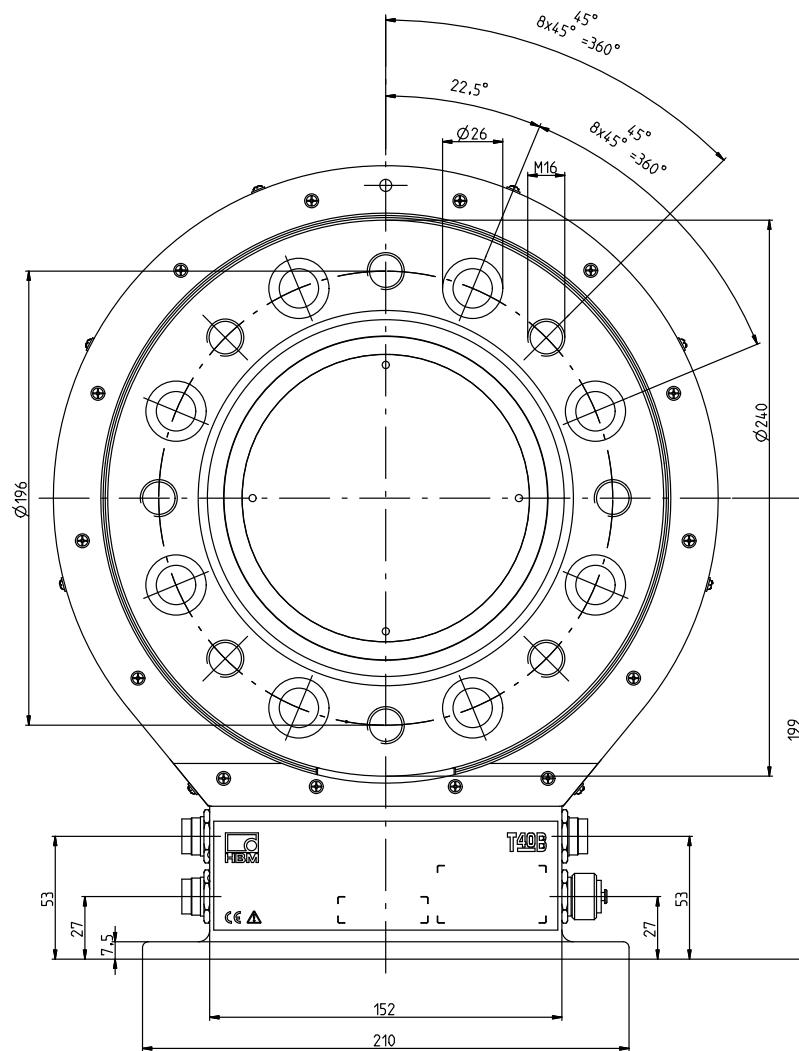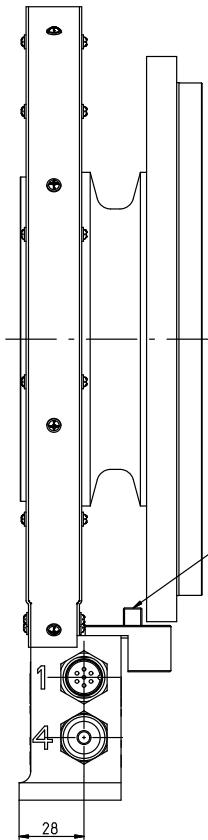


**Dimensions of T40B/10 kNm with rotational speed measurement and reference signal,
Option 7, Code U, continued**

Dimensions in mm (1 mm = 0.03937 inches)

Screw head height (Shielding plates) = 2.5 mm

corr. to stator ring and
meas. body flange see
Option 7 , Code S

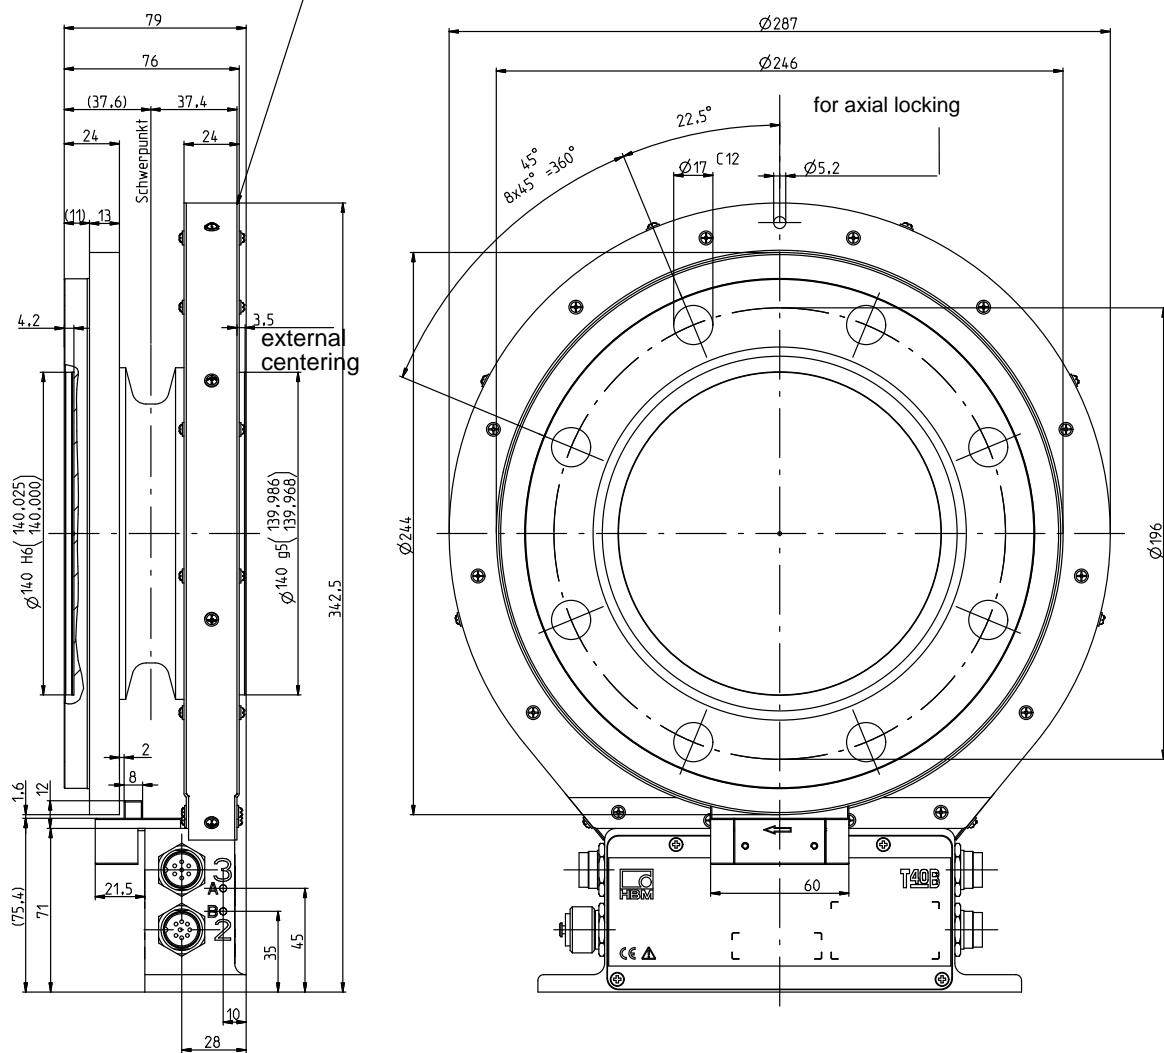

Cutaway of internal centering
in section A-A

Ordering numbers

K-T40B		[only with Option 2 = MF / ST]
Code	Option 1: Measuring range up to	
050Q	50 N·m	[only with Option 2 = MF / RO]
100Q	100 N·m	[only with Option 2 = MF / RO]
200Q	200 N·m	[only with Option 2 = MF / RO]
500Q	500 N·m	[only with Option 2 = MF / RO]
001R	1 kN·m	[only with Option 2 = MF / RO]
002R	2 kN·m	[only with Option 2 = MF / RO]
003R	3 kN·m	[only with Option 2 = MF / RO]
005R	5 kN·m	[only with Option 2 = MF / RO]
010R	10 kN·m	[only with Option 2 = MF / RO]
Code	Option 2: Component	
MF	Measurement flange, complete	
RO	Rotor	
ST	Stator	
Code	Option 3: Accuracy	
S	Standard	
Code	Option 4: Nominal speed range	
M	Standard speed	
H	High speed	
Code	Option 5: Electrical configuration [only with Option 2 = MF / ST]	
SU2	10 kHz ±5 kHz and ±10 V output signal, 18...30 V DC supply voltage	
DU2	60 kHz ±30 kHz and ±10 V output signal, 18...30 V DC supply voltage	
HU2	240 kHz ±120 kHz and ±10 V output signal, 18...30 V DC supply voltage	
Code	Option 6: Rotational speed measuring system	
0	Without rot. speed measuring system	
1	Magnetic rot. speed measuring system; 1024 pulses/revolution	
A	Magnetic rot. speed measuring system; 1024 pulses/revolution with reference pulse	
Code	Option 7: Customised modification	
S	No customer-specific modification	
U	US & Canada Version	
K-T40B-	[] - [] - S - M - [] - [] - S	[] = PREFERENCE Types

Accessories, to be ordered separately

Article	Order no.
Connection cable, set	
Torque connection cable, Binder 423 – D-Sub 15P, 6 m	1-KAB149-6
Torque connection cable, Binder 423 – free ends, 6 m	1-KAB153-6
Rotational speed connection cable, Binder 423 – 8-pin, free ends, 6 m	1-KAB154-6
Rotational speed connection cable, Binder 423 – 8-pin D-Sub, free ends, 6 m	1-KAB163-6
Rotational speed connection cable, reference signal, Binder 423 – 15-pin D-Sub, 6 m	1-KAB163-6
Rotational speed connection cable, reference signal, Binder 423 – 8-pin, free ends, 6 m	1-KAB164-6
TMC connection cable, Binder 423 – 16-pin, free ends, 6 m	1-KAB174-6
Cable sockets	
423G-7S, 7-pin (straight)	3-3101.0247
423W-7S, 7-pin (angular)	3-3312.0281
423G-8S, 8-pin (straight)	3-3312.0120
423W-8S, 8-pin (angular)	3-3312.0282
Connection cable, by the meter (min. order quantity: 10 m, price per meter)	
Kab8/00-2/2/2	4-3301.0071

Subject to modifications.
All product descriptions are for general information only. They
are not to be understood as a guarantee of quality or durability.

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45 · 64293 Darmstadt · Germany
Tel. +49 6151 803-0 · Fax: +49 6151 803-9100
Email: info@hbm.com · www.hbm.com

measure and predict with confidence

