

T10FH

Torque Flange



Non-rotating version




Rotating version

Special features

- Nominal (rated) torques:
100 kN·m, 130 kN·m, 150 kN·m,
200 kN·m, 250 kN·m, 300 kN·m
- Nominal (rated) speeds from
2,000 rpm to 3,000 rpm
- Short design
- Version for rotating and
non-rotating use
- Without bearings or slip rings
- Options:
magnetic speed measuring sys-
tem, 180 pulses/revolution;
DKD calibration certificate per
DIN 51309 or EA-10/14: class 0.5

Installation example

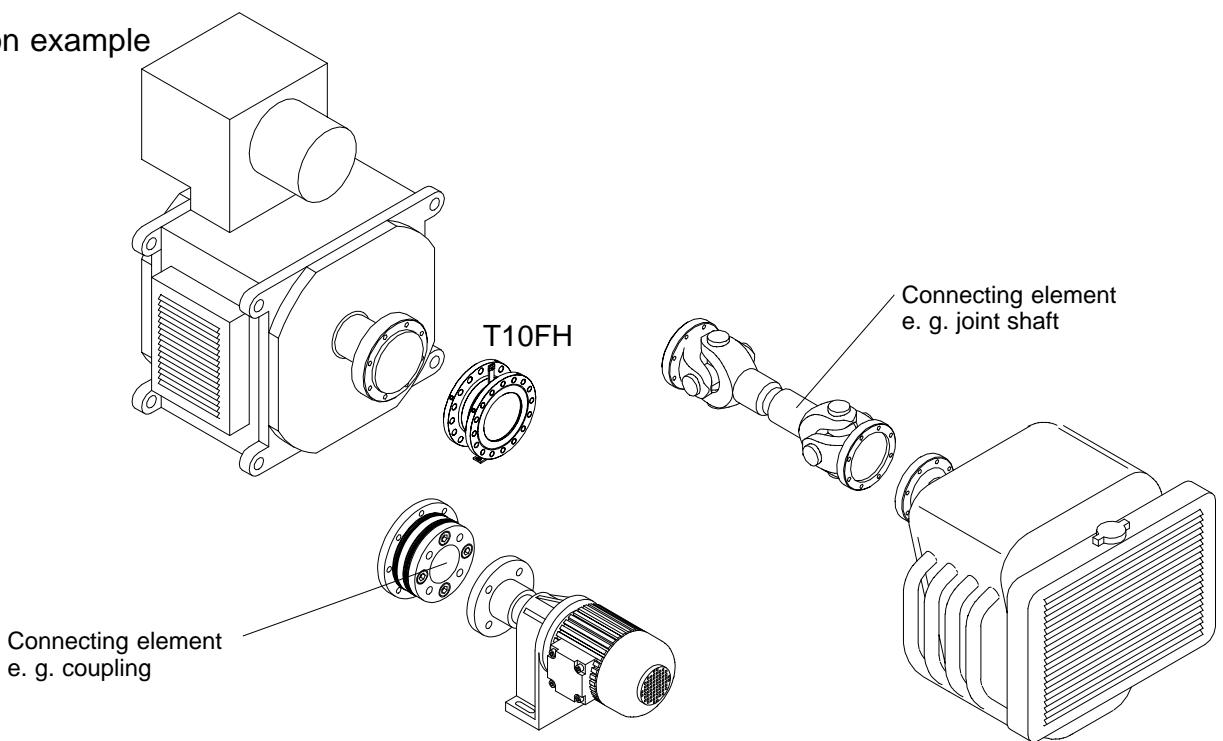

Specifications

Type	T10FH (rotating); option 2, code L							
Accuracy class	0.1							
Torque measuring system								
Nominal (rated) torque M_{nom} for reference only	kN·m kft-lb	100 73.8	130 95.9	150 110.6	200 147.5	250 184.4	300 221.3	
Nominal (rated) sensitivity (range between torque = zero and nominal (rated) torque) Frequency output Voltage output	kHz V			5 ± 10				
Sensitivity tolerance (deviation of the actual output value at M_{nom} of nominal (rated) sensitivity) Frequency output in conjunction with HBM test report in conjunction with DKD calibration certificate per DIN 51309 or EA-10/14	%		± 0.25			± 0.4		
Voltage output in conjunction with HBM test report in conjunction with DKD calibration certificate per DIN 51309 or EA-10/14	%		± 0.1			± 0.1		
Output signal at torque = zero Frequency output Voltage output	kHz V		± 0.35			± 0.5		
Nominal (rated) output signal Frequency output with positive nominal (rated) torque with negative nominal (rated) torque	kHz kHz		± 0.2			± 0.2		
Voltage output with positive nominal (rated) torque with negative nominal (rated) torque	V V							
Load resistance Frequency output Voltage output	kΩ kΩ			+10 -10				
Long-term drift over 48 h Voltage output	mV				± 3			
Measurement frequency range Voltage output	Hz				0 ... 1000 (-3 dB)			
Group delay time Frequency output Voltage output	ms ms					0.15 0.9		
Residual ripple related to nominal (rated) sensitivity	mV					40 (peak-to-peak)		
Temperature influence per 10 K in the nominal temperature range								
on the output signal, related to the actual value of signal span Frequency output Voltage output	% %					± 0.1 ± 0.2		
on the zero signal, related to the nom. sensitivity Frequency output Voltage output	% %					± 0.05 ± 0.15		
Max. modulation range²⁾ Frequency output Voltage output	kHz V				4 ... 16 -10.5 ... +10.5 (typ. ± 11)			
Power supply Nominal (rated) supply voltage (protective low voltage)	V (DC)					18 ... 30		
Current consumption in measuring mode in start-up mode	A A					< 0.9 < 2		
Nominal (rated) power consumption	W					< 12		

1) RS 422 complementary signals; factory settings

2) Output signal range with a repeatable relationship between torque and output signal.

Specifications

Nominal (rated) torque M_{nom} for reference only	kN·m kft-lb	100 73.8	130 95.9	150 110.6	200 147.5	250 184.4	300 221.3
Linearity deviation including hysteresis, related to the nominal (rated) sensitivity Frequency output Voltage output	% %			± 0.1	± 0.1		
Rel. standard deviation of the reproducibility , per DIN 1319, by reference to variation of the output signal Frequency output Voltage output	% %			± 0.02	± 0.03		
Shunt signal Tolerance of shunt signal related to the nominal (rated) sensitivity in conjunction with HBM test report in conjunction with DKD calibration certificate per DIN 51309 or EA-10/14	% %		approx. 50 % of M_{nom} ; value given to the identification plate	± 0.13	± 0.02	± 0.2	± 0.05
Speed measuring system							
Measuring system			Magnetic field dependent resistor and gear ring				
Mechanical increments (pulses per revolution) Output signal	Number V		180 5 symmetric ³⁾ ; 2 x 180 square wave signals approx. 90° phase shifted				
Minimum speed for sufficient pulse stability	rpm		> 2				
Load resistance	kΩ		> 5				
Group delay time	μs		< 5				
Hysteresis of reversing the direction of rotation with relative vibrations between rotor and stator Torsional rotor vibrations	degree		10				
Max. permissible static eccentricity of the rotor (radially) relative to stator center without speed measuring system with speed measuring system	mm mm		± 2 ± 1				
Max. permissible axial displacement between rotor and stator without speed measuring system with speed measuring system	mm mm		± 3 ± 1.5				

³⁾ RS 422 complementary signals

Specifications

Type	T10FH (non-rotating); option 2, code N												
Accuracy class	0.1												
Torque measuring system													
Nominal (rated) torque M_{nom} for reference only	kN·m kft-lb	100 73.8	130 95.9	150 110.6	200 147.5	250 184.4	300 221.3						
Nominal (rated) sensitivity at M_{nom} (nominal (rated) signal range between torque= zero and nominal (rated) torque)	mV/V	1.1 ... 1.9 (The sensitivity is specified on the identification plate)											
Sensitivity tolerance (deviation of the actual output value at M_{nom} of nominal (rated) sensitivity) in conjunction with HBM test report in conjunction with DKD calibration certificate per DIN 51309 or EA-10/14	%	± 0.25		± 0.4		± 0.1							
Temperature influence per 10 K in the nominal temperature range	%												
on the output signal, related to the actual value of signal span	%	± 0.1											
on the zero signal, related to the nom. sensitivity	%	± 0.05											
Linearity deviation including hysteresis, related to the nominal (rated) sensitivity	%	± 0.1											
Rel. standard deviation of the reproducibility , per DIN 1319, relative to variation of the output signal	%	± 0.02											
Input resistance at reference temperature	Ω	1550 ± 100											
Output resistance at reference temperature	Ω	1300 ... 1500											
Reference excitation voltage	V	5											
Operating range of the excitation voltage	V	2.5 ... 12											
Transducer identification	-	TEDS per IEEE 1451.4											

Specifications

General data							
Nominal (rated) torque M_{nom} for reference only	kN·m kft-lb	100 73.8	130 95.9	150 110.6	200 147.5	250 184.4	300 221.3
EMC EME (Emission per EN61326-1, table 4) RFI field strength	–						Class B
Immunity from interference (EN61326-1, table A.1)	V/m A/m						
Electromagnetic field AM				10			
Magnetic field				30			
ESD							
Contact discharge	kV			4			
Air discharge	kV			8			
Burst	kV			1			
Surge	kV			1			
Line-conducted disturbance (AM)	V			3			
Degree of protection per EN 60529	–			IP 54			
Nominal temperature range	°C [°F]			+10...+60 [+50...+140]			
Reference temperature	°C [°F]			+23 [73.4]			
Service temperature range	°C [°F]			+10...+60 [+50...+140]			
Storage temperature range	°C [°F]			-20...+70 [-4...+158]			
Mechanical shock; test severity level to DIN IEC 60068-2-27; IEC 68-2-29-1987	n ms m/s ²			1000 3 650			
Number of impacts	n			1000			
Duration	ms			3			
Acceleration	m/s ²			650			
Vibrational stress; test severity level to DIN IEC 60068-2-6; IEC 68-2-6-1982	Hz h m/s ²			5 ... 65 1.5 50			
Frequency range	Hz			5 ... 65			
Duration	h			1.5			
Acceleration	m/s ²			50			
Nominal (rated) speed ^{a)}	rpm		3000				2000
Load limits ¹⁾							
Limit torque	kN·m		200				400
Breaking torque	kN·m		> 300				> 600
Axial limit force	kN		230				290
Lateral force limit	kN		110				240
Bending limit moment	kN·m		22				35
Oscillation bandwidth per DIN 50100 (peak-to-peak)	kN·m		200				400
upper maximum torque	kN·m		+150				+300
lower maximum torque	kN·m		-150				-300

^{a)} Only with option 2, code L

¹⁾ Each type of irregular stress can only be permitted with its given static load limit (bending moment, lateral or axial load, exceeding the nominal (rated) torque) if none of the others can occur. Otherwise the limit values must be reduced. If for instance 30 % of the bending limit moment and also 30 % of the lateral limit force are present, only 40 % of the axial limit force are permitted, provided that the nominal (rated) torque is not exceeded. With the permitted bending moments, axial, and lateral limit forces, measuring errors of about 1 % of the nominal (rated) torque can occur. If the nominal (rated) torque is exceeded, ensure that the maximum modulation range of the signal output electronics is being observed.


Mechanical values							
Nominal (rated) torque M_{nom} for reference only	kN·m kft-lb	100 73.8	130 95.9	150 110.6	200 147.5	250 184.4	300 221.3
Torsional stiffness c_T	kN·m/rad	84000			169500		
Axial stiffness c_a	kN/mm	1250			2850		
Radial stiffness c_r	kN/mm	2500			4300		
Stiffness with bending moment about a radial axis c_b	kN·m/rad	17500			49600		
Maximum deflection at axial limit force	mm	< 0.5					
Additional max. concentricity error at lateral limit force	mm	< 0.1					
Additional plane-parallel deviation at bending limit moment	mm	< 1					
Balance quality-level to DIN ISO 1940 ¹⁾		G 6.3					
Max. limits for relative shaft vibration (peak-to-peak) ¹⁾²⁾	µm	$s_{\text{max}} = \frac{4500}{\sqrt{n}}$ (n in rpm)					
Mass moment of inertia of the rotor L_v (about axis of rotation)	kg·m ²	2			5.2		
Proportional mass moment of inertia for transmitter side, approx.	%	55			53		
Weight, approx. Rotor Stator ¹⁾	kg kg	84			1.4		

1) Rotating; option 2, code L


2) Relative undulation in the area of the connection flanges per DIN 45670/VDI 2059

Supplementary information for classification through DKD calibration certificate per DIN 51309 or EA-10/14			
Class		0.5	
Rel. zero error (zero signal return)	%	$< \pm 0.125$ (typically < 0.05)	
Repeatability $0.1 \cdot M_{\text{nom}}$ to M_{nom} (rel. repeatability error without rotation)	%	< 0.25 (typically < 0.125)	
Reproducibility $0.1 \cdot M_{\text{nom}}$ to M_{nom} (rel. reproducibility error with rotation)	%	< 0.5 (typically < 0.25)	
Relative reversibility error ($0.1 \cdot M_{\text{nom}}$ to M_{nom})	%	< 0.63 (typically < 0.5)	

Dimensions Rotor T10FH rotating; option 2, code L (in mm; 1 mm=0.03937 inches)

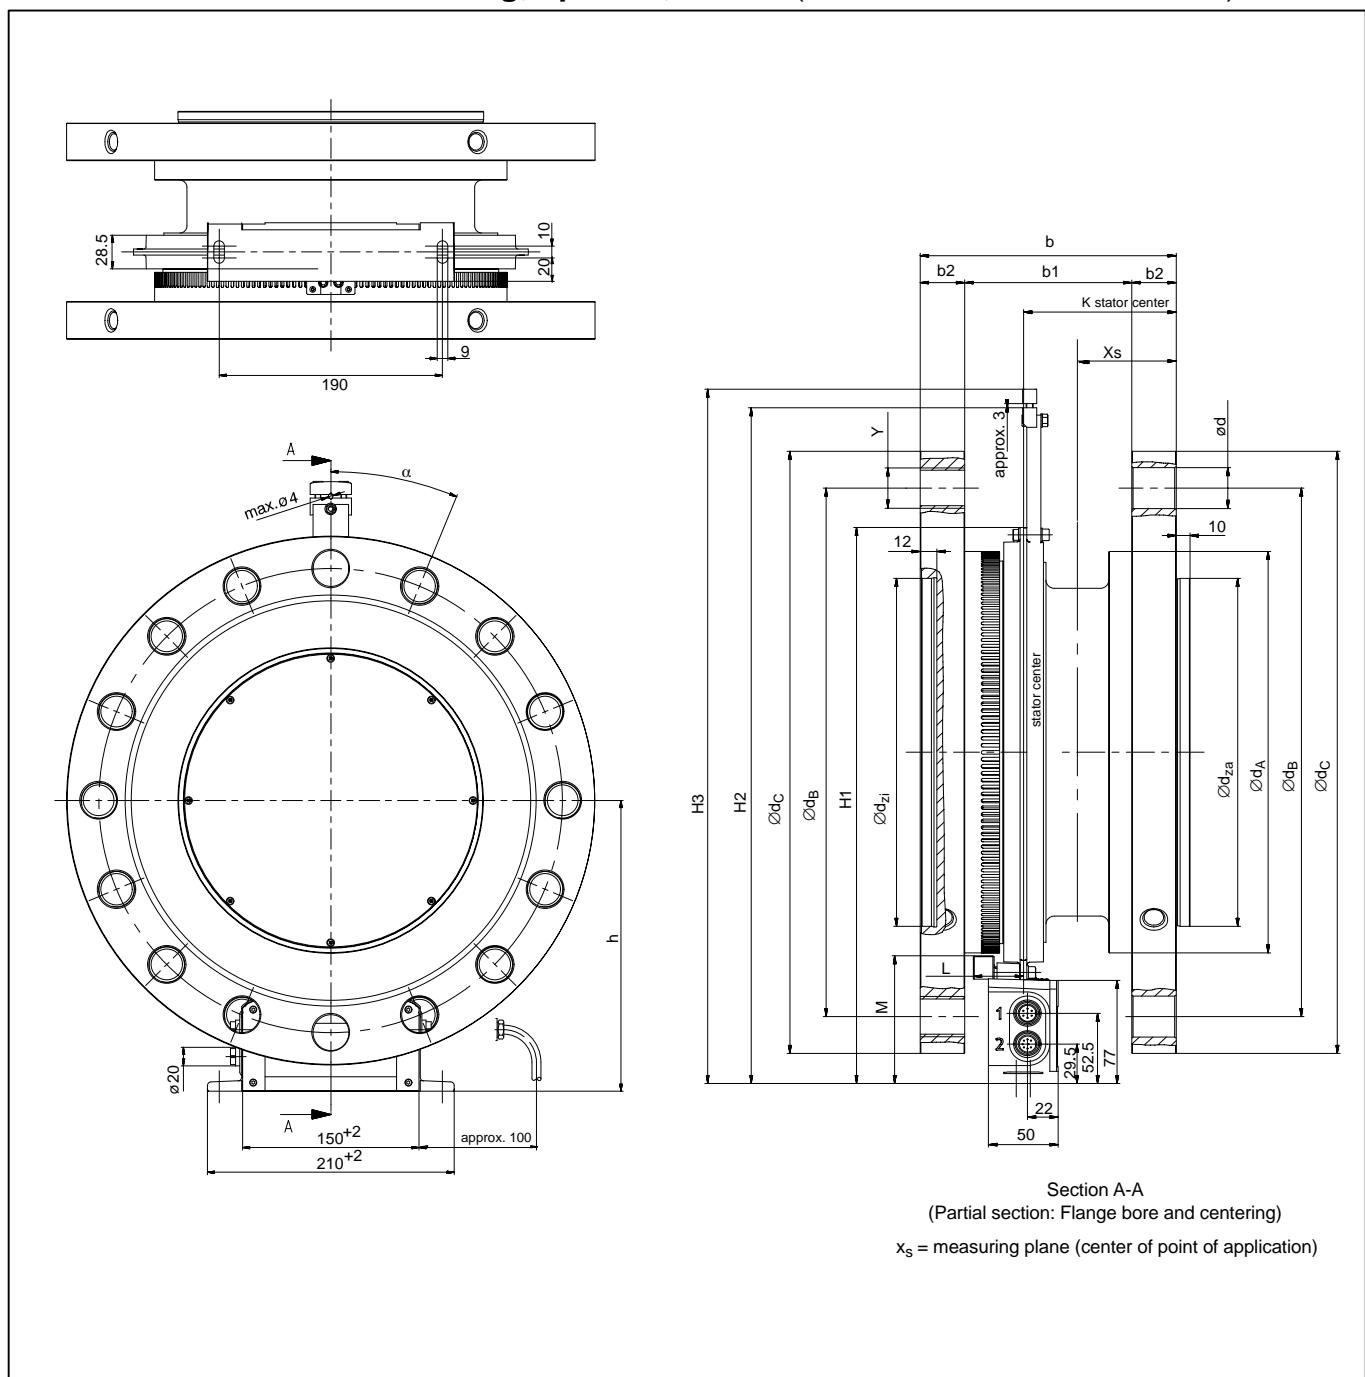


Dimensions Rotor T10FH non-rotating; option 2, code N (in mm; 1 mm=0.03937 inches)

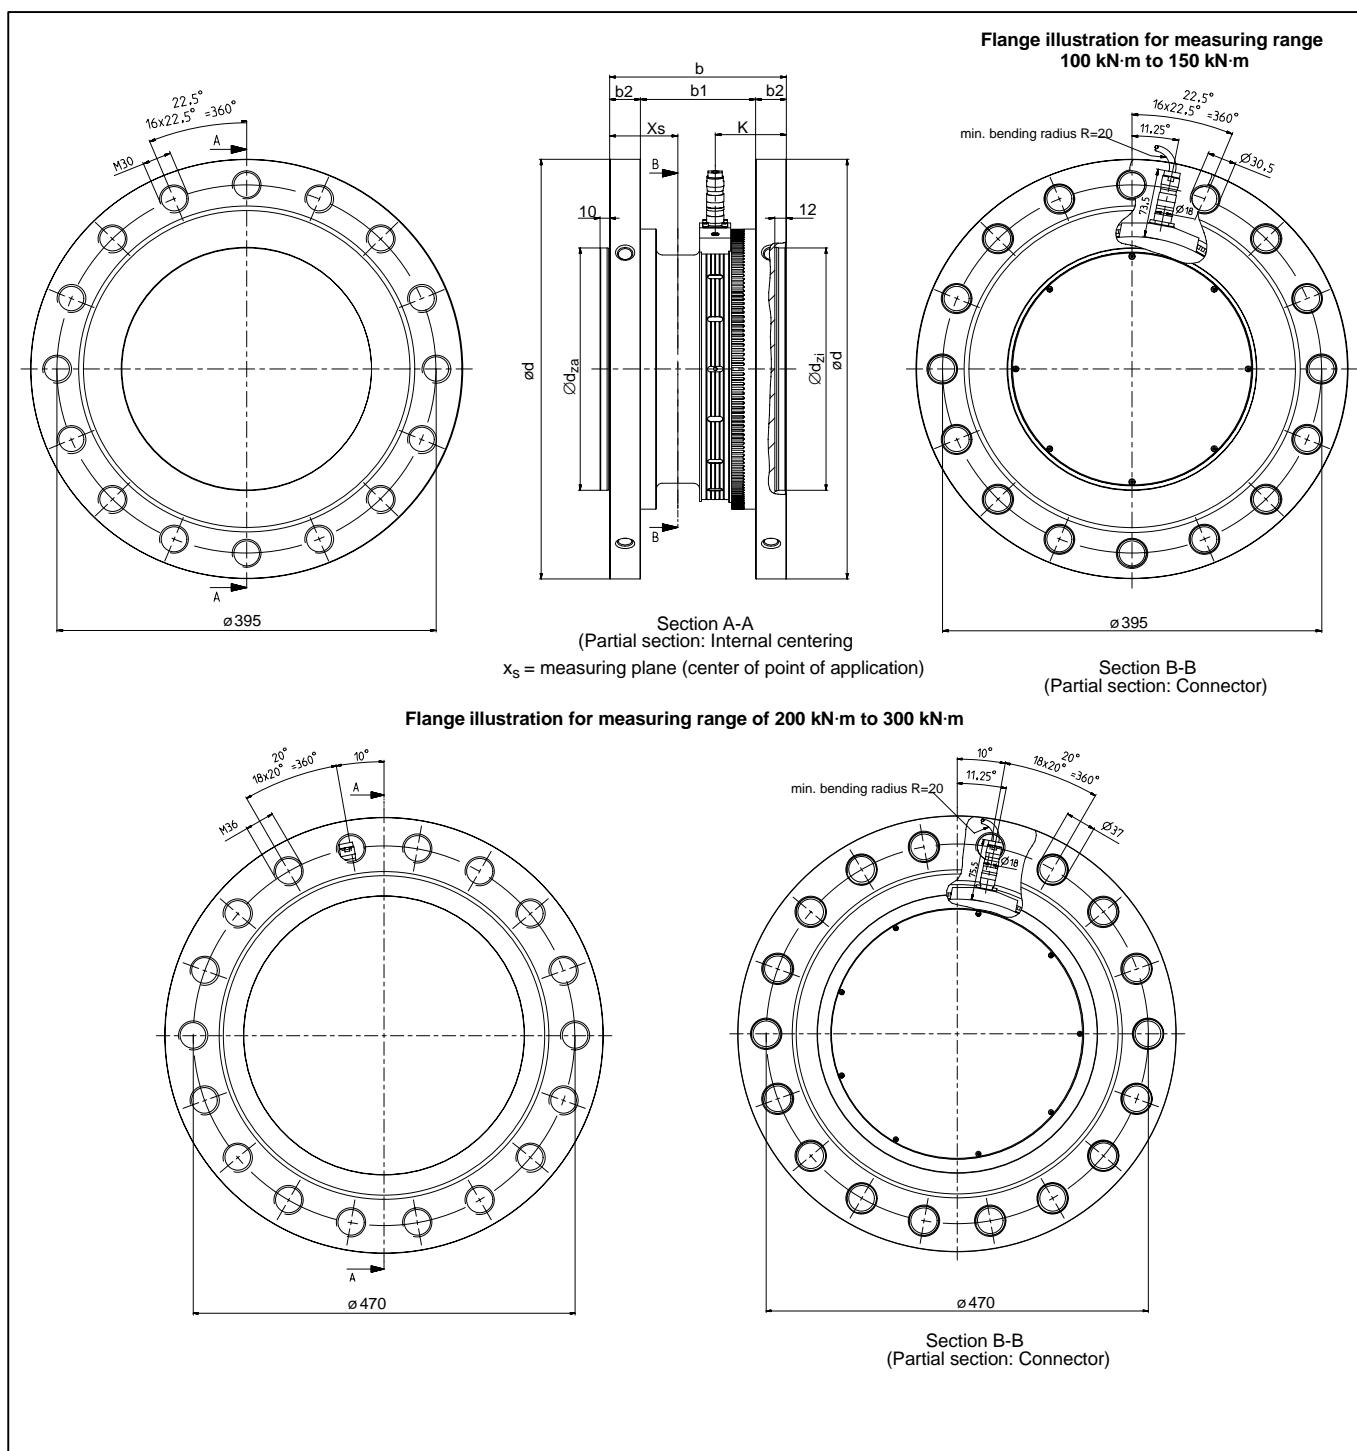


Measuring range (kN·m)	Dimensions in mm							
	b	b1	b2	Ød	Ød _{za} H7	Ød _{zi} H7	K	X _s
100								
130								
150								
200								
250								
300								
	184	120	32	450	260	260	74.3	71
	230	150	40	540	345	345	90	98


Flatness and concentricity tolerances

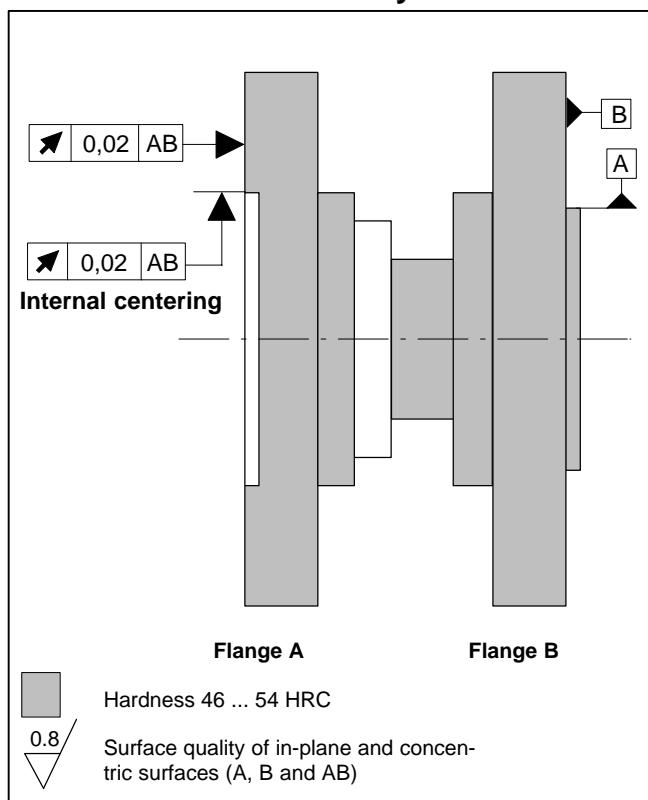

Area free of metal parts

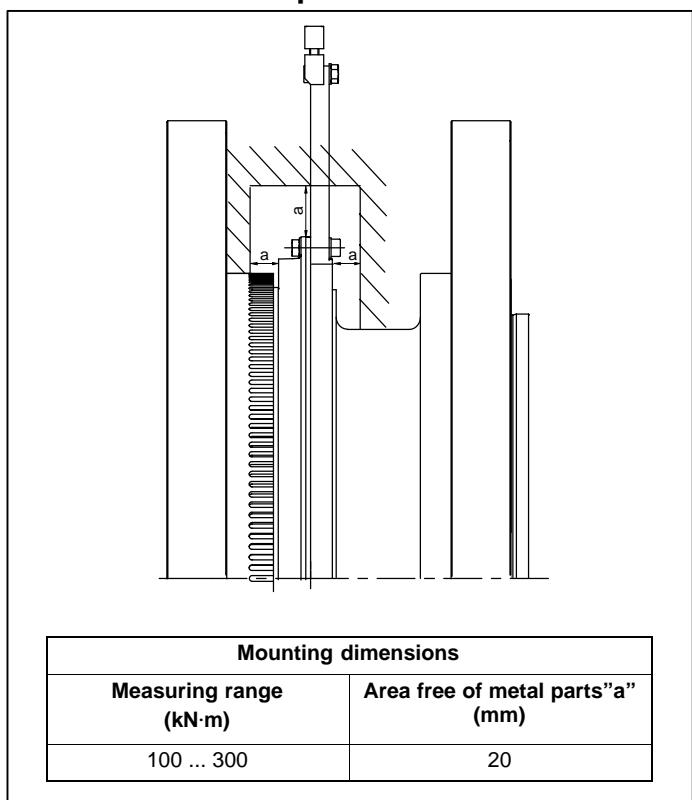


Screw fitting of the rotor

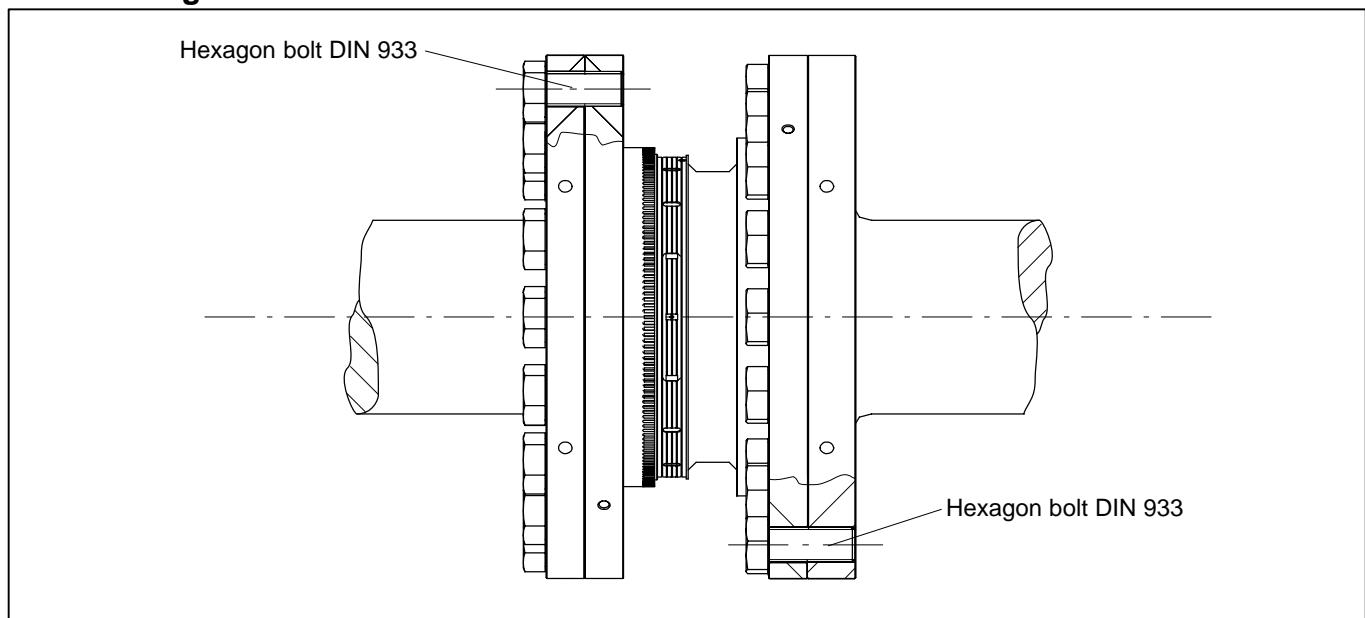

Measuring range (kN·m)	Fastening bolts ¹⁾	Fastening bolts class	Maximum number of bolts per flange	Prescribed tightening torque (N·m)
100 130 150	M30	12.9	16	2450
200 250 300	M36		18	4250

¹⁾ DIN 933; bk/oiled/ $\mu_{\text{tot}}=0.125$

Order number

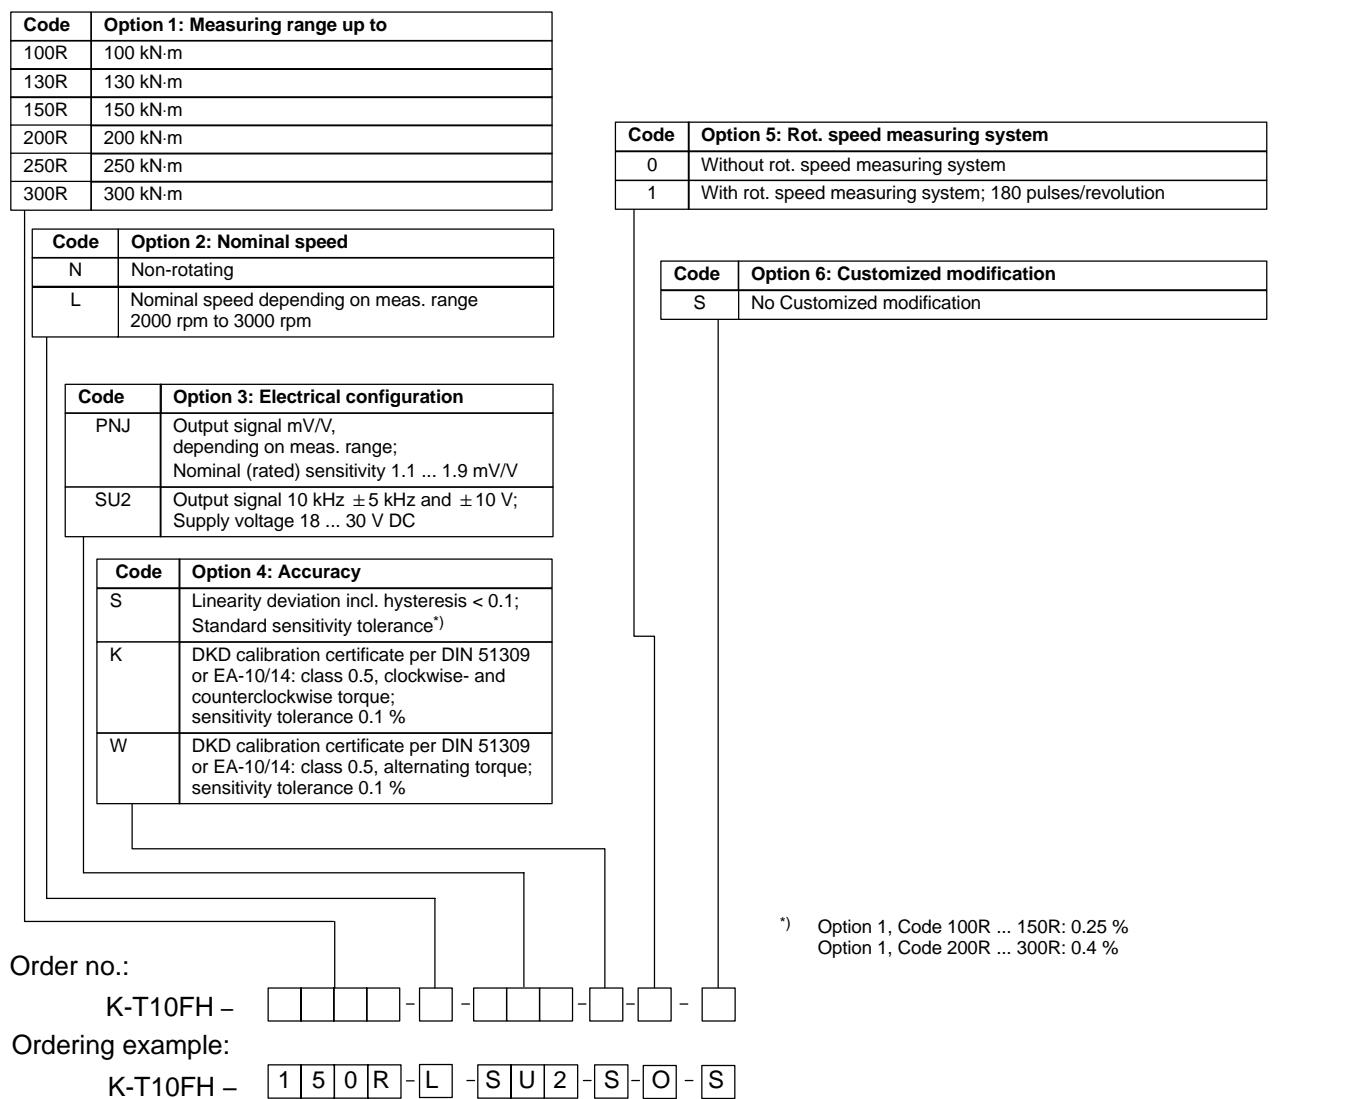

Accessories, to be ordered separately:

Item	Order-No.
Ready made connecting cables	
Torque (rotating); option 2, code L	
Connecting cable torque, Binder 423 7-pole – D-Sub 15-pole, 6 m	1-KAB149-6
Connecting cable torque, Binder 423 – free ends, 6 m	1-KAB153-6
Torque (non-rotating); option 2, code N	
Connecting cable torque, Binder 423 – free ends, 6 m	1-KAB139A-6
Rotational speed	
Connecting cable rot. speed, Binder 423 8-pole – D-Sub 15-pole, 6 m	1-KAB150-6
Connecting cable rot. speed, Binder 423 8-pole – free ends, 6 m	1-KAB154-6
Male/female cable connectors	
Torque	
423G-7S cable socket, 7-pole, straight cable entry, for torque output	3-3101.0247
423W-7S cable socket, 7-pole, 90° cable entry, for torque output	3-3312.0281
Rotational speed	
423G-8S cable socket, 8-pole, straight cable entry, for speed output	3-3312.0120
423W-8S cable socket, 8-pole, 90° cable entry, for speed output	3-3312.0282
Connecting cable, by the meter	
Kab8/00-2/2	4-3301.0071

Modifications reserved.

All details describe our products in general form only. They
are not to be understood as express warranty and do not
constitute any liability whatsoever.

B2031-2.0 en

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
Tel.: +49 6151 8030; Fax: +49 6151 803 9100
E-mail: support@hbm.com www.hbm.com



measurement with confidence