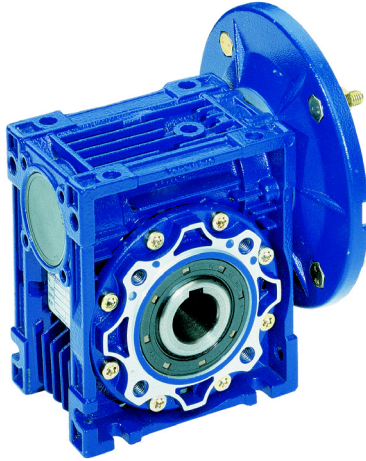
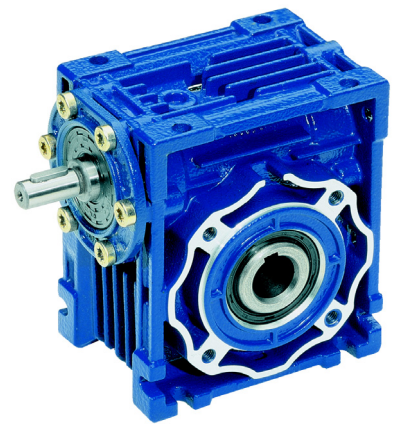


Worm geared motors and worm gear units
蜗轮蜗杆减速电机/减速机

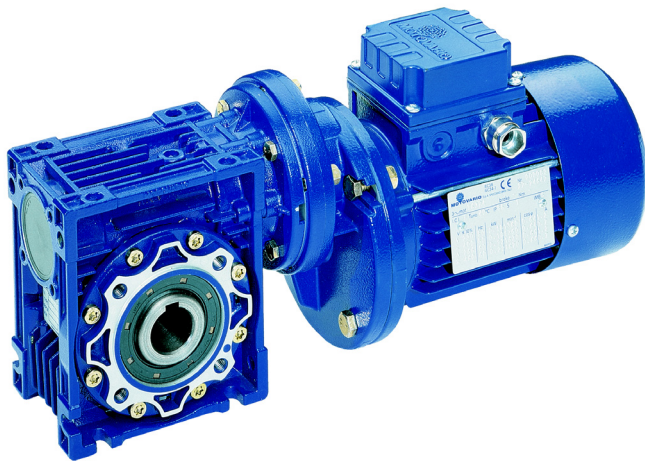
NMRV



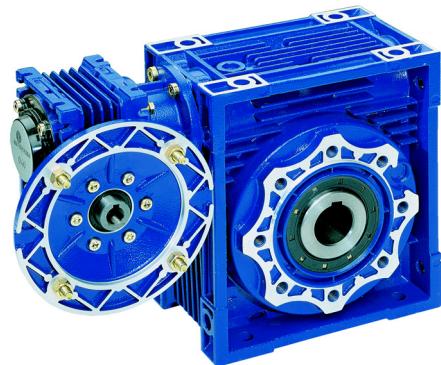
NMRV




NRV



PC+NMRV




NMRV+NMRV




Designation 选型说明

NMRV - NRV

NMRV	Worm geared motor 蜗轮蜗杆减速马达(连马达一起供应)		
NRV	Worm reduction unit 蜗轮蜗杆减速机(不含马达)		
050	Size 尺寸		
FA-FB-FC FD-FE	Output flange 输出法兰		
030	Reduction ratio 减速比		
PAM	Fitted for motor coupling 跟电机连接之法兰盘		
200	Motor flange diameter 电机法兰直径	19	Drive-shaft diameter 驱动轴直径
VS	Double input shaft 双输入轴	AS	Single output shaft 单输出轴
AB	Double output shaft 双输出轴	B3	Mounting position 安装位置
0,75 kW	Electric motor power 电机功率	4p	Electric motor polarity 电机(极数)
230/400V	Electric motor voltage 电机电压	50 Hz	Electric motor frequency 电机频率


Designation 选型说明
PC + NMRV


PC	Pre-stage helical module 速比3 :1 的前置减速装置		
71	Size 尺寸		
NMRV	Worm geared motor 蜗轮蜗杆减速电机(连马达一起供应)		
050	Size 尺寸		
FA-FB-FC FD-FE	Output flange 输出法兰		
300	Reduction ratio 减速比		
PAM	Fitted for motor coupling 与电机连接		
160	Motor flange diameter 电机法兰直径	14	Drive-shaft diameter 驱动轴直径
VS	Double input shaft 双输入轴	AS	Single output shaft 单输出轴
AB	Double output shaft 双输出轴	B3	Mounting position 安装位置
0,75 kW	Electric motor power 电机功率	4p	Electric motor polarity 电机转数(极数)
230/400V	Electric motor voltage 电机电压	50 Hz	Electric motor frequency 电机频率



Designation 选型说明

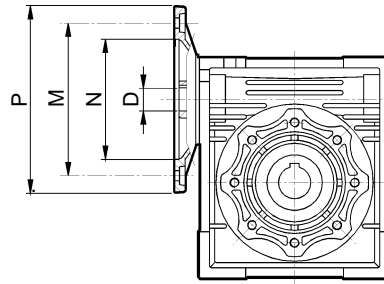
NMRV+NMRV - NRV+NMRV

NMRV + NMRV	Combined worm geared motor 蜗轮蜗杆减速电机组合 (两台)		
NRV + NMRV	Combined worm reduction unit 蜗轮蜗杆减速电机跟减速箱组合		
050/110	Size 尺寸		
FA-FB-FC FD-FE	Output flange 输出法兰		
900	Reduction ratio 减速比		
PAM	Fitted for motor coupling 与电机组合		
200	Motor flange diameter 电机法兰直径	19	Drive-shaft diameter 驱动轴直径
VS	Double input shaft 双输入轴	AS	Single output shaft 单输出轴
AB	Double output shaft 双输出轴	BS1	Execution 操作
B3	Mounting position 安装位置		
0,75 kW	Electric motor power 电机功率	4p	Electric motor polarity 电机 (极数)
230/400V	Electric motor voltage 电机电压	50 Hz	Electric motor frequency 电机频率




Predisposition 型号分析

(*) Low profile key supplied by Motovario
Motovario- 特殊尺寸的轴键 由摩多利厂供应

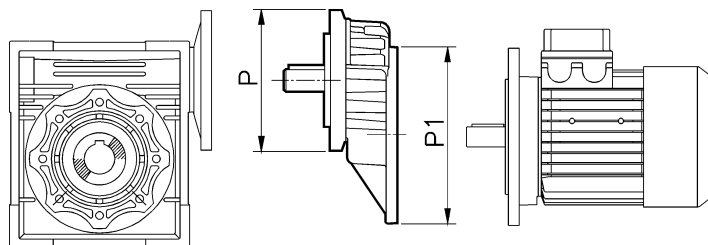


NMRV	PAM IEC	N	M	P	D											
					5	7,5	10	15	20	25	30	40	50	60	80	100
025	56B14	50	65	80	9	9	9	9	9	-	9	9	9	9	-	-
030	63B5	95	115	140	11	11	11	11	11	11	11	11	-	-	-	
	63B14	60	75	90												
040	71B5	110	130	160	14	14	14	14	14	14	14	14	-	-	-	-
	71B14	70	85	105												
	63B5	95	115	140									11	11	11	11
	63B14	60	75	90												
050	80B5	130	165	200	19	19	19	19	19	19	19	-	-	-	-	-
	80B14	80	100	120												
	71B5	110	130	160									14	14	14	
	71B14	70	85	105												
063	90B5	130	165	200	-	24	24	24	24	24	24	-	-	-	-	-
	90B14	95	115	140												
	80B5	130	165	200	-							19	19	19	-	-
	80B14	80	100	120												
075	100/112B5	180	215	250	-	28	28	28	-	-	-	-	-	-	-	-
	100/112B14	110	130	160												
	80B5	130	165	200	-	-	-	-					19	19	19	
	80B14	80	100	120												
090	100/112B5	180	215	250	-				28	28	28	-	-	-	-	-
	100/112B14	110	130	160												
	90B5	130	165	200	-							24	24	24	-	-
	90B14	95	115	140												
105	132B5	230	265	300	-	38*	38*	38*	38*	-	-	-	-	-	-	-
	100/112B5	180	215	250	-							28	28	28	-	-
	90B5	130	165	200	-	-	-	-	-					24	24	
110	132B5	230	265	300	-	38*	38*	38*	38*	-	-	-	-	-	-	-
	100/112B5	180	215	250	-							28	28	28	-	-
	90B5	130	165	200	-	-	-	-	-					24	24	
130	132B5	230	265	300	-					38*	38*	38*	-	-	-	-
	100/112B5	180	215	250	-	-	-	-	-					28	28	
150	160B5	250	300	350	-											
	132B5	230	265	300	-	-	-	-	-				38	38	38	38




PC+NMRV Combinations PC+NMRV 组合

NMRV	i	PC 063		PC 071		PC 080			PC 090		
		105 / 11 i = 3	105 / 14 i = 3	120 / 14 i = 3	120 / 19 i = 3	160 / 19 i = 3	160 / 24 i = 3	160 / 28 i = 3	160 / 19 i = 2,42	160 / 24 i = 2,42	160 / 28 i = 2,42
040	25										
	30										
	40										
	50										
	60										
	80										
100											
050	25										
	30										
	40										
	50										
	60										
	80										
100											
063	25										
	30										
	40										
	50										
	60										
	80										
100											
075	25										
	30										
	40										
	50										
	60										
	80										
100											
090	25										
	30										
	40										
	50										
	60										
	80										
100											
105	25										
	30										
	40										
	50										
	60										
	80										
100											
110	25										
	30										
	40										
	50										
	60										
	80										
100											
130	25										
	30										
	40										
	50										
	60										
	80										
100											




	P1	P	(P)
PC 063	63B5 - 140 / 11	105 / 11	(105 / 14)
PC 071	71B5 - 160 / 14	120 / 14	(120 / 19)
PC 080	80B5 - 200 / 19	160 / 19	(160 / 24) (160 / 28)
PC 090	90B5 - 200 / 24	160 / 24	(160 / 19) (160 / 28)

(..) Only on request
(..) 非标产品





Versions 组合样式浏览





NMRV 025-150

NMRV 025-150 F





NRV 030-150

NRV 030-150 F



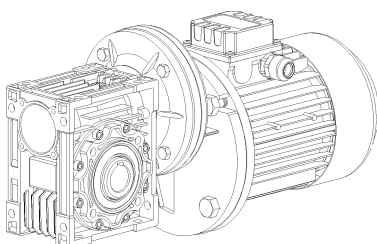

NMRV-NMRV...

NMRV-NMRV...F



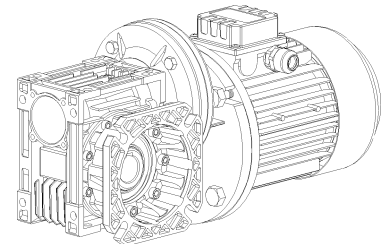
NRV-NMRV...


NRV-NMRV...F



PC-NMRV...

PC-NMRV...F





Efficiency - Dynamic irreversibility - Static irreversibility

EFFICIENCY

Efficiency is a parameter which has a major influence on the sizing of certain applications, and basically depends on gear pair design elements.

The mesh data table on page 234 shows dynamic efficiency ($n_1=1400$) and static efficiency values. Remember that these values are only achieved after the unit has been run in.

DYNAMIC IRREVERSIBILITY

Dynamic irreversibility is achieved when the output shaft stops instantly when drive is no longer transmitted through the worm shaft. This condition requires a dynamic efficiency of $\eta_d < 0.5$ (see table on page 234).

STATIC IRREVERSIBILITY

Static irreversibility is achieved when, with the gear reducer at a standstill, the application of a load to the output shaft does not set in motion the worm shaft. This condition requires a static efficiency of $\eta_s < 0.5$ (see table on page 234).

效率 - 动态逆止(自锁) - 静态逆止

效率

效率是主要决定选型的考虑因素，基本依据齿轮设计的参数来定。

在第234页上的啮合参数记载了动态及静态效率($n_1=1400$)。


注意：这些值只针对在磨期渡过后的减速箱。

动态逆止(自锁)

当马达端的输入轴突然停止时、输出轴是否能同步停止,才体现出动态逆止的效率。此功能要求动态效率 <0.5 (参见第234页图表)

静态逆止(自锁)

当减速箱在停止状态,输出轴上的负载是否能把蜗杆推动,才体现出静态逆止的效率。此功能要求静态效率 <0.5 (参见第234页图表)



η_d		动态自锁效率	
> 0.6		不能自锁	
$0.5 \div 0.6$		自锁不佳	
$0.4 \div 0.5$		自锁良好	
< 0.4		完全自锁	

η_s		静态自锁效率	
> 0.55		不能自锁	
$0.5 \div 0.55$		自锁不佳	
< 0.5		完全自锁	

The table shows approximate irreversibility classes.


Vibrations and shocks can affect a gear reducer's irreversibility.

For the irreversibility conditions of a combined geared unit one must consider that the efficiency of the group is given by the product of the efficiencies of each single reducer, i.e.: $\eta_{tot} = \eta_1 \times \eta_2$

上述图表只是显示逆止功能(自锁功能)的大概分类


振动和冲击会影响减速机的逆止功能的数值。

在考虑逆止(自锁)效率时，两台或以上齿轮箱的组合必须首先考虑单台减速箱的逆止效率是否适合。



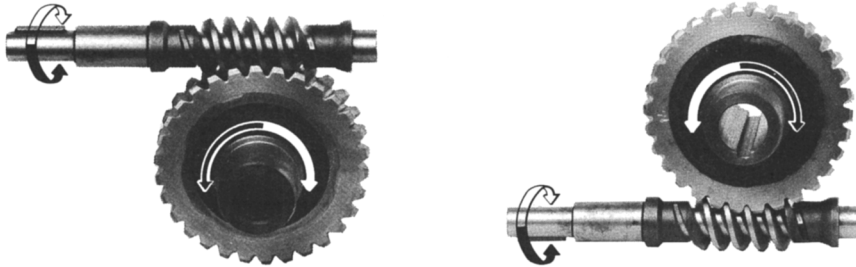
Mesh data 啮合参数

NRV	i	5	7,5	10	15	20	25	30	40	50	60	80	100
025	Z1	6	4	3	2	2		1	1	1	1		
	γ	35°02'	25°03'	19°19'	13°09'	10°41'		6°40'	5°23'	4°31'	3°53'		
	Mx	1,3	1,3	1,3	1,3	0,995		1,3	0,995	0,8	0,67		
	$\eta_d(1400)$	0,87	0,85	0,83	0,79	0,75		0,67	0,62	0,58	0,55		
	η_s	0,72	0,71	0,68	0,61	0,56		0,46	0,41	0,36	0,34		
030	Z1	6	4	3	2	2	1	1	1	1	1	1	1
	γ	27°04'	18°49'	14°20'	9°40'	7°42'	5°35'	4°52'	3°52'	3°12'	2°45'	2°07'	
	Mx	1,44	1,44	1,44	1,44	1,09	1,7	1,44	1,09	0,89	0,74	0,56	
	$\eta_d(1400)$	0,87	0,85	0,82	0,77	0,73	0,68	0,65	0,59	0,55	0,51	0,44	
	η_s	0,72	0,67	0,63	0,55	0,5	0,43	0,39	0,35	0,31	0,27	0,23	
040	Z1	6	4	3	2	2	2	1	1	1	1	1	1
	γ	34°19'	24°28'	18°51'	12°49'	10°23'	8°43'	6°29'	5°14'	4°23'	3°47'	2°57'	2°25'
	Mx	2,06	2,06	2,06	2,06	1,57	1,27	2,06	1,57	1,27	1,06	0,81	0,65
	$\eta_d(1400)$	0,89	0,87	0,85	0,82	0,78	0,75	0,7	0,65	0,62	0,58	0,52	0,47
	η_s	0,74	0,71	0,67	0,6	0,55	0,51	0,45	0,4	0,36	0,32	0,28	0,24
050	Z1	6	4	3	2	2	2	1	1	1	1	1	1
	γ	33°37'	23°54'	18°23'	12°30'	10°06'	8°29'	6°19'	5°06'	4°16'	3°40'	2°52'	2°21'
	Mx	2,56	2,56	2,56	2,56	1,95	1,58	2,56	1,95	1,58	1,32	1	0,8
	$\eta_d(1400)$	0,89	0,88	0,86	0,82	0,79	0,76	0,72	0,67	0,63	0,59	0,53	0,49
	η_s	0,74	0,7	0,66	0,59	0,55	0,51	0,44	0,39	0,35	0,32	0,27	0,23
063	Z1		4	3	2	2	2	1	1	1	1	1	1
	γ		24°31'	18°53'	12°51'	10°25'	8°45'	6°30'	5°15'	4°24'	3°47'	2°58'	2°26'
	Mx		3,25	3,25	3,25	2,48	2	3,25	2,48	2	1,68	1,27	1,02
	$\eta_d(1400)$		0,88	0,87	0,83	0,81	0,78	0,74	0,7	0,66	0,62	0,57	0,51
	η_s		0,71	0,67	0,6	0,55	0,51	0,45	0,4	0,36	0,33	0,28	0,24
075	Z1		4	3	2	2	2	1	1	1	1	1	1
	γ		26°17'	20°20'	13°52'	11°18'	9°32'	7°02'	5°42'	4°48'	4°08'	3°14'	2°40'
	Mx		3,94	3,94	3,94	3	2,42	3,94	3	2,42	2,03	1,54	1,24
	$\eta_d(1400)$		0,89	0,88	0,85	0,82	0,80	0,76	0,72	0,69	0,65	0,60	0,55
	η_s		0,71	0,68	0,61	0,57	0,53	0,46	0,42	0,38	0,35	0,29	0,26
090	Z1		4	3	2	2	2	1	1	1	1	1	1
	γ		29°11'	22°44'	15°36'	12°50'	10°54'	7°57'	6°30'	5°30'	4°46'	3°45'	3°06'
	Mx		4,84	4,84	4,84	3,69	2,98	4,84	3,69	2,98	2,5	1,89	1,52
	$\eta_d(1400)$		0,9	0,89	0,86	0,84	0,82	0,78	0,75	0,72	0,69	0,63	0,59
	η_s		0,73	0,7	0,64	0,6	0,56	0,49	0,45	0,41	0,38	0,32	0,28
105	Z1		4	3	2	2	2	1	1	1	1	1	1
	γ		28°15'	21°57'	15°02'	14°41'	12°34'	7°39'	7°28'	6°22'	5°32'	4°24'	3°39'
	Mx		5,875	5,875	5,875	4,62	3,73	5,875	4,62	3,73	3,13	2,37	1,91
	$\eta_d(1400)$		0,9	0,89	0,86	0,85	0,84	0,79	0,78	0,75	0,72	0,67	0,63
	η_s		0,72	0,69	0,63	0,62	0,59	0,48	0,48	0,44	0,41	0,36	0,32
110	Z1		4	3	2	2	2	1	1	1	1	1	1
	γ		28°15'	21°57'	15°02'	14°41'	12°34'	7°39'	7°28'	6°22'	5°32'	4°24'	3°39'
	Mx		5,875	5,875	5,875	4,62	3,73	5,875	4,62	3,73	3,13	2,37	1,91
	$\eta_d(1400)$		0,9	0,89	0,86	0,85	0,84	0,79	0,78	0,75	0,72	0,67	0,63
	η_s		0,72	0,69	0,63	0,62	0,59	0,48	0,48	0,44	0,41	0,36	0,32
130	Z1		4	3	2	2	2	1	1	1	1	1	1
	γ		28°41'	22°19'	15°18'	13°52'	11°49'	7°47'	7°02'	5°58'	5°11'	4°07'	3°24'
	Mx		6,97	6,97	6,97	5,4	4,37	6,97	5,4	4,37	3,67	2,77	2,23
	$\eta_d(1400)$		0,91	0,89	0,87	0,86	0,84	0,8	0,78	0,75	0,72	0,68	0,64
	η_s		0,72	0,69	0,63	0,61	0,58	0,49	0,46	0,43	0,39	0,34	0,3
150	Z1		6	4	3	2	2	2	1	1	1	1	1
	γ		32°09'	24°35'	17°27'	12°53'	11°19'	9°50'	6°32'	5°43'	4°57'	3°55'	3°14'
	Mx		5,5	6,155	5,5	6,155	5	4,193	6,155	5	4,193	3,17	2,55
	$\eta_d(1400)$		0,91	0,9	0,88	0,86	0,84	0,83	0,78	0,76	0,73	0,68	0,64
	η_s		0,73	0,71	0,66	0,6	0,57	0,54	0,45	0,42	0,39	0,33	0,29



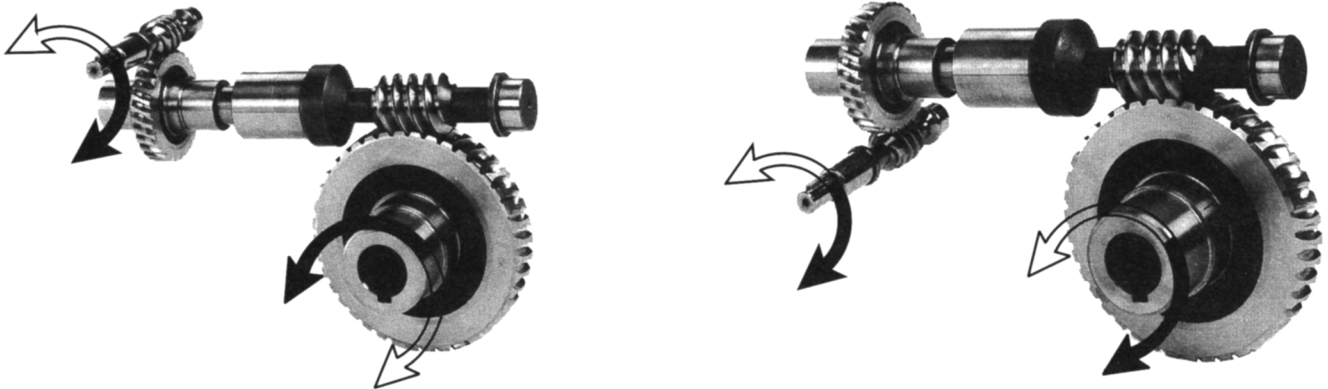
Direction of rotation 旋转方向


NMRV - NRV



The helix is right-handed.
右转式螺旋纹

NMRV+NMRV - NRV+NMRV





Design features (PC)

The PC construction is modular and therefore it can be supplied as a separate unit to be mounted on any type of fitted geared motor (PAM). In this connection, the various possibilities of flange/output shafts can be found on page 230.

Fitting the pre-stage helical module on the main reduction unit is easily done as for any motor of type B14.

The pre-stage unit cannot be used by itself, but only coupled with another reduction unit.

Materials

Case in aluminium alloy.

Gears in case hardened, hardened, tempered steel 20MnCr5 (UNI7846) accurately ground on the involute.


PC 的设计特点 (PC)

PC 结构是一种标准组件(模块)的产品,因此它可与任何型号的齿轮电机组合,组合使用时,各种不同的法兰/输出轴可以参见第230页。前置减速装置主要适合于安装方式为B14的所有马达。该装置不能单独使用,只能与减速机配套使用。

材料

铝合金外壳

钢制 齿轮 20MnCr5 (UNI7846), 正确的环绕。



Coupling to electric motor

Correctly fitting the pinion on the electric motor shaft requires you keep to the following instructions:

- Thoroughly clean the electric motor shaft.
- Remove the motor key from its seat.
- Fit the bush (1) to the drive shaft as shown in the diagram. To make this easier, you can heat the bush to approximately 70/80°C.
- Fit the new key (3) provided in place of the one removed beforehand.

- Fit the pinion (4) taking the same precautions as described in point (c).
 - Fit the washer (5) and tighten with the screw (6).
 - Remove the rubber cap mounted on the seat of the oil seal, taking care since the pre-stage unit is already complete with lubricant.
 - Fit the oil seal (2) and then the motor assembly, taking care not to damage the lip of the oil seal.
- N.B. For correct operation, with no vibration or noise, it is recommended to use good quality motors.

与电机连接

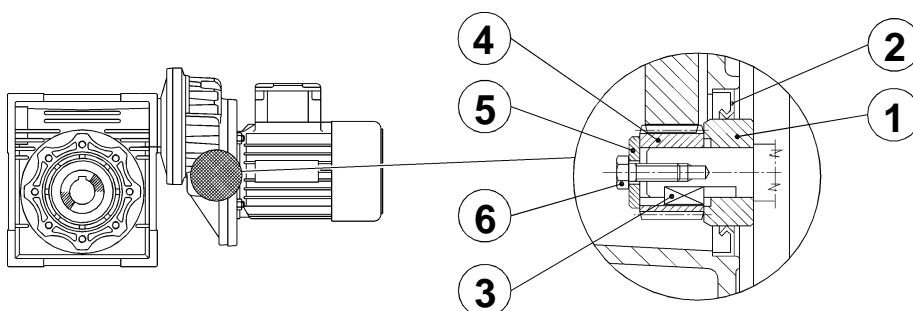
当在电机的轴上安装小齿轮时, 需要注意下列几点:


- 彻底清洁好马达的轴.
- 拿走轴上的键
- 放进轴套(1) 如下面的图所示, 为了更容易安装, 可以把轴套加热至大约 70/80 摄氏度.
- 再放进新的键.
- 把小齿轮 (4) 套进去, 参照c)的方法.

- 放上垫片(5) 收紧螺栓 (6)
- 拿走油封上的橡皮盖, 这一步骤需要小心因为PC已经注入了润滑油了.







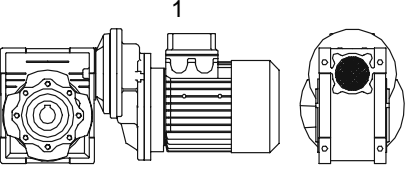

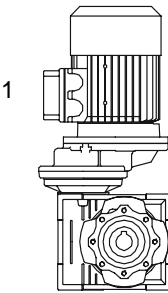
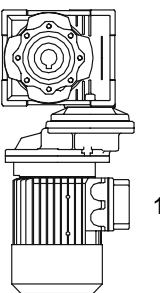
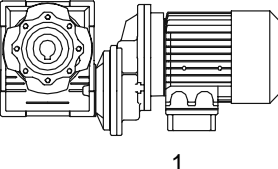

- 装上油封(2) 和其余的马达部件, 小心不要弄坏油封.

注意: 要达到低噪音和小振动的运行效果, 建议使用质量较好的马达.





Mounting positions 安装方式


NMRV - NRV			
NMRV...U - B3	B6	V5	V6
			
			
PC - NMRV			
NMRV...U - B3	B6	V5	V6
			
			

"U" version is related to sizes from 025 to 075. For these sizes it is not necessary to specify mounting position.









- For vertical positions, check with pages 10-11.
- Unless specified otherwise, the standard positions are B3.
- For positions not envisaged, it is necessary to call our Technical Service.

"U" 安装方式只适用于025至075的型号, 在这范围内不用注明安装位置(方向)的.

- 如要垂直安装, 请参考第10-11页.
- 除非特别注明, 所有标准位置是按照 B 的形式.
- 如需要特别的安装位置, 下单时必须说明要求.

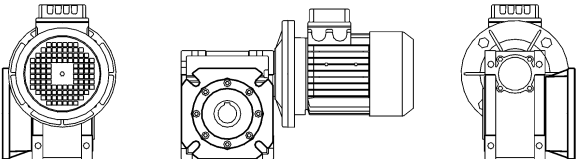
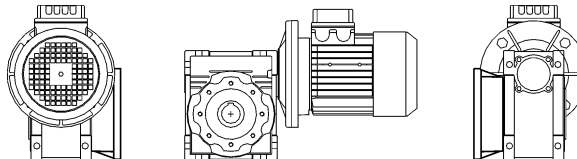


Execution 操作位置

NMRV-NMRV / NRV-NMRV			
AS1	AS2	VS1	VS2
			
PS1	PS2	BS1	BS2
			

- The position of the 1st reducer with respect to the 2nd gear reducer depend on the version. Unless otherwise specified at the time of order, combination groups are supplied in version BS2. The specified mounting position refers to the 2nd gear reducer. See page 238 for the possible mounting positions.
- 在第一级减速箱和第二级减速箱的位置方向配合上,并不是所有型号都可以满足要求的,一般来说标准的匹配位置是按照上图 BS2 供应的. 请参考在 238 页的其它安装方向的选择.

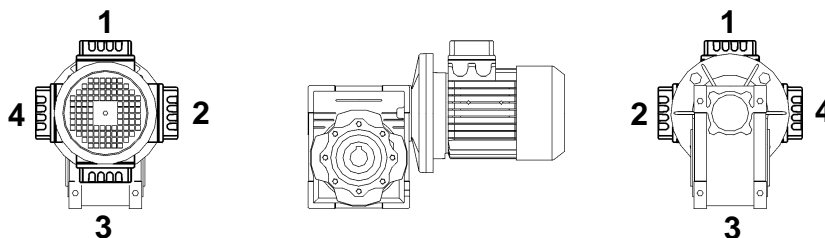
Flange F-FL 法兰


D	S
	

- Unless specified otherwise, the reduction unit is supplied with the flange in pos. D referred to position B3.
- 如没有特别要求,标准的法兰位置是如图 D 一样,根据 B3 的标准安装方式.



Pos. of terminal box 接线箱位置


- In the case of specific requirements, when ordering, specify the position of the terminal box as shown in the diagram.
- 如对接线箱位置有特别要求,请在下单时说明.








NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.06	280.0	1.8	6.2	5	NMRV025	56A4	439	280
	186.7	2.6	4.2	7.5			503	
	140.0	3.4	3.5	10			553	
	93.3	4.9	2.5	15			633	
	70.0	6.1	2.0	20			697	
	46.7	8.2	1.6	30			798	
	35.0	10	1.3	40			878	
	28.0	12	0.9	50			946	
23.3	14	0.7	60	1006				
180.0	2.7	4.8	4.8	5	NMRV025	56B6	509	280
120.0	4.0	3.2	7.5	583				
90.0	5.2	2.7	10	641				
60.0	7.4	1.9	15	734				
45.0	9.3	1.4	20	808				
30.0	12	1.2	30	925				
22.5	15	0.9	40	1018				
18.0	18	0.7	50	1096				
280.0	1.8	10.1	10.1	5	NMRV030	56A4	597	281
186.7	2.6	6.9	7.5	683				
140.0	3.4	5.4	10	752				
93.3	4.7	3.8	15	861				
70.0	6.0	3.0	20	948				
56.0	7.0	3.0	25	1021				
46.7	8.0	2.5	30	1085				
35.0	9.7	1.9	40	1194				
28.0	11	1.5	50	1286				
23.3	13	1.3	60	1367				
17.5	14	0.9	80	1504				
15.0	18	0.9	60	NMRV030	56B6	1583	281	
14.0	25	1.3	100	NMRV025/030	56A4	1620	296	
9.3	32	0.9	150			1830		
7.0	41	0.7	200			1830		
5.6	44	0.8	250			1830		
18.0	18	2.3	50	NMRV040	56B6	2868	282	
15.0	21	1.9	60			3047		
11.3	24	1.4	80			3354		
9.0	27	1.2	100			3490		
4.7	59	1.2	300	NMRV025/040	56A4	3490	296	
3.5	71	0.9	400			3490		
2.8	82	0.7	500			3490		
2.3	101	0.6	600			3490		
1.9	116	0.5	750			3490		
1.6	143	0.5	900			3490		
1.2	171	0.4	1200			3490		
0.9	197	0.3	1500			3490		
0.8	217	0.3	1800			3490		
0.6	268	0.2	2400			3490		
0.5	324	0.2	3000			3490		
0.4	294	0.1	4000			3490		
0.3	356	0.1	5000	3490				
4.7	57	1.3	300	NMRV030/040	56A4	3490	297	
3.5	70	0.9	400			3490		
2.8	96	0.6	500			3490		
2.3	104	0.7	600			3490		






Performance 性能参数 NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)				
0.06	1.9	121	0.6	750	NMRV030/040	56A4	3490	297			
	1.6	139	0.5	900			3490				
	1.2	166	0.4	1200			3490				
	0.9	196	0.4	1500			3490				
	0.8	218	0.3	1800			3490				
	0.58	261	0.2	2400			3490				
	0.4	300	0.2	3200			3490				
	0.4	279	0.1	4000			3490				
	0.28	338	0.1	5000			3490				
	1.6	141	1.0	900			NMRV030/050		56A4	4840	297
1.2	169	0.7	1200	4840							
0.93	199	0.7	1500	4840							
0.78	222	0.7	1800	4840							
0.6	266	0.5	2400	4840							
0.5	307	0.4	3000	4840							
0.35	288	0.3	4000	4840							
0.29	311	0.3	4800	4840							
0.9	204	1.1	1500	NMRV030/063	56A4	6270		297			
0.78	225	0.9	1800			6270					
0.58	276	0.8	2400			6270					
0.47	319	0.7	3000			6270					
0.35	306	0.6	4000			6270					
0.28	360	0.4	5000			6270					
0.6	330	1.1	2400	NMRV040/075	56A4	7380	298				
0.47	377	0.8	3000			7380					
0.35	355	0.7	4000			7380					
0.28	419	0.5	5000			7380					
0.5	406	1.4	3000	NMRV040/090	56A4	8180	298				
0.35	365	1.3	4000			8180					
0.28	431	1.0	5000			8180					
0.09	560.0	1.4	5.9	5	NMRV025	56A2	349	280			
	373.3	2.0	3.9	7.5			399				
	280.0	2.6	3.4	10			439				
	186.7	3.8	2.4	15			503				
	140.0	4.9	1.9	20			553				
	93.3	6.7	1.3	30			633				
	70.0	8.3	1.1	40			697				
	56.0	10	0.9	50			751				
	280.0	2.7	4.1	5			NMRV025		56B4	439	280
	186.7	3.9	2.8	7.5						503	
140.0	5.1	2.4	10	553							
93.3	7.3	1.6	15	633							
70.0	9.2	1.3	20	697							
46.7	12	1.1	30	798							
35.0	15	0.9	40	878							
560.0	1.4	8.8	5	NMRV030	56A2	474		281			
373.3	2.0	6.5	7.5			542					
280.0	2.6	5.0	10			597					
186.7	3.7	3.5	15			683					
140.0	4.8	2.5	20			752					
112.0	5.7	2.8	25			810					
93.3	6.5	2.3	30			861					
70.0	8.1	1.7	40			948					
56.0	10	1.4	50			1021					





NMRV Performance 性能参数


P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.09	46.7	11	1.1	60	NMRV030	56A2	1085	281
	35.0	13	0.9	80			1194	
	280.0	2.7	6.7	5	NMRV030	56B4	597	281
	186.7	3.9	4.6	7.5			683	
	140.0	5.0	3.6	10			752	
	93.3	7.1	2.5	15			861	
	70.0	9.0	2.0	20			948	
	56.0	10	2.0	25			1021	
	46.7	12	1.7	30			1085	
	35.0	14	1.2	40			1194	
28.0	17	1.0	50	1286				
23.3	19	0.9	60	1367				
180.0	4.1	4.9	5	NMRV030	63A6	692	281	
120.0	5.9	3.4	7.5			792		
90.0	7.6	2.6	10			871		
60.0	11	1.9	15			997		
45.0	13	1.5	20			1098		
36.0	15	1.5	25			1183		
30.0	17	1.2	30			1257		
22.5	21	1.0	40			1383		
18.0	24	0.7	50			1490		
28.0	20	1.6	100			NMRV025/030		56A2
18.7	25	1.1	150	1472				
14.0	33	0.9	200	1620				
14.0	38	0.8	100	NMRV025/030	56B4	1620	296	
9.3	49	0.6	150			1830		
7.0	62	0.5	200			1830		
5.6	66	0.5	250			1830		
4.7	75	0.4	300			1830		
3.5	107	0.3	400			1830		
2.8	115	0.3	500			1830		
2.3	135	0.2	600			1830		
1.9	151	0.2	750			1830		
1.6	178	0.2	900			1830		
1.2	212	0.1	1200			1830		
0.9	247	0.1	1500			1830		
0.78	304	0.1	1800			1830		
0.58	340	0.1	2400			1830		
0.47	405	0.1	3000			1830		
28.0	19	2.0	50	NMRV040	56B4	2475	282	
23.3	21	1.7	60			2630		
17.5	26	1.3	80			2895		
14.0	29	1.0	100			3118		
30.0	19	2.6	30	NMRV040	63A6	2419	282	
22.5	24	1.9	40			2662		
18.0	27	1.5	50			2868		
15.0	31	1.3	60			3047		
11.3	37	1.0	80			3354		
9.0	41	0.8	100			3490		
12.0	47	1.3	75			PC063+NMRV040		63A6
10.0	51	1.4	90	3488				
7.5	62	1.1	120	3490				





Performance 性能参数


NMRV



P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)				
0.09	6.0	72	0.8	150	PC063+NMRV040	63A6	3490	291			
	5.0	79	0.7	180			3490				
	9.3	45	1.6	300	NMRV025/040	56A2	3490	296			
	7.0	54	1.2	400			3490				
	5.6	77	0.8	500			3490				
	4.7	88	0.8	300	NMRV030/040	56B4	3490	297			
	15.0	32	2.3	60	NMRV050	63A6	4183	283			
	11.3	37	1.8	80			4604				
	9.0	42	1.3	100			4840				
	6.0	73	1.6	150	PC063+NMRV050	63A6	4840	291			
	5.0	81	1.3	180			4840				
	3.8	94	0.9	240			4840				
	3.0	106	0.7	300			4840				
	3.5	107	1.2	400	NMRV030/050	56B4	4840	297			
	2.8	123	1.0	500			4840				
	2.3	159	0.9	600			4840				
	1.9	185	0.8	750			4840				
	1.6	212	0.7	900			4840				
3.8	99	1.7	240	PC063+NMRV063	63A6	6270	292				
3.0	109	1.4	300			6270					
1.6	200	1.0	900	NMRV030/063	56B4	6270	297				
1.2	263	0.9	1200			6270					
0.93	305	0.7	1500			6270					
0.9	360	1.1	1500	NMRV040/075	56B4	7380	298				
0.78	404	1.0	1800			7380					
0.58	496	0.7	2400			7380					
0.5	609	0.9	3000	NMRV040/090	56B4	8180	298				
0.35	548	0.8	4000			8180					
0.12	560.0	1.8	4.4	5	NMRV025	56B2	349	280			
	373.3	2.7	3.0	7.5			399				
	280.0	3.5	2.6	10			439				
	186.7	5.0	1.8	15			503				
	140.0	6.5	1.4	20			553				
	93.3	9.0	1.0	30			633				
	70.0	11	0.8	40			697				
	280.0	3.6	5.1	5			NMRV030		63A4	597	281
	186.7	5.2	3.4	7.5	683						
	140.0	6.7	2.7	10	752						
	93.3	9.5	1.9	15	861						
	70.0	12	1.5	20	948						
	56.0	14	1.5	25	1021						
	46.7	16	1.3	30	1085						
	35.0	19	0.9	40	1194						
	28.0	23	0.8	50	1286						
	180.0	5.4	3.7	5	NMRV030	63B6		692		281	
	120.0	7.9	2.5	7.5				792			
	90.0	10	2.0	10				871			
	60.0	14	1.4	15			997				
	45.0	18	1.1	20			1098				




NMRV Performance 性能参数



P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)				
0.12	36.0	20	1.1	25	NMRV030	63B6	1183	281			
	30.0	23	0.9	30			1257				
	46.7	17	2.6	30	NMRV040	63A4	2087	282			
	35.0	21	1.9	40			2298				
	28.0	25	1.5	50			2475				
	23.3	28	1.3	60			2630				
	17.5	34	1.0	80			2895				
	14.0	38	0.8	100			3118				
	30.0	25	1.9	30	NMRV040	63B6	2419	282			
	22.5	32	1.4	40			2662				
	18.0	36	1.2	50			2868				
	15.0	41	0.9	60			3047				
	18.7	42	1.2	75	PC063+NMRV040	63A4	2833	291			
	15.6	46	1.2	90			3011				
	11.7	57	0.9	120			3314				
	9.3	66	0.7	150			3490				
	7.8	74	0.6	180			3490				
	12.0	62	1.0	75	PC063+NMRV040	63B6	3283	291			
	10.0	68	1.1	90			3488				
	7.5	83	0.8	120			3490				
	23.3	29	2.3	60	NMRV050	63A4	3610	283			
	17.5	35	1.9	80			3973				
	14.0	40	1.4	100			4280				
	22.5	32	2.6	40	NMRV050	63B6	3654	283			
	18.0	38	2.0	50			3936				
	15.0	42	1.7	60			4183				
	11.3	50	1.4	80			4604				
	9.0	56	1.0	100			4840				
	9.3	68	1.3	150			4840				
	7.8	75	1.1	180	PC063+NMRV050	63A4	4840	291			
	5.8	88	0.8	240			4840				
	4.7	98	0.7	300			4840				
	12.0	63	1.7	75			4506				
	10.0	70	2.1	90	PC063+NMRV050	63B6	4788	291			
	7.5	84	1.5	120			4840				
	6.0	97	1.2	150			4840				
	5.0	108	1.0	180			4840				
	3.8	125	0.7	240			4840				
	4.7	119	1.2	300			NMRV030/050		63A4	4840	297
	3.5	142	0.9	400						4840	
	2.8	164	0.7	500	4840						
	5.8	92	1.5	240	PC063+NMRV063	63A4	6270	292			
	4.7	103	1.2	300			6270				




Performance 性能参数								NMRV	
P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)		
0.12	6.0	101	2.1	150	PC063+NMRV063	63B6	6270	292	
	5.0	112	1.8	180			6270		
	3.8	131	1.3	240			6270		
	3.0	145	1.0	300			6270		
	2.8	171	1.3	500	NMRV030/063	63A4	6270	297	
	2.3	208	1.1	600			6270		
	1.9	241	0.9	750			6270		
	1.6	325	1.2	900	NMRV040/075	63A4	7380	298	
	1.2	399	0.9	1200			7380		
	0.8	547	0.9	1800	NMRV040/090	63A4	8180	298	
	0.58	695	0.9	2400			8180		
	0.5	884	1.1	3000	NMRV050/105	63A4	10320	298	
	0.35	784	1.0	4000			10320		
	0.28	928	0.76	5000			10320		
	0.5	884	1.2	3000	NMRV050/110	63A4	10320	299	
	0.35	784	1.0	4000			10320		
0.28	928	0.80	5000	10320					
0.15	180.0	7	3.0	5	NMRV030	63C6	692	281	
	120.0	10	2.0	7.5			792		
	90.0	13	1.6	10			871		
	60.0	18	1.1	15			997		
	45.0	22	0.9	20			1098		
	60.0	19	2.4	15	NMRV040	63C6	1920	282	
	45.0	24	1.8	20			2113		
	36.0	29	1.5	25			2276		
	30.0	32	1.6	30			2419		
	22.5	39	1.1	40			2662		
	18.0	45	0.9	50			2868		
	18.0	47	1.6	50	NMRV050	63C6	3936	283	
	15.0	53	1.4	60			4183		
	11.3	62	1.1	80			4604		
	10.0	87	1.7	90	PC063+NMRV050	63C6	4788	291	
	7.5	105	1.2	120			4840		
	6.0	127	1.7	150	PC063+NMRV063	63C6	6270	292	
	5.0	140	1.4	180			6270		
	0.18	560.0	2.7	4.4	5	NMRV030	63A2	474	281
		373.3	4.0	3.2	7.5			542	
		280.0	5.2	2.5	10			597	
		186.7	7.5	1.7	15			683	
		140.0	10	1.3	20			752	
		112.0	11	1.4	25			810	
93.3		13	1.1	30	861				
70.0		16	0.9	40	948				
280.0		5.3	3.4	5	NMRV030	63B4	597	281	
186.7		7.8	2.3	7.5			683		
140.0		10	1.8	10			752		
93.3		14	1.3	15			861		
70.0		18	1.0	20			948		






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.18	56.0	21	1.0	25	NMRV030	63B4	1021	281
	46.7	24	0.8	30			1085	
	93.3	14	2.4	30	NMRV040	63A2	1657	282
	70.0	18	1.8	40			1824	
	56.0	21	1.4	50			1964	
	70.0	19	2.0	20	NMRV040	63B4	1824	282
	56.0	23	1.7	25			1964	
	46.7	26	1.7	30			2087	
	35.0	32	1.3	40			2298	
	28.0	38	1.0	50			2475	
	23.3	43	0.8	60			2630	
	45.0	29	1.5	20			NMRV040	
	36.0	34	1.3	25	2276			
	30.0	38	1.3	30	2419			
	22.5	47	1.0	40	2662			
	18.7	64	0.8	75	PC063+NMRV040	63B4	2833	291
	15.6	70	0.8	90			3011	
	11.7	85	0.6	120			3314	
46.7	24	2.1	60	NMRV050	63A2	2865	283	
35.0	30	1.5	80			3153		
28.0	34	1.2	100			3397		
35.0	33	2.3	40	NMRV050	63B4	3153	283	
28.0	39	1.9	50			3397		
23.3	43	1.6	60			3610		
17.5	52	1.2	80			3973		
14.0	60	0.9	100			4280		
18.0	56	1.4	50			NMRV050		71A6
15.0	63	1.1	60	4183				
11.3	75	0.9	80	4604				
18.7	64	1.4	75	PC063+NMRV050	63B4	3889	291	
15.6	71	1.5	90			4132		
11.7	87	1.1	120			4548		
9.3	101	0.9	150			4840		
7.8	113	0.7	180			4840		
5.8	133	0.6	240			4840		
12.0	95	1.2	75			PC071+NMRV050		71A6
10.0	105	1.4	90	4788				
7.5	126	1.0	120	4840				






Performance 性能参数 **NMRV**

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
0.18	15.0	66	2.1	60	NMRV063	71A6	5467	284
	11.3	79	1.6	80			6018	
	9.0	90	1.4	100			6270	
	9.3	103	1.7	150	PC063+NMRV063	63B4	6270	292
	7.8	117	1.4	180			6270	
	5.8	139	1.0	240			6270	
	4.7	155	0.8	300			6270	
	12.0	97	2.2	75	PC071+NMRV063	71A6	5889	292
	10.0	107	2.4	90			6259	
	7.5	131	1.8	120			6270	
	6.0	152	1.4	150			6270	
	5.0	168	1.2	180			6270	
	3.8	197	0.9	240			6270	
	3.0	218	0.7	300			6270	
	3.5	222	1.0	400	NMRV030/063	63B4	6270	297
2.8	257	0.8	500	6270				
5.0	179	1.7	180	PC071+NMRV075	71A6	7380	293	
3.8	211	1.2	240			7380		
3.0	235	1.0	300			7380		
2.3	362	1.1	600	NMRV040/075	63B4	7380	298	
1.9	435	0.9	750			7380		
1.6	487	0.8	900			7380		
1.2	629	1.0	1200	NMRV040/090	63B4	8180	298	
0.93	735	0.8	1500			8180		
0.8	861	1.3	1800	NMRV050/105	63B4	10320	298	
0.58	1113	0.9	2400			10320		
0.8	861	1.5	1800	NMRV050/110	63B4	10320	299	
0.58	1113	1.1	2400			10320		
0.22	280.0	7	2.8	5	NMRV030	63C4	597	281
	186.7	10	1.9	7.5			683	
	140.0	12	1.5	10			752	
	93.3	17	1.0	15			861	
	70.0	22	0.8	20			948	
	93.3	18	2.2	15	NMRV040	63C4	1657	282
	70.0	23	1.7	20			1824	
	56.0	28	1.4	25			1964	
	46.7	32	1.4	30			2087	
	35.0	39	1.1	40			2298	
	28.0	47	0.8	50			2475	
	28.0	47	1.5	50	NMRV050	63C4	3397	283
	23.3	53	1.3	60			3610	
	17.5	64	1.0	80			3973	
	18.7	78	1.2	75	PC063+NMRV050	63C4	3889	291
	15.6	86	1.2	90			4132	
	11.7	106	0.9	120			4548	





NMRV Performance 性能参数


P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)				
0.22	9.3	126	1.4	150	PC063+NMRV063	63C4	6270	292			
	7.8	143	1.1	180			6270				
	4.7	210	1.1	300	NMRV030/063	63C4	6270	297			
	3.5	271	0.8	400			6270				
0.25	560.0	3.8	3.2	5	NMRV030	63B2	474	281			
	373.3	5.6	2.3	7.5			542				
	280.0	7.2	1.8	10			597				
	186.7	10	1.3	15			683				
	140.0	13	0.9	20			752				
	112.0	16	1.0	25			810				
	93.3	18	0.8	30			861				
	280.0	8	4.5	5			NMRV040		71A4	1149	282
	186.7	11	3.6	7.5						1315	
	140.0	14	2.8	10						1447	
93.3	21	1.9	15	1657							
70.0	27	1.5	20	1824							
56.0	32	1.2	25	1964							
46.7	36	1.3	30	2087							
35.0	44	0.9	40	2298							
180.0	12	3.5	5	NMRV040	71B6	1331	282				
120.0	17	2.6	7.5			1524					
90.0	22	2.0	10			1677					
60.0	31	1.4	15			1920					
45.0	40	1.1	20			2113					
36.0	48	0.9	25			2276					
30.0	53	0.9	30			2419					
35.0	42	1.1	80	NMRV050	63B2	3153	283				
28.0	48	0.8	100			3397					
70.0	27	2.7	20	NMRV050	71A4	2503	283				
56.0	32	2.2	25			2696					
46.7	37	2.3	30			2865					
35.0	46	1.7	40			3153					
28.0	54	1.4	50			3397					
23.3	60	1.1	60			3610					
17.5	72	0.9	80			3973					
45.0	40	1.9	20			NMRV050		71B6	2900	283	
36.0	48	1.5	25	3124							
30.0	54	1.7	30	3320							
22.5	67	1.2	40	3654							
18.0	78	1.0	50	3936							
15.0	88	0.8	60	4183							





Performance 性能参数


NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.25	18.7	88	1.0	75	PC071+NMRV050	71A4	3889	292
	15.6	98	1.1	90			4132	
	11.7	121	0.8	120			4548	
	28.0	56	2.4	50	NMRV063	71A4	4440	284
	23.3	63	2.0	60			4719	
	17.5	78	1.6	80			5193	
	14.0	87	1.4	100			5595	
	18.0	81	1.8	50	NMRV063	71B6	5145	284
	15.0	92	1.5	60			5467	
	11.3	110	1.2	80			6018	
	9.0	125	1.0	100			6270	
	18.7	91	1.8	75	PC071+NMRV063	71A4	5083	292
	15.6	100	2.0	90			5401	
	11.7	125	1.5	120			5945	
	9.3	143	1.2	150			6270	
	7.8	163	1.0	180			6270	
	5.8	192	0.7	240			6270	
	4.7	215	0.6	300			6270	
	12.0	135	1.6	75			PC071+NMRV063	
	10.0	148	1.8	90	6259			
	7.5	181	1.3	120	6270			
	6.0	211	1.0	150	6270			
	7.0	159	1.4	400	NMRV030/063	63B2	6270	297
	5.6	185	1.2	500			6270	
	17.5	82	2.3	80	NMRV075	71A4	6130	285
	14.0	94	1.9	100			6603	
	11.3	117	1.7	80	NMRV075	71B6	7103	285
	9.0	133	1.4	100			7380	
	9.3	151	1.7	150	PC071+NMRV075	71A4	7380	293
	7.8	172	1.4	180			7380	
	5.8	201	1.1	240			7380	
	4.7	230	0.9	300			7380	
	12.0	139	2.4	75	PC071+NMRV075	71B6	6952	293
	10.0	155	2.5	90			7380	
	7.5	191	1.9	120			7380	
	6.0	219	1.5	150			7380	
	5.0	248	1.2	180			7380	
	3.5	336	1.1	400			NMRV040/075	
	2.8	384	0.8	500	7380			
	5.0	263	1.9	180	PC071+NMRV090	71B6	8180	293
	3.8	318	1.4	240			8180	
	3.0	358	1.1	300			8180	
	2.3	512	1.2	600	NMRV040/090	71A4	8180	298
	1.9	598	0.9	750			8180	
	1.6	667	0.8	900			8180	
	1.2	943	1.1	1200	NMRV050/105	71A4	10320	298
	0.93	1064	1.0	1500			10320	
	0.78	1195	0.9	1800			10320	






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)				
0.25	1.2	943	1.3	1200	NMRV050/110	71A4	10320	299			
	0.93	1064	1.2	1500			10320				
	0.78	1195	1.1	1800			10320				
	0.6	1624	1.0	2400	NMRV063/130	71A4	13500	299			
		1935	0.8	3000			13500				
		2046	0.6	4000			13500				
		2430	0.5	5000			13500				
		1199	1.8	1800			NMRV063/150		71A4	18000	299
		1446	1.8	2400						18000	
	1713	1.4	3000	18000							
	2026	0.9	4000	18000							
	2251	0.7	5000	18000							
0.37	560.0	5.6	2.1	5	NMRV030	63C2	474	281			
	373.3	8.2	1.6	7.5			542				
	280.0	11	1.2	10			597				
	186.7	15	0.8	15			683				
	560.0	5.7	4.2	5	NMRV040	71A2	912	282			
	373.3	8.4	3.3	7.5			1044				
	280.0	11	2.6	10			1149				
	186.7	16	1.9	15			1315				
	140.0	21	1.4	20			1447				
	112.0	25	1.1	25			1559				
	280.0	11	3.0	5	NMRV040	71B4	1149	282			
	186.7	16	2.4	7.5			1315				
	140.0	21	1.9	10			1447				
	93.3	31	1.3	15			1657				
	70.0	39	1.0	20			1824				
	56.0	47	0.8	25			1964				
	46.7	53	0.8	30			2087				
	112.0	25	2.0	25			NMRV050		71A2	2140	283
	93.3	29	2.2	30	2274						
	70.0	37	1.6	40	2503						
	56.0	44	1.2	50	2696						
	46.7	50	1.0	60	2865						
	35.0	62	0.7	80	3153						
	140.0	22	3.3	10	NMRV050	71B4		1987		283	
93.3	31	2.4	15	2274							
70.0	40	1.8	20	2503							
56.0	48	1.5	25	2696							
46.7	55	1.5	30	2865							
35.0	68	1.1	40	3153							






Performance 性能参数 **NMRV**

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
0.37	28.0	80	0.9	50	NMRV050	71B4	3397	283
	23.3	89	0.8	60			3610	
	180.0	17	4.3	5	NMRV050	80A6	1827	283
	120.0	25	3.3	7.5			2091	
	90.0	33	2.5	10			2302	
	60.0	47	1.8	15			2635	
	45.0	60	1.3	20			2900	
	36.0	72	1.0	25			3124	
	30.0	80	1.1	30			3320	
	35.0	71	2.1	40	NMRV063	71B4	4122	284
	28.0	83	1.6	50			4440	
	23.3	94	1.4	60			4719	
	17.5	115	1.1	80			5193	
	14.0	129	0.9	100			5595	
	45.0	60	2.4	20	NMRV063	80A6	3791	284
	36.0	74	1.9	25			4084	
	30.0	82	2.1	30			4339	
	22.5	102	1.6	40			4776	
	18.0	120	1.2	50			5145	
15.0	137	1.0	60	5467				
18.7	134	1.2	75	PC071+NMRV063	71B4	5083	292	
15.6	148	1.4	90			5401		
11.7	185	1.0	120			5945		
9.3	212	0.8	150			6270		
9.3	181	1.3	300	NMRV030/063	71A2	6270	297	
7.0	236	1.0	400			6270		
23.3	98	2.0	60	NMRV075	71B4	5569	285	
17.5	121	1.6	80			6130		
14.0	139	1.3	100			6603		
18.0	126	1.8	50	NMRV075	80A6	6073	285	
15.0	144	1.5	60			6453		
11.3	173	1.2	80			7103		
9.0	196	1.0	100			7380		
18.7	138	1.8	75	PC071+NMRV075	71B4	6000	293	
15.6	154	1.9	90			6375		
11.7	191	1.5	120			7017		
9.3	223	1.1	150			7380		
7.8	254	0.9	180			7380		
12.0	206	1.6	75	PC080+NMRV075	80A6	6952	293	
10.0	230	1.7	90			7380		
7.5	283	1.3	120			7380		
6.0	324	1.0	150			7380		
4.7	405	1.0	300	NMRV040/075	71B4	7380	298	
3.5	498	0.7	400			7380		
11.3	185	1.7	80	NMRV090	80A6	7859	286	
9.0	212	1.3	100			8180		






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
0.37	7.8	268	1.5	180	PC071+NMRV090	71B4	8180	293
	5.8	321	1.1	240			8180	
	4.7	371	0.9	300			8180	
	6.0	347	1.6	150	PC080+NMRV090	80A6	8180	294
	5.0	389	1.3	180			8180	
	3.8	471	1.0	240			8180	
	4.7	402	1.5	300	NMRV040/090	71B4	8180	298
	3.5	523	1.2	400			8180	
	2.8	611	0.9	500			8180	
	2.3	757	0.8	600			8180	
	3.8	509	1.5	240	PC080+NMRV105	80A6	10320	294
	3.0	577	1.2	300			10320	
1.9	950	1.2	750	NMRV050/105	71B4	10320	298	
1.6	1079	1.0	900			10320		
1.2	1396	0.7	1200			10320		
3.8	509	1.6	240	PC080+NMRV110	80A6	10320	294	
3.0	577	1.3	300			10320		
1.9	950	1.3	750	NMRV050/110	71B4	10320	299	
1.6	1079	1.2	900			10320		
1.2	1396	0.8	1200			10320		
0.9	1674	1.1	1500	NMRV063/130	71B4	13500	299	
0.78	1887	0.9	1800			13500		
0.8	1775	1.2	1800	NMRV063/150	71B4	18000	299	
0.6	2141	1.2	2400			18000		
0.5	2535	0.9	3000			18000		
0.55	560.0	8.4	2.8	5	NMRV040	71B2	912	282
	373.3	13	2.2	7.5			1044	
	280.0	17	1.8	10			1149	
	186.7	24	1.3	15			1315	
	140.0	31	0.9	20			1447	
	112.0	37	0.8	25			1559	
	280.0	17	2.0	5	NMRV040	71C4	1149	282
	186.7	24	1.6	7.5			1315	
	140.0	32	1.3	10			1447	
	93.3	46	0.9	15			1657	
	140.0	31	1.7	20	NMRV050	71B2	1987	283
	112.0	38	1.4	25			2140	
	93.3	43	1.5	30			2274	
	70.0	55	1.1	40			2503	
	56.0	65	0.8	50			2696	
	46.7	74	0.7	60			2865	
	280.0	17	3.7	5	NMRV050	80A4	1577	283
	186.7	25	2.9	7.5			1805	






Performance 性能参数 NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
0.55	140.0	32	2.2	10	NMRV050	80A4	1987	283
	93.3	46	1.6	15			2274	
	70.0	59	1.2	20			2503	
	56.0	71	1.0	25			2696	
	46.7	81	1.0	30			2865	
	120.0	38	2.2	8	NMRV050	80B6	2091	283
	90.0	49	1.7	10			2302	
	60.0	69	1.2	15			2635	
	45.0	89	0.9	20			2900	
	70.0	56	1.9	40	NMRV063	71B2	3272	284
	56.0	67	1.5	50			3524	
	46.7	77	1.2	60			3745	
	35.0	95	0.9	80			4122	
	28.0	109	0.7	100			4440	
	70.0	61	2.2	20	NMRV063	80A4	3272	284
	56.0	73	1.8	25			3524	
	46.7	83	1.9	30			3745	
	35.0	105	1.4	40			4122	
	28.0	124	1.1	50			4440	
	23.3	140	0.9	60			4719	
	60.0	71	2.2	15	NMRV063	80B6	3444	284
	45.0	90	1.6	20			3791	
	36.0	109	1.3	25			4084	
	30.0	123	1.4	30			4339	
	22.5	152	1.1	40			4776	
	18.7	200	0.8	75	PC071+NMRV063	71C4	5083	292
	15.6	219	0.9	90			5401	
	35.0	99	1.3	80	NMRV075	71B2	4865	285
	28.0	114	1.0	100			5241	
	35.0	108	2.0	40	NMRV075	80A4	4865	285
	28.0	129	1.6	50			5241	
	23.3	146	1.4	60			5569	
	17.5	180	1.1	80			6130	
	14.0	206	0.9	100			6603	
	30.0	128	2.0	30	NMRV075	80B6	5122	285
	22.5	159	1.5	40			5637	
	18.0	187	1.2	50			6073	
	15.0	214	1.0	60			6453	
	18.7	205	1.2	75	PC071+NMRV075	71C4	6000	293
	15.6	230	1.3	90			6375	
	11.7	284	1.0	120			7017	
	18.7	205	1.2	75	PC080+NMRV075	80A4	6000	293
	15.6	230	1.3	90			6375	
	11.7	284	1.0	120			7017	
	9.3	332	0.8	150			7380	






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.55	12.0	306	1.1	75	PC080+NMRV075	80B6	6952	293
	10.0	341	1.1	90			7380	
	17.5	189	1.5	80	NMRV090	80A4	6783	286
	14.0	221	1.2	100			7306	
	18.0	198	2.0	50	NMRV090	80B6	6719	286
	15.0	224	1.6	60			7140	
	11.3	275	1.1	80			7859	
	9.0	315	0.9	100			8180	
	15.6	240	2.3	90	PC080+NMRV090	80A4	7054	294
	11.7	297	1.6	120			7764	
	9.3	355	1.3	150			8180	
	7.8	398	1.0	180			8180	
10.0	357	2.0	90	PC080+NMRV090	80B6	8174	294	
7.5	441	1.4	120			8180		
6.0	516	1.1	150			8180		
5.0	578	0.9	180			8180		
9.3	306	2.0	300	NMRV040/090	71B2	8180	298	
7.0	403	1.5	400			8180		
5.6	470	1.2	500			8180		
17.5	201	2.4	80	NMRV105	80A4	8571	287	
14.0	236	1.9	100			9232		
11.3	294	1.8	80	NMRV105	80B6	9931	287	
9.0	338	1.4	100			10320		
7.8	425	1.7	180	PC080+NMRV105	80A4	10320	294	
5.8	513	1.2	240			10320		
4.7	597	1.0	300			10320		
7.5	462	2.2	120	PC080+NMRV105	80B6	10320	294	
6.0	552	1.8	150			10320		
5.0	620	1.5	180			10320		
3.8	756	1.0	240			10320		
4.7	639	1.7	300	NMRV050/105	80A4	10320	298	
3.5	826	1.2	400			10320		
2.8	984	1.0	500			10320		
2.3	1181	0.9	600			10320		
1.9	1411	0.8	750			10320		
17.5	201	2.6	80	NMRV110	80A4	8571	288	
14.0	236	2.0	100			9232		
11.3	294	1.9	80	NMRV110	80B6	9931	288	
9.0	338	1.5	100			10320		
7.8	425	1.8	180	PC080+NMRV110	80A4	10320	294	
5.8	513	1.3	240			10320		
4.7	597	1.0	300			10320		
7.5	462	2.6	120	PC080+NMRV110	80B6	10320	294	
6.0	552	2.0	150			10320		
5.0	620	1.6	180			10320		
3.8	756	1.1	240			10320		






Performance 性能参数 NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)		
0.55	4.7	639	2.0	300	NMRV050/110	80A4	10320	299	
	3.5	826	1.4	400			10320		
	2.8	984	1.1	500			10320		
	2.3	1181	1.0	600			10320		
	1.9	1411	0.9	750			10320		
	3.8	756	1.6	240	PC080+NMRV130	80B6	13500	295	
	3.0	858	1.3	300			13500		
	2.8	996	1.6	500	NMRV063/130	80A4	13500	299	
	1.9	1471	1.2	750			13500		
	1.2	2132	0.8	1200			13500		
	0.8	2638	0.8	1800	NMRV063/150	80A4	18000	299	
	0.6	3182	0.8	2400			18000		
	0.75	560.0	12	2.1	5	NMRV040	80A2	912	282
		373.3	17	1.6	7.5			1044	
		280.0	23	1.3	10			1149	
186.7		32	1.0	15	1315				
560.0		12	3.9	5	NMRV050	80A2	1251	283	
373.3		17	3.0	7.5			1433		
280.0		23	2.4	10			1577		
186.7		33	1.7	15			1805		
140.0		42	1.3	20			1987		
112.0		51	1.0	25			2140		
93.3		58	1.1	30			2274		
280.0		23	2.7	5			NMRV050		80B4
186.7		34	2.1	7.5	1805				
140.0		44	1.6	10	1987				
93.3		63	1.2	15	2274				
70.0		81	0.9	20	2503				
140.0		43	2.3	20	NMRV063	80A2	2597	284	
112.0		52	1.8	25			2797		
93.3		60	2.0	30			2973		
70.0		77	1.4	40			3272		
56.0		91	1.1	50			3524		
46.7		104	0.9	60			3745		
93.3		64	2.2	15			NMRV063		80B4
70.0		83	1.6	20	3272				
56.0		100	1.3	25	3524				
46.7		114	1.4	30	3745				
35.0		143	1.0	40	4122				






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.75	120.0	52	2.9	8	NMRV063	90S6	2734	284
	90.0	68	2.3	10			3009	
	60.0	97	1.6	15			3444	
	45.0	123	1.2	20			3791	
	36.0	149	0.9	25			4084	
	30.0	167	1.0	30			4339	
46.7	109	1.3	60	NMRV075	80A2	4421	285	
28.0	156	0.8	100			5241		
56.0	102	2.0	25	NMRV075	80B4	4160	285	
46.7	117	2.0	30			4421		
35.0	147	1.5	40			4865		
28.0	177	1.2	50			5241		
23.3	200	1.0	60			5569		
60.0	98	2.4	15	NMRV075	90S6	4065	285	
45.0	126	1.9	20			4474		
36.0	153	1.4	25			4820		
30.0	174	1.5	30			5122		
22.5	216	1.1	40			5637		
18.7	280	0.9	75	PC080+NMRV075	80B4	6000	293	
15.6	313	1.0	90			6375		
35.0	141	1.6	80	NMRV090	80A2	5383	286	
28.0	166	1.2	100			5799		
28.0	184	1.8	50	NMRV090	80B4	5799	286	
23.3	212	1.5	60			6163		
17.5	258	1.1	80			6783		
14.0	302	0.9	100			7306		
30.0	179	2.6	30			NMRV090		90S6
22.5	226	1.8	40	6238				
18.0	271	1.4	50	6719				
15.0	306	1.1	60	7140				
15.6	327	1.7	90	PC080+NMRV090	80B4	7054	294	
11.7	405	1.2	120			7764		
9.3	483	0.9	150			8180		
7.8	543	0.7	180			8180		
7.0	549	1.1	400	NMRV040/090	80A2	8180	298	
5.6	642	0.9	500			8180		
17.5	274	1.8	80	NMRV105	80B4	8571	287	
14.0	322	1.4	100			9232		
15.0	325	1.9	60	NMRV105	90S6	9023	287	
11.3	401	1.3	80			9931		
9.0	462	1.1	100			10320		
11.7	430	1.9	120	PC080+NMRV105	80B4	9811	294	
9.3	506	1.6	150			10320		
7.8	580	1.2	180			10320		
5.8	700	0.9	240			10320		
12.4	393	2.8	73	PC090+NMRV105	90S6	9614	294	
9.3	508	2.0	96.8			10320		
7.4	607	1.6	121			10320		






Performance 性能参数 NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)																																																																																																																																																																																																																																																																																																						
0.75	6.2	682	1.3	145.2	PC090+NMRV105	90S6	10320	294																																																																																																																																																																																																																																																																																																					
	4.6	832	0.9	193.6			10320			9.3	446	2.5	300	NMRV050/105	80A2	10320	298		7.0	563	1.8	400	10320		5.6	687	1.5	500	10320		4.7	871	1.3	300	NMRV050/105	80B4	10320	298		3.5	1126	0.9	400	10320		17.5	274	1.9	80	NMRV110	80B4	8571	288		14.0	322	1.5	100	9232		15.0	325	2.1	60	NMRV110	90S6	9023	288		11.3	401	1.4	80	9931		9.0	462	1.1	100	10320		11.7	430	2.2	120	PC080+NMRV110	80B4	9811	294		9.3	506	1.7	150	10320		7.8	580	1.3	180	10320		5.8	700	0.9	240	10320		12.4	393	3.2	73	PC090+NMRV110	90S6	9614	294		9.3	508	2.3	96.8	10320		7.4	607	1.8	121	10320		6.2	682	1.5	145.2	10320		4.6	832	1.0	193.6	10320		9.3	446	2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6	687	1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121	13500		6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2
	9.3	446	2.5	300	NMRV050/105	80A2	10320	298																																																																																																																																																																																																																																																																																																					
	7.0	563	1.8	400			10320																																																																																																																																																																																																																																																																																																						
	5.6	687	1.5	500			10320			4.7	871	1.3	300	NMRV050/105	80B4	10320	298		3.5	1126	0.9	400	10320		17.5	274	1.9	80	NMRV110	80B4	8571	288		14.0	322	1.5	100	9232		15.0	325	2.1	60	NMRV110	90S6	9023	288		11.3	401	1.4	80	9931		9.0	462	1.1	100	10320		11.7	430	2.2	120	PC080+NMRV110	80B4	9811	294		9.3	506	1.7	150	10320		7.8	580	1.3	180	10320		5.8	700	0.9	240			10320			12.4	393	3.2	73	PC090+NMRV110	90S6	9614	294		9.3	508	2.3	96.8	10320		7.4	607	1.8	121	10320		6.2			682		1.5	145.2	10320		4.6	832	1.0	193.6	10320		9.3	446	2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6	687	1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121			13500			6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9			2005		0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600			18000			1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000		
	4.7	871	1.3	300	NMRV050/105	80B4	10320	298																																																																																																																																																																																																																																																																																																					
	3.5	1126	0.9	400			10320			17.5	274	1.9	80	NMRV110	80B4	8571	288		14.0	322	1.5	100	9232		15.0	325	2.1	60	NMRV110	90S6	9023	288		11.3	401	1.4	80	9931		9.0	462	1.1	100			10320			11.7	430	2.2	120	PC080+NMRV110	80B4	9811	294		9.3	506	1.7	150	10320		7.8			580		1.3	180	10320		5.8	700	0.9	240	10320		12.4	393	3.2	73	PC090+NMRV110	90S6	9614	294		9.3	508	2.3	96.8	10320		7.4			607		1.8	121	10320		6.2	682	1.5	145.2	10320		4.6	832	1.0	193.6	10320		9.3	446	2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6			687		1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8			13500			7.4	607	2.6	121	13500		6.2	682	2.1	145.2			13500			4.6	832	1.5	193.6	13500		3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3			1631		1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3			1529		1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000								
	17.5	274	1.9	80	NMRV110	80B4	8571	288																																																																																																																																																																																																																																																																																																					
	14.0	322	1.5	100			9232			15.0	325	2.1	60	NMRV110	90S6	9023	288		11.3	401	1.4	80	9931		9.0	462	1.1	100			10320			11.7	430	2.2	120	PC080+NMRV110	80B4	9811	294		9.3	506	1.7	150	10320		7.8	580	1.3	180			10320			5.8	700	0.9	240	10320		12.4	393	3.2	73	PC090+NMRV110	90S6	9614	294		9.3	508	2.3	96.8	10320		7.4	607	1.8	121			10320			6.2	682	1.5	145.2	10320		4.6			832		1.0	193.6	10320		9.3	446	2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6			687		1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4			607		2.6	121	13500		6.2			682		2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9			2005		0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9			1783		1.3	750			18000			1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000																	
	15.0	325	2.1	60	NMRV110	90S6	9023	288																																																																																																																																																																																																																																																																																																					
	11.3	401	1.4	80			9931																																																																																																																																																																																																																																																																																																						
	9.0	462	1.1	100			10320			11.7	430	2.2	120	PC080+NMRV110	80B4	9811	294		9.3	506	1.7	150	10320		7.8	580	1.3	180	10320		5.8	700	0.9	240	10320		12.4			393		3.2	73	PC090+NMRV110	90S6	9614	294		9.3	508	2.3	96.8	10320		7.4	607	1.8	121	10320		6.2	682	1.5	145.2	10320		4.6			832		1.0	193.6	10320		9.3	446	2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6	687	1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121	13500		6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7			944		1.2	242	13500		2.8	1358	1.1	500			NMRV063/130		80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000			299			2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000																																																					
	11.7	430	2.2	120	PC080+NMRV110	80B4	9811	294																																																																																																																																																																																																																																																																																																					
	9.3	506	1.7	150			10320																																																																																																																																																																																																																																																																																																						
	7.8	580	1.3	180			10320																																																																																																																																																																																																																																																																																																						
	5.8	700	0.9	240			10320			12.4	393	3.2	73	PC090+NMRV110	90S6	9614	294		9.3	508	2.3	96.8	10320		7.4	607	1.8	121	10320		6.2	682	1.5	145.2	10320		4.6	832	1.0	193.6	10320		9.3			446		2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6	687	1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121	13500		6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7			944		1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000																																																																																									
	12.4	393	3.2	73	PC090+NMRV110	90S6	9614	294																																																																																																																																																																																																																																																																																																					
	9.3	508	2.3	96.8			10320																																																																																																																																																																																																																																																																																																						
	7.4	607	1.8	121			10320																																																																																																																																																																																																																																																																																																						
	6.2	682	1.5	145.2			10320																																																																																																																																																																																																																																																																																																						
	4.6	832	1.0	193.6			10320			9.3	446	2.8	300	NMRV050/110	80A2	10320	299		7.0	563	2.1	400	10320		5.6	687	1.6	500	10320		4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121	13500		6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7	944	1.2	242	13500		2.8			1358		1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000																																																																																																																													
	9.3	446	2.8	300	NMRV050/110	80A2	10320	299																																																																																																																																																																																																																																																																																																					
	7.0	563	2.1	400			10320																																																																																																																																																																																																																																																																																																						
	5.6	687	1.6	500			10320			4.7	871	1.5	300	NMRV050/110	80B4	10320	299		3.5	1126	1.1	400	10320		11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121	13500		6.2	682	2.1	145.2			13500			4.6	832	1.5	193.6	13500		3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900			13500			2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6			2215		0.9	900	18000		1.2	2680	1.0	1200	18000																																																																																																																																												
	4.7	871	1.5	300	NMRV050/110	80B4	10320	299																																																																																																																																																																																																																																																																																																					
	3.5	1126	1.1	400			10320			11.3	407	2.1	80	NMRV130	90S6	12989	289		9.0	470	1.7	100	13500		5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121			13500			6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6	13500		3.7	944	1.2	242			13500			2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9			2005		0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9			1783		1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000																																																																																																																																																								
	11.3	407	2.1	80	NMRV130	90S6	12989	289																																																																																																																																																																																																																																																																																																					
	9.0	470	1.7	100			13500			5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295		4.7	813	1.1	300	13500		12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121			13500			6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6			13500			3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750			13500			1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750			18000			1.6	2215	0.9	900	18000		1.2			2680		1.0	1200	18000																																																																																																																																																																				
	5.8	712	1.4	240	PC080+NMRV130	80B4	13500	295																																																																																																																																																																																																																																																																																																					
	4.7	813	1.1	300			13500			12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295		9.3	508	3.2	96.8	13500		7.4	607	2.6	121			13500			6.2	682	2.1	145.2	13500		4.6	832	1.5	193.6			13500			3.7	944	1.2	242	13500		2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750			13500			1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750			18000			1.6	2215	0.9	900	18000		1.2	2680	1.0	1200			18000																																																																																																																																																																																				
	12.4	399	4.4	73	PC090+NMRV130	90S6	12575	295																																																																																																																																																																																																																																																																																																					
	9.3	508	3.2	96.8			13500																																																																																																																																																																																																																																																																																																						
	7.4	607	2.6	121			13500																																																																																																																																																																																																																																																																																																						
	6.2	682	2.1	145.2			13500																																																																																																																																																																																																																																																																																																						
	4.6	832	1.5	193.6			13500																																																																																																																																																																																																																																																																																																						
	3.7	944	1.2	242			13500			2.8	1358	1.1	500	NMRV063/130	80B4	13500	299		2.3	1631	1.0	600	13500		1.9	2005	0.9	750	13500		1.6	2283	0.8	900	13500		2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200	18000																																																																																																																																																																																																																																									
	2.8	1358	1.1	500	NMRV063/130	80B4	13500	299																																																																																																																																																																																																																																																																																																					
	2.3	1631	1.0	600			13500																																																																																																																																																																																																																																																																																																						
	1.9	2005	0.9	750			13500																																																																																																																																																																																																																																																																																																						
	1.6	2283	0.8	900			13500			2.8	1291	1.8	500	NMRV063/150	80B4	18000	299		2.3	1529	1.7	600	18000		1.9	1783	1.3	750	18000		1.6	2215	0.9	900	18000		1.2	2680	1.0	1200			18000																																																																																																																																																																																																																																																																		
	2.8	1291	1.8	500	NMRV063/150	80B4	18000	299																																																																																																																																																																																																																																																																																																					
	2.3	1529	1.7	600			18000																																																																																																																																																																																																																																																																																																						
	1.9	1783	1.3	750			18000																																																																																																																																																																																																																																																																																																						
	1.6	2215	0.9	900			18000																																																																																																																																																																																																																																																																																																						
	1.2	2680	1.0	1200			18000																																																																																																																																																																																																																																																																																																						






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
0.92	280.0	28	2.2	5	NMRV050	80C4	1577	283
	186.7	41	1.7	7.5			1805	
	140.0	54	1.3	10			1987	
	93.3	77	1.0	15			2274	
	140.0	55	2.4	10	NMRV063	80C4	2597	284
	93.3	78	1.8	15			2973	
	70.0	102	1.3	20			3272	
	56.0	122	1.1	25			3524	
	46.7	139	1.1	30			3745	
	35.0	176	0.8	40			4122	
	70.0	103	2.0	20	NMRV075	80C4	3862	285
	56.0	126	1.6	25			4160	
	46.7	143	1.6	30			4421	
	35.0	181	1.2	40			4865	
	28.0	217	1.0	50			5241	
	23.3	245	0.8	60			5569	
	18.7	344	0.7	75	PC080+NMRV075	80C4	6000	293
	15.6	384	0.8	90			6375	
	28.0	226	1.5	50	NMRV090	80C4	5799	286
	23.3	260	1.2	60			6163	
	17.5	316	0.9	80			6783	
	15.6	401	1.4	90	PC080+NMRV090	80C4	7054	294
	11.7	497	1.0	120			7764	
	9.3	593	0.8	150			8180	
	17.5	336	1.5	80	NMRV105	80C4	8571	287
	14.0	395	1.2	100			9232	
	18.7	367	2.2	75	PC080+NMRV105	80C4	8388	294
	11.7	527	1.5	120			9811	
	9.3	621	1.3	150			10320	
	7.8	712	1.0	180			10320	
	4.7	1069	1.0	300	NMRV050/105	80C4	10320	298
	3.5	1382	0.7	400			10320	
	17.5	336	1.5	80	NMRV110	80C4	8571	288
	14.0	395	1.2	100			9232	
	18.7	367	2.5	75	PC080+NMRV110	80C4	8388	294
	11.7	527	1.8	120			9811	
	9.3	621	1.4	150			10320	
	7.8	712	1.1	180			10320	
	4.7	1069	1.2	300	NMRV050/110	80C4	10320	299
	3.5	1382	0.9	400			10320	
	3.5	1398	1.2	400	NMRV063/130	80C4	13500	299
	2.8	1665	0.9	500			13500	
	7.8	712	1.5	180	PC080+NMRV130	80C4	13500	295
	5.8	874	1.1	240			13500	
	4.7	998	0.9	300			13500	






Performance **性能参数** **NMRV**

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
0.92	2.8	1583	1.5	500	NMRV063/150	80C4	18000	299
	2.3	1875	1.4	600			18000	
	1.9	2188	1.1	750			18000	
	1.6	2717	0.8	900			18000	
	1.2	3288	0.8	1200			18000	
1.1	560.0	17	2.6	5	NMRV050	80B2	1251	283
	373.3	25	2.1	7.5			1433	
	280.0	33	1.6	10			1577	
	186.7	48	1.2	15			1805	
	140.0	62	0.9	20			1987	
	186.7	48	2.1	15	NMRV063	80B2	2359	284
	140.0	63	1.6	20			2597	
	112.0	77	1.2	25			2797	
	93.3	88	1.4	30			2973	
	70.0	113	1.0	40			3272	
	120.0	76	2.0	8	NMRV063	90L6	2734	284
	90.0	99	1.5	10			3009	
	60.0	142	1.1	15			3444	
	45.0	180	0.8	20			3791	
	186.7	50	2.6	8	NMRV063	90S4	2359	284
	140.0	65	2.0	10			2597	
	93.3	93	1.5	15			2973	
	70.0	122	1.1	20			3272	
	56.0	146	0.9	25			3524	
	46.7	167	1.0	30			3745	
112.0	78	1.9	25	NMRV075	80B2	3302	285	
93.3	90	1.9	30			3509		
70.0	116	1.4	40			3862		
56.0	139	1.1	50			4160		
46.7	160	0.9	60			4421		
90.0	100	2.3	10	NMRV075	90L6	3551	285	
60.0	144	1.6	15			4065		
45.0	184	1.3	20			4474		
36.0	225	1.0	25			4820		
30.0	256	1.0	30			5122		
93.3	96	2.1	15	NMRV075	90S4	3509	285	
70.0	123	1.7	20			3862		
56.0	150	1.3	25			4160		
46.7	171	1.3	30			4421		
35.0	216	1.0	40			4865		
35.0	207	1.1	80	NMRV090	80B2	5383	286	
28.0	244	0.8	100			5799		
36.0	231	1.6	25	NMRV090	90L6	5333	286	
30.0	263	1.8	30			5667		
22.5	331	1.2	40			6238		
18.0	397	1.0	50			6719		
15.0	448	0.8	60			7140		






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
1.1	35.0	225	1.6	40	NMRV090	90S4	5383	286
	28.0	270	1.3	50			5799	
	23.3	311	1.0	60			6163	
	22.5	345	2.0	40	NMRV105	90L6	7882	287
	18.0	414	1.6	50			8491	
	15.0	476	1.3	60			9023	
	11.3	588	0.9	80			9931	
	28.0	281	2.1	50	NMRV105	90S4	7328	287
	23.3	324	1.7	60			7787	
	17.5	402	1.2	80			8571	
	14.0	473	1.0	100			9232	
	12.4	576	1.9	73	PC090+NMRV105	90L6	9614	294
	9.3	746	1.4	96.8			10320	
	7.4	890	1.1	121			10320	
	6.2	1000	0.9	145.2			10320	
	19.3	392	2.2	73	PC090+NMRV105	90S4	8298	294
	14.5	508	1.6	96.8			9133	
	11.6	599	1.3	121			9838	
	9.6	686	1.0	145.2			10320	
	7.2	828	0.8	193.6			10320	
	9.3	654	1.7	300	NMRV050/105	80B2	10320	298
	7.0	845	1.2	400			10320	
	5.6	1007	1.0	500			10320	
	22.5	345	2.3	40	NMRV110	90L6	7882	288
	18.0	414	1.8	50			8491	
	15.0	476	1.4	60			9023	
	11.3	588	1.0	80			9931	
	28.0	281	2.3	50	NMRV110	90S4	7328	288
	23.3	324	1.9	60			7787	
	17.5	402	1.3	80			8571	
	14.0	473	1.0	100			9232	
	12.4	576	2.2	73	PC090+NMRV110	90L6	9614	294
	9.3	746	1.6	96.8			10320	
	7.4	890	1.2	121			10320	
	6.2	1000	1.0	145.2			10320	
	19.3	392	2.5	73	PC090+NMRV110	90S4	8298	294
	14.5	508	1.8	96.8			9133	
	11.6	599	1.5	121			9838	
	9.6	686	1.1	145.2			10320	
	7.2	828	0.8	193.6			10320	
	9.3	654	1.9	300	NMRV050/110	80B2	10320	299
	7.0	845	1.4	400			10320	
	5.6	1007	1.1	500			10320	
	11.3	598	1.4	80	NMRV130	90L6	12989	289
	9.0	689	1.1	100			13500	
	17.5	408	2.1	80	NMRV130	90S4	11210	289
	14.0	480	1.5	100			12076	






Performance 性能参数 **NMRV**

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
1.1	12.4	585	3.0	73	PC090+NMRV130	90L6	12575	295
	9.3	746	2.2	96.8			13500	
	7.4	890	1.7	121			13500	
	6.2	1000	1.4	145.2			13500	
	4.6	1220	1.0	193.6			13500	
	19.3	398	3.5	73	PC090+NMRV130	90S4	10853	295
	14.5	508	2.6	96.8			11945	
	11.6	608	2.0	121			12868	
	9.6	686	1.6	145.2			13500	
	7.2	843	1.2	193.6			13500	
	5.8	962	0.9	242	13500			
	4.7	1312	1.3	300	NMRV063/130	90S4	13500	299
	3.5	1671	1.0	400			13500	
	2.8	1991	0.8	500			13500	
	9.3	753	3.1	150	NMRV063/150	90S4	18000	299
7.0	966	2.4	200	18000				
5.6	1175	1.7	250	18000				
4.7	1364	1.7	300	18000				
3.5	1619	1.6	400	18000				
2.8	1893	1.2	500	18000				
2.3	2242	1.2	600	18000				
1.9	2616	0.9	750	18000				
1.5	560.0	23	1.9	5			NMRV050	
	373.3	35	1.5	7.5	1433			
	280.0	45	1.2	10	1577			
	186.7	65	0.9	15	1805			
	186.7	68	1.9	8	NMRV063	90L4	2359	284
	140.0	89	1.5	10			2597	
	93.3	127	1.1	15			2973	
	70.0	166	0.8	20			3272	
	373.3	35	2.7	8	NMRV063	90S2	1873	284
	280.0	46	2.1	10			2061	
	186.7	66	1.6	15			2359	
	140.0	86	1.2	20			2597	
	112.0	105	0.9	25			2797	
	93.3	120	1.0	30			2973	
	120.0	105	2.0	8	NMRV075	100LA6	3227	285
	90.0	137	1.7	10			3551	
	60.0	196	1.2	15			4065	
	56.0	189	0.8	50	NMRV075	90S2	4160	285
	46.7	218	0.7	60			4421	
	140.0	90	2.2	10	NMRV075	90L4	3065	285
	93.3	130	1.5	15			3509	
	70.0	168	1.3	20			3862	
	56.0	205	1.0	25			4160	
	46.7	233	1.0	30			4421	
	280.0	46	3.1	10			NMRV075	
	186.7	67	2.2	15	2785			






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
1.5	140.0	87	1.8	20	NMRV075	90S2	3065	285
	112.0	106	1.4	25			3302	
	93.3	123	1.4	30			3509	
	70.0	158	1.0	40			3862	
	90.0	138	2.7	10	NMRV090	100LA6	3929	286
	60.0	201	2.1	15			4498	
	45.0	258	1.5	20			4951	
	36.0	314	1.2	25			5333	
	30.0	358	1.3	30			5667	
	70.0	172	2.1	20	NMRV090	90L4	4273	286
	56.0	210	1.6	25			4603	
	46.7	239	1.7	30			4891	
	35.0	307	1.2	40			5383	
	28.0	368	0.9	50			5799	
	23.3	424	0.8	60			6163	
	56.0	194	1.4	50	NMRV090	90S2	4603	286
	46.7	227	1.1	60			4891	
	45.0	264	2.4	20	NMRV105	100LA6	6256	287
	36.0	322	2.0	25			6739	
	30.0	363	2.0	30			7161	
	22.5	471	1.5	40			7882	
	18.0	565	1.2	50			8491	
	15.0	649	1.0	60			9023	
	35.0	319	1.9	40	NMRV105	90L4	6803	287
	28.0	384	1.6	50			7328	
	23.3	442	1.3	60			7787	
	17.5	548	0.9	80			8571	
	46.7	236	1.8	60	NMRV105	90S2	6181	287
	35.0	299	1.3	80			6803	
	28.0	353	1.0	100			7328	
	19.3	535	1.6	73	PC090+NMRV105	90L4	8298	294
	14.5	693	1.2	96.8			9133	
	11.6	817	1.0	121			9838	
	9.6	936	0.8	145.2			10320	
	9.3	891	1.2	300	NMRV050/105	90S2	10320	298
	7.0	1153	0.9	400			10320	
	5.6	1373	0.7	500			10320	
	45.0	264	2.7	20	NMRV110	100LA6	6256	288
	36.0	322	2.4	25			6739	
	30.0	363	2.3	30			7161	
	22.5	471	1.7	40			7882	
	18.0	565	1.3	50			8491	
	15.0	649	1.1	60			9023	
	35.0	319	2.2	40	NMRV110	90L4	6803	288
	28.0	384	1.7	50			7328	
	23.3	442	1.4	60			7787	
	17.5	548	0.9	80			8571	
	46.7	236	2.0	60			NMRV110	
	35.0	299	1.3	80	6803			
	28.0	353	1.0	100	7328			






Performance 性能参数 NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
1.5	19.3	535	1.9	73	PC090+NMRV110	90L4	8298	294
	14.5	693	1.3	96.8			9133	
	11.6	817	1.1	121			9838	
	9.6	936	0.8	145.2			10320	
	9.3	891	1.4	300	NMRV050/110	90S2	10320	299
	7.0	1153	1.0	400			10320	
	5.6	1373	0.8	500			10320	
	22.5	478	2.3	40	NMRV130	100LA6	10309	289
	18.0	573	1.8	50			11105	
	15.0	659	1.4	60			11801	
	11.3	815	1.1	80			12989	
	17.5	557	1.5	80	NMRV130	90L4	11210	289
14.0	655	1.1	100	12076				
19.3	542	2.6	73	PC090+NMRV130	90L4	10853	295	
14.5	693	1.9	96.8			11945		
11.6	830	1.5	121			12868		
9.6	936	1.1	145.2			13500		
7.2	1149	0.8	194			13500		
9.3	915	1.9	300	NMRV063/130	90S2	13500	299	
7.0	1166	1.4	400			13500		
5.6	1389	1.1	500			13500		
4.7	1789	1.0	300	NMRV063/130	90L4	13500	299	
3.5	2279	0.7	400			13500		
9.3	1026	2.3	150	NMRV063/150	90L4	18000	299	
7.0	1317	1.8	200			18000		
5.6	1602	1.3	250			18000		
4.7	1860	1.3	300			18000		
3.5	2208	1.2	400			18000		
2.8	2582	0.9	500			18000		
2.3	3057	0.9	600			18000		
186.7	83	1.5	8			NMRV063		90LL4
140.0	109	1.2	10	2597				
93.3	156	0.9	15	2973				
186.7	84	2.2	8	NMRV075	90LL4	2785	285	
140.0	110	1.8	10			3065		
93.3	160	1.2	15			3509		
70.0	206	1.0	20			3862		
56.0	251	0.8	25			4160		
46.7	286	0.8	30			4421		
70.0	211	1.7	20			NMRV090		90LL4
56.0	257	1.3	25	4603				
46.7	294	1.4	30	4891				
35.0	377	1.0	40	5383				
28.0	452	0.8	50	5799				
56.0	264	2.2	25	NMRV105	90LL4		5816	
35.0	392	1.6	40			6803		
28.0	471	1.3	50			7328		
23.3	542	1.0	60			7787		






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
1.84	19.3	656	1.3	73	PC090+NMRV105	90LL4	8298	294
	14.5	850	1.0	96.8			9133	
	11.6	1002	0.8	121			9838	
	56.0	264	2.6	25	NMRV110	90LL4	5816	288
	35.0	392	1.8	40			6803	
	28.0	471	1.4	50			7328	
	23.3	542	1.1	60			7787	
	19.3	656	1.5	73	PC090+NMRV110	90LL4	8298	294
	14.5	850	1.1	96.8			9133	
	11.6	1002	0.9	121			9838	
	17.5	683	1.2	80	NMRV130	90LL4	11210	289
	14.0	803	0.9	100			12076	
19.3	665	2.1	73	PC090+NMRV130	90LL4	10853	295	
14.5	850	1.5	96.8			11945		
11.6	1018	1.2	121			12868		
9.6	1148	0.9	145.2			13500		
9.3	1259	1.9	150	NMRV063/150	90LL4	18000	299	
7.0	1616	1.4	200			18000		
5.6	1966	1.0	250			18000		
4.7	2281	1.0	300			18000		
3.5	2708	1.0	400			18000		
2.8	3167	0.7	500			18000		
2.2	373.3	51	1.8	8	NMRV063	90L2	1873	284
	280.0	67	1.5	10			2061	
	186.7	97	1.1	15			2359	
	186.7	100	1.8	8	NMRV075	100LA4	2785	285
	140.0	132	1.5	10			3065	
	93.3	191	1.0	15			3509	
	373.3	51	2.5	8	NMRV075	90L2	2210	285
	280.0	68	2.1	10			2433	
	186.7	98	1.5	15			2785	
	140.0	128	1.3	20			3065	
	112.0	156	1.0	25			3302	
	93.3	180	0.9	30			3509	
	186.7	101	2.9	8	NMRV090	100LA4	3081	286
	140.0	134	2.3	10			3391	
	93.3	194	1.9	15			3882	
	70.0	252	1.4	20			4273	
	56.0	308	1.1	25			4603	
	46.7	351	1.2	30			4891	
	120.0	156	2.2	8	NMRV090	112M6	3570	286
	90.0	203	1.8	10			3929	
	60.0	294	1.4	15			4498	
	45.0	378	1.0	20			4951	
	140.0	131	2.0	20	NMRV090	90L2	3391	286
	112.0	159	1.6	25			3653	
93.3	185	1.7	30	3882				
70.0	237	1.2	40	4273				
56.0	285	0.9	50	4603				






Performance 性能参数 **NMRV**

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
2.2	70.0	255	2.2	20	NMRV105	100LA4	5399	287
	56.0	315	1.9	25			5816	
	46.7	356	1.8	30			6181	
	35.0	468	1.3	40			6803	
	28.0	563	1.1	50			7328	
23.3	648	0.9	60	7787				
	90.0	205	3.0	10	NMRV105	112M6	4965	287
	60.0	298	2.2	15			5684	
	45.0	388	1.6	20			6256	
	36.0	473	1.4	25			6739	
	30.0	532	1.4	30			7161	
	112.0	163	2.7	25	NMRV105	90L2	4616	287
	93.3	187	2.6	30			4905	
	70.0	246	1.9	40			5399	
	56.0	296	1.5	50			5816	
	46.7	347	1.2	60			6181	
	38.6	398	1.8	73	PC090+NMRV105	90L2	6586	294
	28.9	516	1.3	96.8			7249	
	23.1	617	1.1	121			7809	
	70.0	255	2.5	20	NMRV110	100LA4	5399	288
	56.0	315	2.2	25			5816	
	46.7	356	2.0	30			6181	
	35.0	468	1.5	40			6803	
	28.0	563	1.2	50			7328	
	23.3	648	1.0	60	7787			
	90.0	205	3.5	10	NMRV110	112M6	4965	288
	60.0	298	2.6	15			5684	
	45.0	388	1.9	20			6256	
	36.0	473	1.6	25			6739	
	30.0	532	1.6	30			7161	
	112.0	163	3.1	25	NMRV110	90L2	4616	288
	93.3	187	3.0	30			4905	
	70.0	246	2.1	40			5399	
	56.0	296	1.7	50			5816	
	46.7	347	1.4	60			6181	
	38.6	398	2.1	73	PC090+NMRV110	90L2	6586	294
	28.9	516	1.5	96.8			7249	
	23.1	617	1.2	121			7809	
	35.0	468	2.2	40	NMRV130	100LA4	8897	289
	28.0	563	1.7	50			9584	
	23.3	648	1.4	60			10185	
	17.5	816	1.0	80			11210	
	36.0	479	2.2	25			NMRV130	
	30.0	546	2.1	30	9366			
	22.5	700	1.6	40	10309			
	18.0	840	1.2	50	11105			
	15.0	966	1.0	60	11801			
	35.0	438	1.3	80	NMRV130	90L2	8897	289
	28.0	525	1.0	100			9584	






NMRV Performance 性能参数

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
2.2	38.6	409	2.9	73	PC090+NMRV130	90L2	8614	295
	28.9	545	2.0	96.8			9481	
	23.1	654	1.6	121			10213	
	19.3	752	1.3	145.2			10853	
	28.0	570	2.5	50	NMRV150	100LA4	13103	290
	23.3	657	1.9	60			13924	
	17.5	816	1.4	80			15325	
	14.0	960	1.0	100			16508	
3	373.3	70	1.9	8	NMRV075	100LA2	2210	285
	280.0	92	1.6	10			2433	
	186.7	137	1.4	8	NMRV075	100LB4	2785	285
	140.0	180	1.1	10			3065	
	93.3	261	0.8	15			3509	
	373.3	71	3.0	8	NMRV090	100LA2	2446	286
	280.0	92	2.6	10			2692	
	186.7	138	2.1	8	NMRV090	100LB4	3081	286
	140.0	182	1.7	10			3391	
	93.3	264	1.4	15			3882	
	70.0	344	1.0	20			4273	
	56.0	420	0.8	25			4603	
	46.7	479	0.9	30			4891	
	93.3	264	2.2	15	NMRV105	100LB4	4905	287
	70.0	348	1.6	20			5399	
	56.0	430	1.4	25			5816	
	46.7	485	1.3	30			6181	
	35.0	638	1.0	40			6803	
	28.0	767	0.8	50			7328	
	120.0	212	2.7	8	NMRV105	132S6	4511	287
	90.0	280	2.2	10			4965	
	60.0	406	1.6	15			5684	
	45.0	528	1.2	20			6256	
	93.3	264	2.5	15	NMRV110	100LB4	4905	288
	70.0	348	1.9	20			5399	
	56.0	430	1.6	25			5816	
	46.7	485	1.5	30			6181	
	35.0	638	1.1	40			6803	
	28.0	767	0.9	50			7328	
	120.0	212	3.1	8	NMRV110	132S6	4511	288
	90.0	280	2.5	10			4965	
	60.0	406	1.9	15			5684	
	45.0	528	1.4	20			6256	
	56.0	430	2.2	25	NMRV130	100LB4	7607	289
	46.7	491	2.1	30			8084	
	35.0	638	1.6	40			8897	
	28.0	767	1.3	50			9584	
	23.3	884	1.0	60			10185	
	17.5	1113	0.8	80			11210	
	90.0	280	3.4	10	NMRV130	132S6	6494	289
	60.0	406	2.6	15			7434	
	45.0	535	1.9	20			8182	






Performance 性能参数 NMRV

P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型号		Fr2 (N)	
3	36.0	653	1.6	25	NMRV130	132S6	8814	289
	30.0	745	1.6	30			9366	
	22.5	955	1.2	40			10309	
	28.0	778	1.8	50	NMRV150	100LB4	13103	290
	23.3	896	1.4	60			13924	
	17.5	1113	1.0	80			15325	
14.0	1310	0.8	100	16508				
4	373.3	93	1.4	8	NMRV075	112M2	2210	285
	280.0	123	1.2	10			2433	
	186.7	182	1.0	7.5			2785	
	140.0	240	0.8	10			3065	
	373.3	94	2.2	8	NMRV090	112M2	2446	286
	280.0	123	1.9	10			2692	
	186.7	184	1.6	8	NMRV090	112M4	3081	286
	140.0	243	1.3	10			3391	
	93.3	352	1.0	15			3882	
	70.0	458	0.8	20			4273	
	140.0	243	2.1	10			NMRV105	
	93.3	352	1.6	15	4905			
	70.0	464	1.2	20	5399			
	56.0	573	1.0	25	5816			
	46.7	647	1.0	30	6181			
	120.0	283	2.0	8	NMRV105	132M6	4511	287
	90.0	374	1.7	10			4965	
	60.0	541	1.2	15			5684	
	140.0	243	2.5	10	NMRV110	112M4	4285	288
	93.3	352	1.9	15			4905	
	70.0	464	1.4	20			5399	
	56.0	573	1.2	25			5816	
	46.7	647	1.1	30			6181	
	120.0	283	2.3	8	NMRV110	132M6	4511	288
90.0	374	1.9	10	4965				
60.0	541	1.4	15	5684				
56.0	573	1.6	25	NMRV130	112M4	7607	289	
46.7	655	1.6	30			8084		
35.0	851	1.2	40			8897		
28.0	1023	1.0	50			9584		
23.3	1179	0.8	60			10185		
120.0	287	3.1	8			NMRV130		132M6
90.0	374	2.6	10	6494				
60.0	541	2.0	15	7434				
45.0	713	1.5	20	8182				
36.0	870	1.2	25	8814				
28.0	1037	1.4	50	NMRV150	112M4		13103	
23.3	1195	1.1	60			13924		
17.5	1484	0.8	80			15325		
4.8	186.7	221	1.3	8	NMRV090	112MS4	3081	286
	140.0	291	1.1	10			3391	
	93.3	422	0.9	15			3882	



NMRV Performance 性能参数


P1 (kW)	n2 (1/min)	M2 (Nm)	f.s.	i	型 号		Fr2 (N)	
4.8	186.7	221	2.2	8	NMRV105	112MS4	3893	287
	140.0	291	1.8	10			4285	
	93.3	422	1.3	15			4905	
	70.0	557	1.0	20			5399	
	56.0	688	0.9	25			5816	
	186.7	221	2.5	8	NMRV110	112MS4	3893	288
	140.0	291	2.1	10			4285	
	93.3	422	1.6	15			4905	
	70.0	557	1.2	20			5399	
	56.0	688	1.0	25			5816	
	56.0	688	1.4	25	NMRV130	112MS4	7607	289
	46.7	786	1.3	30			8084	
	35.0	1022	1.0	40			8897	
	28.0	1228	0.8	50			9584	
	28.0	1244	1.1	50			13103	
	23.3	1434	0.9	60			13924	
	5.5	186.7	253	1.9			8	
140.0		334	1.6	10	4285			
93.3		484	1.2	15	4905			
70.0		638	0.9	20	5399			
186.7		253	2.2	8	NMRV110	132S4	3893	288
140.0	334	1.8	10	4285				
93.3	484	1.4	15	4905				
70.0	638	1.0	20	5399				
140.0	334	2.5	10	NMRV130			132S4	
93.3	490	1.9	15		6416			
70.0	645	1.4	20		7062			
56.0	788	1.2	25		7607			
46.7	900	1.2	30		8084			
35.0	1171	0.9	40		8897			
	70.0	645	2.0	20	NMRV150	132S4	9654	290
	56.0	788	1.5	25			10400	
	46.7	934	1.3	30			11051	
	35.0	1171	1.3	40			12163	
	28.0	1426	1.0	50			13103	
	23.3	1643	0.8	60			13924	
	7.5	186.7	345	1.4			8	
140.0		455	1.1	10	4285			
93.3		660	0.9	15	4905			
	186.7	345	1.6	8	NMRV110	132L4	3893	288
	140.0	455	1.3	10			4285	
	93.3	660	1.0	15			4905	
	186.7	349	2.1	8	NMRV130	132L4	5092	289
	140.0	455	1.8	10			5605	
	93.3	668	1.4	15			6416	
	70.0	880	1.0	20			7062	
	56.0	1074	0.9	25			7607	
	46.7	1228	0.8	30			8084	
	35.0	1596	0.7	40			8897	



NRV Performance 性能参数

(n1=2800)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)			
12	5	0.79	560.0	NRV030	474	115	302		
13	7.5	0.58	373.3		542	125			
13	10	0.45	280.0		597	140			
13	15	0.31	186.7		683	140			
12	20	0.23	140.0		752	146			
16	25	0.25	112.0		810	210			
15	30	0.21	93.3		861	210			
14	40	0.16	70.0		948	127			
13	50	0.12	56.0		1021	128			
12	60	0.10	46.7		1085	126			
11	80	0.08	35.0		1194	130			
24	5	1.6	560.0	NRV040	912	200	302		
28	7.5	1.2	373.3		1044	233			
29	10	1.0	280.0		1149	272			
31	15	0.72	186.7		1315	291			
29	20	0.52	140.0		1447	204			
28	25	0.42	112.0		1559	236			
34	30	0.44	93.3		1657	350			
31	40	0.32	70.0		1824	350			
30	50	0.26	56.0		1964	350			
28	60	0.21	46.7		2087	350			
25	80	0.16	35.0		2298	350			
23	100	0.12	28.0		2475	350			
45	5	2.9	560.0		NRV050	1251		280	302
52	7.5	2.3	373.3	1433		324			
54	10	1.8	280.0	1577		378			
57	15	1.3	186.7	1805		399			
53	20	0.95	140.0	1987		417			
51	25	0.75	112.0	2140		482			
64	30	0.82	93.3	2274		490			
59	40	0.59	70.0	2503		490			
53	50	0.45	56.0	2696		490			
50	60	0.37	46.7	2865		490			
45	80	0.27	35.0	3153		490			
40	100	0.21	28.0	3397		490			
93	7.5	4.0	373.3	NRV063		1873	395	302	
97	10	3.2	280.0		2061	463			
103	15	2.3	186.7		2359	492			
100	20	1.7	140.0		2597	538			
92	25	1.3	112.0		2797	593			
120	30	1.5	93.3		2973	700			
108	40	1.1	70.0		3272	700			
100	50	0.83	56.0		3524	700			
95	60	0.68	46.7		3745	700			
85	80	0.49	35.0		4122	700			
74	100	0.37	28.0		4440	700			
130	7.5	5.6	373.3		NRV075	2210	560		302
145	10	4.7	280.0			2433	703		
150	15	3.4	186.7	2785		727			
160	20	2.8	140.0	3065		872			
150	25	2.1	112.0	3302		980			
170	30	2.1	93.3	3509		980			
165	40	1.6	70.0	3862		980			
150	50	1.2	56.0	4160		980			
145	60	1.0	46.7	4421		980			
130	80	0.72	35.0	4865		980			
120	100	0.58	28.0	5241		980			




Performance 性能参数

NRV

(n1=2800)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
210	7.5	8.9	373.3	NRV090	2446	715	302
235	10	7.7	280.0		2692	900	
270	15	6.0	186.7		3081	1034	
260	20	4.4	140.0		3391	1120	
250	25	3.4	112.0		3653	1270	
310	30	3.7	93.3		3882	1270	
275	40	2.6	70.0		4273	1270	
265	50	2.0	56.0		4603	1270	
245	60	1.6	46.7		4891	1270	
225	80	1.2	35.0		5383	1270	
200	100	0.9	28.0		5799	1270	
340	7.5	14.4	373.3	NRV105	3090	950	302
380	10	12.2	280.0		3401	1194	
425	15	9.3	186.7		3893	1336	
420	20	7.0	140.0		4285	1485	
440	25	5.9	112.0		4616	1700	
480	30	5.7	93.3		4905	1700	
460	40	4.1	70.0		5399	1700	
450	50	3.3	56.0		5816	1700	
430	60	2.7	46.7		6181	1700	
380	80	1.9	35.0		6803	1700	
350	100	1.5	28.0		7328	1700	
391	7.5	16.6	373.3	NRV110	3090	950	302
437	10	14.1	280.0		3401	1194	
489	15	10.7	186.7		3893	1337	
483	20	8.0	140.0		4285	1485	
506	25	6.8	112.0		4616	1700	
552	30	6.5	93.3		4905	1700	
529	40	4.7	70.0		5399	1700	
495	50	3.7	56.0		5816	1700	
473	60	3.0	46.7		6181	1700	
399	80	2.0	35.0		6803	1700	
368	100	1.6	28.0		7328	1700	
520	7.5	22.1	373.3	NRV130	4042	1190	302
580	10	18.7	280.0		4449	1493	
670	15	14.7	186.7		5092	1725	
660	20	11.0	140.0		5605	1912	
670	25	9.0	112.0		6038	2100	
770	30	9.0	93.3		6416	2100	
730	40	6.5	70.0		7062	2100	
700	50	5.1	56.0		7607	2100	
640	60	4.0	46.7		8084	2100	
590	80	3.0	35.0		8897	2100	
520	100	2.2	28.0		9584	2100	
840	7.5	35.7	373.3	NRV150	5526	1550	302
890	10	28.4	280.0		6082	1848	
910	15	19.8	186.7		6962	1889	
980	20	16.1	140.0		7663	2289	
890	25	12.0	112.0		8254	2494	
920	30	10.5	93.3		8771	2800	
1200	40	10.6	70.0		9654	2800	
1100	50	8.1	56.0		10400	2800	
990	60	6.2	46.7		11051	2800	
920	80	4.6	35.0		12163	2800	
810	100	3.3	28.0		13103	2800	



NRV Performance 性能参数

(n1=1400)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)			
18	5	0.61	280.0	NRV030	597	150	302		
18	7.5	0.41	186.7		683	150			
18	10	0.32	140.0		752	169			
18	15	0.23	93.3		861	169			
18	20	0.18	70.0		948	190			
21	25	0.18	56.0		1021	210			
20	30	0.15	46.7		1085	210			
18	40	0.11	35.0		1194	210			
17	50	0.09	28.0		1286	210			
16	60	0.08	23.3		1367	210			
13	80	0.05	17.5		1504	210			
34	5	1.1	280.0	NRV040	1149	250	302		
40	7.5	0.90	186.7		1315	294			
40	10	0.69	140.0		1447	331			
40	15	0.48	93.3		1657	331			
39	20	0.37	70.0		1824	350			
38	25	0.30	56.0		1964	350			
38	25	0.30	56.0		1964	350			
45	30	0.31	46.7		2087	350			
41	40	0.23	35.0		2298	350			
39	50	0.18	28.0		2475	350			
36	60	0.15	23.3		2630	350			
33	80	0.12	17.5		2895	350			
29	100	0.09	14.0		3118	350			
62	5	2.0	280.0	NRV050	1577	350	302		
71	7.5	1.6	186.7		1805	401			
72	10	1.2	140.0		1987	490			
74	15	0.88	93.3		2274	490			
73	20	0.68	70.0		2503	490			
70	25	0.54	56.0		2696	490			
84	30	0.57	46.7		2865	490			
76	40	0.42	35.0		3153	490			
73	50	0.34	28.0		3397	490			
68	60	0.28	23.3		3610	490			
65	80	0.22	17.5		3973	490			
55	100	0.16	14.0		4280	490			
128	7.5	2.8	186.7		NRV063	2359		500	302
130	10	2.2	140.0			2597		571	
140	15	1.6	93.3	2973		615			
135	20	1.2	70.0	3272		667			
130	25	1.0	56.0	3524		700			
160	30	1.1	46.7	3745		700			
145	40	0.76	35.0	4122		700			
135	50	0.60	28.0	4440		700			
130	60	0.51	23.3	4719		700			
122	80	0.39	17.5	5193		700			
118	100	0.34	14.0	5595		700			
185	7.5	4.1	186.7	NRV075	2785	700	302		
195	10	3.2	140.0		3065	830			
200	15	2.3	93.3		3509	851			
210	20	1.9	70.0		3862	980			
200	25	1.5	56.0		4160	980			
230	30	1.5	46.7		4421	980			
220	40	1.1	35.0		4865	980			
210	50	0.89	28.0		5241	980			
200	60	0.75	23.3		5569	980			
190	80	0.58	17.5		6130	980			
180	100	0.48	14.0		6603	980			




Performance 性能参数

NRV

(n1=1400)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
290	7.5	6.3	186.7	NRV090	3081	900	302
310	10	5.1	140.0		3391	1082	
360	15	4.1	93.3		3882	1257	
355	20	3.1	70.0		4273	1270	
340	25	2.4	56.0		4603	1270	
410	30	2.6	46.7		4891	1270	
360	40	1.8	35.0		5383	1270	
340	50	1.4	28.0		5799	1270	
320	60	1.1	23.3		6163	1270	
285	80	0.83	17.5		6783	1270	
270	100	0.67	14.0		7306	1270	
480	7.5	10.4	186.7		NRV105	3893	
520	10	8.6	140.0	4285		1463	
570	15	6.5	93.3	4905		1603	
560	20	4.8	70.0	5399		1700	
590	25	4.1	56.0	5816		1700	
630	30	3.9	46.7	6181		1700	
610	40	2.9	35.0	6803		1700	
600	50	2.3	28.0	7328		1700	
560	60	1.9	23.3	7787		1700	
490	80	1.3	17.5	8571		1700	
460	100	1.1	14.0	9232		1700	
552	7.5	12.0	186.7	NRV110		3893	1200
598	10	9.8	140.0		4285	1463	
656	15	7.5	93.3		4905	1604	
644	20	5.6	70.0		5399	1700	
679	25	4.7	56.0		5816	1700	
725	30	4.5	46.7		6181	1700	
702	40	3.3	35.0		6803	1700	
660	50	2.6	28.0		7328	1700	
616	60	2.1	23.3		7787	1700	
515	80	1.4	17.5		8571	1700	
483	100	1.1	14.0		9232	1700	
750	7.5	16.1	186.7		NRV130	5092	1500
820	10	13.5	140.0	5605		1845	
920	15	10.3	93.3	6416		2070	
910	20	7.8	70.0	7062		2100	
930	25	6.5	56.0	7607		2100	
1040	30	6.4	46.7	8084		2100	
1050	40	4.9	35.0	8897		2100	
980	50	3.8	28.0	9584		2100	
900	60	3.1	23.3	10185		2100	
840	80	2.3	17.5	11210		2100	
740	100	1.7	14.0	12076		2100	
1200	7.5	25.8	186.7	NRV150		6962	1950
1240	10	20.2	140.0		7663	2267	
1250	15	13.9	93.3		8771	2285	
1300	20	11.1	70.0		9654	2674	
1200	25	8.4	56.0		10400	2800	
1200	30	7.1	46.7		11051	2800	
1550	40	7.3	35.0		12163	2800	
1400	50	5.4	28.0		13103	2800	
1260	60	4.2	23.3		13924	2800	
1150	80	3.1	17.5		15325	2800	
1000	100	2.3	14.0		16508	2800	



NRV Performance 性能参数

(n1=900)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
20	5	0.44	180.0	NRV030	692	175	302
20	7.5	0.30	120.0		792	175	
20	10	0.24	90.0		871	197	
20	15	0.17	60.0		997	197	
20	20	0.13	45.0		1098	210	
23	25	0.14	36.0		1183	210	
21	30	0.11	30.0		1257	210	
20	40	0.09	22.5		1383	210	
18	50	0.07	18.0		1490	210	
17	60	0.06	15.0		1583	210	
15	80	0.04	11.3		1743	210	
40	5	0.87	180.0	NRV040	1331	290	302
44	7.5	0.65	120.0		1524	319	
44	10	0.50	90.0		1677	350	
45	15	0.36	60.0		1920	350	
44	20	0.28	45.0		2113	350	
43	25	0.23	36.0		2276	350	
49	30	0.23	30.0		2419	350	
45	40	0.17	22.5		2662	350	
42	50	0.14	18.0		2868	350	
39	60	0.11	15.0		3047	350	
35	80	0.09	11.3		3354	350	
32	100	0.07	9.0	3490	350		
75	5	1.6	180.0	NRV050	1827	400	302
84	7.5	1.2	120.0		2091	448	
84	10	0.94	90.0		2302	490	
84	15	0.67	60.0		2635	490	
77	20	0.48	45.0		2900	490	
75	25	0.39	36.0		3124	490	
90	30	0.42	30.0		3320	490	
82	40	0.31	22.5		3654	490	
77	50	0.25	18.0		3936	490	
72	60	0.21	15.0		4183	490	
68	80	0.16	11.3		4604	490	
56	100	0.12	9.0	4840	490		
151	7.5	2.2	120.0	NRV063	2734	580	302
153	10	1.7	90.0		3009	661	
155	15	1.2	60.0		3444	670	
148	20	0.91	45.0		3791	700	
137	25	0.69	36.0		4084	700	
175	30	0.79	30.0		4339	700	
160	40	0.58	22.5		4776	700	
145	50	0.45	18.0		5145	700	
138	60	0.37	15.0		5467	700	
128	80	0.29	11.3		6018	700	
124	100	0.25	9.0		6270	700	
215	7.5	3.1	120.0	NRV075	3227	810	302
230	10	2.5	90.0		3551	975	
235	15	1.8	60.0		4065	980	
235	20	1.4	45.0		4474	980	
215	25	1.1	36.0		4820	980	
260	30	1.1	30.0		5122	980	
240	40	0.83	22.5		5637	980	
220	50	0.65	18.0		6073	980	
210	60	0.54	15.0		6453	980	
200	80	0.43	11.3		7103	980	
190	100	0.36	9.0		7380	980	




Performance 性能参数

NRV

(n1=900)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
340	7.5	4.8	120.0	NRV090	3570	1040	302
370	10	4.0	90.0		3929	1270	
420	15	3.1	60.0		4498	1270	
390	20	2.3	45.0		4951	1270	
370	25	1.8	36.0		5333	1270	
460	30	1.9	30.0		5667	1270	
410	40	1.4	22.5		6238	1270	
390	50	1.1	18.0		6719	1270	
350	60	0.86	15.0		7140	1270	
315	80	0.63	11.3		7859	1270	
280	100	0.49	9.0		8180	1270	
565	7.5	8.0	120.0	NRV105	4511	1390	302
620	10	6.6	90.0		4965	1700	
660	15	4.9	60.0		5684	1700	
630	20	3.6	45.0		6256	1700	
660	25	3.1	36.0		6739	1700	
730	30	3.0	30.0		7161	1700	
690	40	2.2	22.5		7882	1700	
680	50	1.8	18.0		8491	1700	
620	60	1.4	15.0		9023	1700	
540	80	1.0	11.3		9931	1700	
490	100	0.80	9.0		10320	1700	
650	7.5	9.2	120.0	NRV110	4511	1390	302
713	10	7.6	90.0		4965	1700	
759	15	5.6	60.0		5684	1700	
725	20	4.1	45.0		6256	1700	
759	25	3.5	36.0		6739	1700	
840	30	3.5	30.0		7161	1700	
794	40	2.5	22.5		7882	1700	
748	50	2.0	18.0		8491	1700	
682	60	1.6	15.0		9023	1700	
567	80	1.1	11.3		9931	1700	
515	100	0.84	9.0		10320	1700	
880	7.5	12.3	120.0	NRV130	5901	1740	302
960	10	10.3	90.0		6494	2100	
1060	15	7.8	60.0		7434	2100	
1040	20	5.8	45.0		8182	2100	
1050	25	4.8	36.0		8814	2100	
1170	30	4.7	30.0		9366	2100	
1100	40	3.5	22.5		10309	2100	
1050	50	2.7	18.0		11105	2100	
940	60	2.1	15.0		11801	2100	
860	80	1.6	11.3		12989	2100	
780	100	1.2	9.0		13500	2100	
1400	7.5	19.5	120.0	NRV150	8067	2270	302
1480	10	15.7	90.0		8878	2700	
1450	15	10.5	60.0		10163	2645	
1500	20	8.4	45.0		11186	2800	
1380	25	6.3	36.0		12050	2800	
1400	30	5.4	30.0		12805	2800	
1800	40	5.7	22.5		14094	2800	
1600	50	4.1	18.0		15182	2800	
1440	60	3.2	15.0		16133	2800	
1300	80	2.4	11.3		17757	2800	
1150	100	1.8	9.0		18000	2800	



NRV Performance 性能参数

(n1=500)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
24	5	0.30	100.0	NRV030	841	210	302
24	7.5	0.21	66.7		963	210	
24	10	0.16	50.0		1060	210	
24	15	0.12	33.3		1213	210	
23	20	0.09	25.0		1336	210	
29	25	0.10	20.0		1439	210	
26	30	0.08	16.7		1529	210	
23	40	0.06	12.5		1683	210	
21	50	0.05	10.0		1813	210	
19	60	0.04	8.3		1830	210	
17	80	0.03	6.3		1830	210	
49	5	0.60	100.0	NRV040	1619	350	302
54	7.5	0.45	66.7		1853	350	
54	10	0.35	50.0		2040	350	
55	15	0.26	33.3		2335	350	
52	20	0.19	25.0		2570	350	
49	25	0.15	20.0		2769	350	
58	30	0.16	16.7		2942	350	
53	40	0.12	12.5		3238	350	
49	50	0.10	10.0		3488	350	
46	60	0.08	8.3		3490	350	
40	80	0.06	6.3		3490	350	
36	100	0.05	5.0	3490	350		
92	5	1.1	100.0	NRV050	2222	490	302
103	7.5	0.86	66.7		2544	490	
103	10	0.67	50.0		2800	490	
103	15	0.47	33.3		3205	490	
93	20	0.33	25.0		3528	490	
91	25	0.28	20.0		3800	490	
108	30	0.29	16.7		4038	490	
98	40	0.22	12.5		4445	490	
91	50	0.17	10.0		4788	490	
83	60	0.14	8.3		4840	490	
75	80	0.11	6.3		4840	490	
65	100	0.09	5.0	4840	490		
184	7.5	1.5	66.7	NRV063	3325	700	302
185	10	1.2	50.0		3660	700	
187	15	0.85	33.3		4190	700	
178	20	0.63	25.0		4611	700	
164	25	0.48	20.0		4967	700	
200	30	0.54	16.7		5279	700	
185	40	0.40	12.5		5810	700	
173	50	0.32	10.0		6259	700	
160	60	0.26	8.3		6270	700	
137	80	0.19	6.3		6270	700	
128	100	0.16	5.0		6270	700	
260	7.5	2.1	66.7	NRV075	3925	980	302
270	10	1.7	50.0		4320	980	
280	15	1.2	33.3		4945	980	
285	20	0.98	25.0		5443	980	
255	25	0.73	20.0		5863	980	
300	30	0.77	16.7		6231	980	
280	40	0.58	12.5		6858	980	
250	50	0.44	10.0		7380	980	
240	60	0.37	8.3		7380	980	
215	80	0.29	6.3		7380	980	
210	100	0.24	5.0		7380	980	




Performance 性能参数

NRV

(n1=500)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
410	7.5	3.3	66.7	NRV090	4343	1270	302
435	10	2.7	50.0		4780	1270	
490	15	2.1	33.3		5472	1270	
470	20	1.6	25.0		6022	1270	
440	25	1.2	20.0		6487	1270	
550	30	1.4	16.7		6894	1270	
480	40	0.95	12.5		7588	1270	
450	50	0.75	10.0		8174	1270	
400	60	0.59	8.3		8180	1270	
365	80	0.45	6.3		8180	1270	
330	100	0.35	5.0		8180	1270	
690	7.5	5.5	66.7	NRV105	5488	1700	302
740	10	4.6	50.0		6040	1700	
790	15	3.4	33.3		6914	1700	
750	20	2.5	25.0		7610	1700	
790	25	2.1	20.0		8198	1700	
870	30	2.1	16.7		8711	1700	
810	40	1.5	12.5		9588	1700	
800	50	1.3	10.0		10320	1700	
710	60	0.98	8.3		10320	1700	
630	80	0.72	6.3		10320	1700	
570	100	0.56	5.0		10320	1700	
794	7.5	6.4	66.7	NRV110	5488	1700	302
851	10	5.2	50.0		6040	1700	
909	15	3.9	33.3		6914	1700	
863	20	2.8	25.0		7610	1700	
909	25	2.4	20.0		8198	1700	
1000	30	2.4	16.7		8711	1700	
932	40	1.7	12.5		9588	1700	
880	50	1.4	10.0		10320	1700	
781	60	1.1	8.3		10320	1700	
662	80	0.76	6.3		10320	1700	
599	100	0.59	5.0		10320	1700	
1080	7.5	8.6	66.7	NRV130	7178	2100	302
1160	10	7.1	50.0		7900	2100	
1300	15	5.5	33.3		9043	2100	
1230	20	4.0	25.0		9953	2100	
1200	25	3.2	20.0		10722	2100	
1400	30	3.3	16.7		11394	2100	
1300	40	2.4	12.5		12540	2100	
1220	50	1.9	10.0		13500	2100	
1070	60	1.5	8.3		13500	2100	
970	80	1.1	6.3		13500	2100	
860	100	0.85	5.0		13500	2100	
1700	7.5	13.5	66.7	NRV150	9812	2800	302
1780	10	10.7	50.0		10800	2800	
1730	15	7.2	33.3		12363	2800	
1820	20	5.9	25.0		13607	2800	
1630	25	4.3	20.0		14658	2800	
1670	30	3.8	16.7		15576	2800	
2120	40	3.9	12.5		17144	2800	
1870	50	2.9	10.0		18000	2800	
1680	60	2.3	8.3		18000	2800	
1530	80	1.7	6.3		18000	2800	
1350	100	1.3	5.0		18000	2800	



NRV Performance 性能参数

NRV/NMRV (n1=1400)


M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)	
73	300	0.08	4.7	NRV030/040	3490	210	302
65	400	0.06	3.5		3490	210	
61	500	0.04	2.8		3490	210	
73	600	0.04	2.3		3490	210	
73	750	0.04	1.9		3490	210	
73	900	0.03	1.6		3490	210	
65	1200	0.02	1.2		3490	210	
73	1500	0.02	0.9		3490	210	
73	1800	0.02	0.8		3490	210	
65	2400	0.01	0.58		3490	210	
65	3200	0.01	0.4		3490	210	
33	4000	0.01	0.4		3490	210	
29	5000	0.01	0.28		3490	210	
145	300	0.15	4.7	NRV030/050	4840	210	302
124	400	0.10	3.5		4840	210	
120	500	0.09	2.8		4840	210	
145	600	0.08	2.3		4840	210	
145	750	0.07	1.9		4840	210	
145	900	0.06	1.6		4840	210	
124	1200	0.04	1.2		4840	210	
145	1500	0.04	0.93		4840	210	
145	1800	0.04	0.78		4840	210	
124	2400	0.03	0.6		4840	210	
120	3000	0.02	0.5		4840	210	
82	4000	0.02	0.35		4840	210	
82	4800	0.02	0.29		4840	210	
230	300	0.24	4.7	NRV030/063	6270	210	302
230	400	0.19	3.5		6270	210	
216	500	0.15	2.8		6270	210	
230	600	0.13	2.3		6270	210	
216	750	0.11	1.9		6270	210	
198	900	0.09	1.6		6270	210	
230	1200	0.08	1.2		6270	210	
216	1500	0.06	0.93		6270	210	
198	1800	0.05	0.78		6270	210	
230	2400	0.05	0.58		6270	210	
216	3000	0.04	0.47		6270	210	
172	4000	0.03	0.35		6270	210	
150	5000	0.02	0.28		6270	210	
390	300	0.36	4.7	NRV040/075	7380	350	302
360	400	0.27	3.5		7380	350	
320	500	0.21	2.8		7380	350	
390	600	0.19	2.3		7380	350	
390	750	0.16	1.9		7380	350	
390	900	0.14	1.6		7380	350	
360	1200	0.11	1.2		7380	350	
390	1500	0.10	0.93		7380	350	
390	1800	0.09	0.78		7380	350	
360	2400	0.07	0.58		7380	350	
320	3000	0.05	0.47		7380	350	
250	4000	0.04	0.35		7380	350	
230	5000	0.03	0.28		7380	350	
610	300	0.56	4.7	NRV040/090	8180	350	302
610	400	0.43	3.5		8180	350	
560	500	0.34	2.8		8180	350	
610	600	0.30	2.3		8180	350	
560	750	0.23	1.9		8180	350	
505	900	0.19	1.6		8180	350	
610	1200	0.17	1.2		8180	350	
560	1500	0.14	0.93		8180	350	



Performance 性能参数

NRV

NRV/NMRV (n1=1400)

M2 (Nm)	i	P1 (kW)	n2 (1/min)	型 号	Fr2 (N)	Fr1 (N)			
505	1800	0.11	0.78	NRV040/090	8180	350	302		
610	2400	0.11	0.58		8180	350			
560	3000	0.08	0.47		8180	350			
460	4000	0.08	0.35		8180	350			
410	5000	0.06	0.28		8180	350			
1100	300	0.95	4.7	NRV050/105	10320	490	302		
1030	400	0.69	3.5		10320	490			
1000	500	0.56	2.8		10320	490			
1030	600	0.48	2.3		10320	490			
1100	750	0.43	1.9		10320	490			
1100	900	0.38	1.6		10320	490			
1030	1200	0.27	1.2		10320	490			
1100	1500	0.26	0.93		10320	490			
1100	1800	0.23	0.78		10320	490			
1030	2400	0.17	0.58		10320	490			
1000	3000	0.14	0.47		10320	490			
780	4000	0.12	0.35		10320	490			
710	5000	0.09	0.28		10320	490			
1265	300	1.1	4.7		NRV050/110	10320		490	302
1185	400	0.79	3.5			10320		490	
1100	500	0.61	2.8	10320		490			
1185	600	0.55	2.3	10320		490			
1265	750	0.49	1.9	10320		490			
1265	900	0.43	1.6	10320		490			
1185	1200	0.31	1.2	10320		490			
1265	1500	0.30	0.93	10320		490			
1265	1800	0.26	0.78	10320		490			
1185	2400	0.19	0.58	10320		490			
1100	3000	0.15	0.47	10320		490			
819	4000	0.13	0.35	10320		490			
746	5000	0.10	0.28	10320		490			
1760	300	1.5	4.7	NRV063/130		13500	700	302	
1650	400	1.1	3.5			13500	700		
1550	500	0.86	2.8		13500	700			
1650	600	0.76	2.3		13500	700			
1760	750	0.66	1.9		13500	700			
1760	900	0.58	1.6		13500	700			
1650	1200	0.43	1.2		13500	700			
1760	1500	0.39	0.93		13500	700			
1760	1800	0.35	0.78		13500	700			
1650	2400	0.25	0.58		13500	700			
1550	3000	0.20	0.47		13500	700			
1220	4000	0.15	0.35		13500	700			
1100	5000	0.11	0.28		13500	700			
2340	150	3.4	9.3		NRV063/150	18000	700		302
2340	200	2.7	7.0			18000	700		
2050	250	1.9	5.6	18000		700			
2340	300	1.9	4.7	18000		700			
2670	400	1.8	3.5	18000		700			
2330	500	1.4	2.8	18000		700			
2670	600	1.3	2.3	18000		700			
2330	750	0.98	1.9	18000		700			
2100	900	0.71	1.6	18000		700			
2670	1200	0.75	1.2	18000		700			
2100	1800	0.44	0.8	18000		700			
2670	2400	0.46	0.6	18000		700			
2330	3000	0.34	0.5	18000		700			
1880	4000	0.23	0.4	18000		700			
1650	5000	0.18	0.3	18000		700			