



Mini Hermet Temperature Transmitter- Explosion Proof, Adjustable

Form 558

The Series 534MT Mini Hermet Temperature

Transmitter is a loop powered (5 to 30 VDC) 3-wire RTD input and 4-20 mA or 1-5 VDC output field mounted instrument. Exterior construction is hermetically sealed 316SS.

The Series 534MT Mini Hermet Temperature Transmitter can be locally ranged in service while maintaining its explosion proof integrity which differentiates it from non-serviceable instruments. Its performance is comparable to full-size conventional transmitters.

Applications

Hermetically sealed 316SS exterior construction makes the 534MT Temperature Transmitter suitable for hazardous locations and hostile environments where space is limited. When the RTD is enclosed in a 316SS or 347SS thermowell, the temperature of a wide variety of process fluids can be sensed. The 534MT Temperature Transmitter meets offshore and onshore specifications for the petrochemical industry and other industrial process applications.




Dimensions

Dimensions are for reference only and subject to change without notice. Contact the factory for certified drawings. All dimensions are expressed as millimeters over inches. (Linear = mm/in.)

Features and Benefits

- Compact, hermetically sealed 316SS housing
- Ranges available from -328 to 1000°F (-200 to 538°C)
- Magnetically coupled, zero and span adjustments permit in-service calibration without declassification of hazardous area
- Accuracy = 0.1% URL
- Explosion proof and intrinsically safe design
- Weathertight - NEMA 4X
- Serialized with 3 year Warranty
- Mounting: Thermowell, electrical conduit, pipe stanchion, or bulkhead
- Wetted parts meet NACE specifications

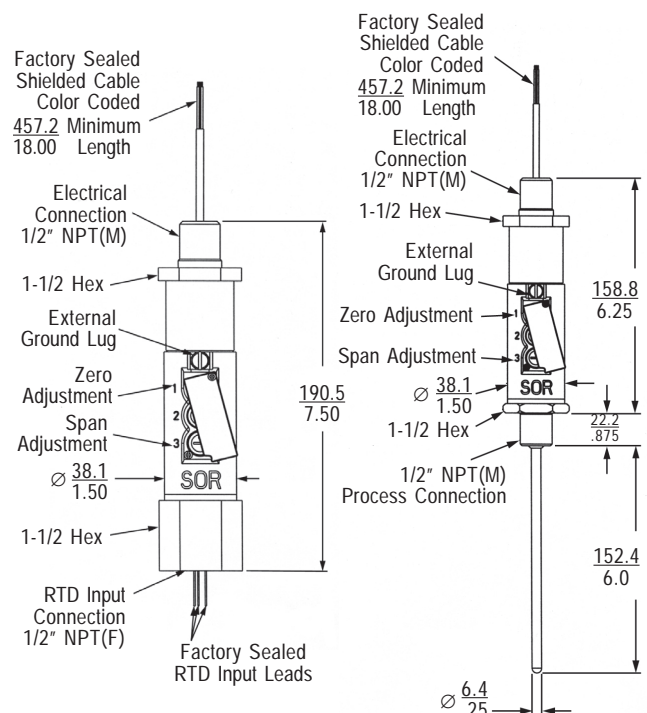

Product Specifications

Accuracy (L, H, and R)	±0.3% URL
Linearity	±0.2% URL
Turndown	5:1
Zero Offset	±20% URL
Temperature Range	
Ambient	-40 to 160°F (-40 to 71°C)
Storage	-40 to 185°F (-40 to 85°C)
Temperature Effects	±1.0% URL Total Error Band
Supply Voltage	9 to 30 VDC
Output	4 to 20mA (1 to 5 VDC optional), loop powered
Loop Resistance	750 Ω 24 VDC
Circuit Protection	Reverse polarity, EMI/RFI
Construction	316SS housing (CF8M)
Environment Protection	NEMA 4X, IP66

RTD Connection	
Remote Mount	1/2" NPT(F), 3166; 18-inch, 24 AWG leads (optional junction box with screw terminals)
Direct Mount	1/2" NPT(M), 316 SS; 6 -inch insertion length (standard); 2000 psi (138 bar) maximum working pressure
Electrical Connection	
Size	1/2" NPT(M)
Termination	18 inch, 24 AWG leads (optional junction box with screw terminals)
Shipping Weight	3 lbs (1.5 kg)
Warranty	3 year

Design and specifications are subject to change without notice.

Agency Listings

Junction Box (Only)

FM and CSA

Explosion Proof

Class I, Groups A, B, C, D; Class II,
Groups E, F, G; Class III; Division 1 and 2

CENELEC

Flameproof

EEx d IIC

Weathertight

NEMA 4X, Type 4X, IP66



Ordering Information

Select an adjustable range designator ① from the transmitter range selection table and insert it in the appropriate model number.

Model Number	Output	Mounting
534MT - TN ① - P9 - C2A	4 - 20 mA	Remote
534MT - TN 15 - P9 - C7A		Direct
534MT - VN ① - P9 - C2A - TL	1 - 5 VDC	Remote
534MT - VN 15 - P9 - C7A - TL		Direct

Mini Hermet Temperature Transmitter

Transmitter Range Selection

Remote Mount

Designator ①	Adjustable Range		Maximum Process Temperature	
	°F	°C	°F	°C
1	-328 to 0	-200 to -18	450	232
15	-50 to 150	-46 to 66		
41	0 to 400	-18 to 204		
71	0 to 700	-18 to 371	1200	649
111	0 to 1000	-18 to 538		

Contact factory for other ranges.

Direct Mount

Designator	Adjustable Range		Maximum Process Temperature	
	°F	°C	°F	°C
15	-50 to 150	-46 to 66	200	93

Six-inch insertion length is normally available from stock. Optional insertion lengths are designated with an X at the end of the model number. Consult the factory for availability and lead times

Remote Sensor

A factory-supplied RTD can be ordered as a separate line item by using its part number. The part number is not part of the transmitter model number.

Part Number	RTD Temperature Range		Cable Length
	°F	°C	Feet
8924 - 103	-150 to 400	-101 to 204	10
8924 - 104	-150 to 1000	-101 to 538	10
8924 - 114	-150 to 400	-101 to 204	15
8924 - 115	-150 to 1000	-101 to 538	15
8924 - 116	-150 to 400	-101 to 204	20
8924 - 117	-150 to 1000	-101 to 538	20

Notes

1. Part number 8924-103 is stocked for normal delivery. Longer lead times can be expected with other part numbers.
2. RTD leads are teflon insulated with PVC coated, flexible stainless steel armor. 1/2" NPT(M) cable gland fitting included.
3. RTD sensor wetted material: 1/4" O.D. 316SS sheathed sensor, 1/2" NPT(M) brass compression fitting.
4. RTD insertion length 12 inches.
5. Three-wire RTD's, .00385 temperature coefficient of resistance.

Accessories

Add accessory designator(s) to the end of the model number.

Accessory / Option Description	Designator
Cleaned for industrial oxygen service	BB
Pipe Kit	PK
Fiber tag attached to housing	PP
Stainless steel tag wired to housing	RR
Stainless steel terminal box with terminal block (on electrical connection end)	TL
Stainless steel terminal box with RTD terminal strip (on sensor end)	TM
Stainless steel oversize nameplate	TT
Fungicidal varnish	VV
Epoxy coating	YY



Process Instrumentation

SOR INC.

14685 West 105th Street
Lenexa, Kansas 66215

Phone 913-888-2630
Toll Free 800-676-6794
Fax 913-888-0767

www.sorinc.com

Registered Quality System to ISO 9001

Form 558 (04.02) Printed in U.S.A.