



Self-Venting/Non-Venting

maximum 3500 PSIG in / 25 - 600 PSIG out
spring loaded / hand operated / piston sensed
pressure reducing

44-5200 Series

Specifications

Operating Parameters

pressure rating per criteria of ANSI/ASME B31.3
 maximum rated inlet pressure . . . 400 and 3500 PSIG
 outlet pressure range 25, 50, 100, 250,
 500 and 600 PSIG
 design proof pressure 150% of maximum
 rated pressure
 operating temperature¹ -15° F to +200° F
 (-26° C to +93° C)
 flow capacity C_v = .06 and .15
 maximum operating torque 30 lbs.-in. (3.4 Nm)

¹ For extended temperatures from -40°F to +400°F, consult TESCO.

Media Contact Materials

body 316 Stainless Steel or brass
 bonnet 300 Series Stainless Steel or brass
 piston 316 Stainless Steel or brass
 seats Vespel®
 o-ring Viton®
 filter (40 micron) 316 Stainless Steel
 remaining parts 300 Series Stainless Steel
 and brass

For other materials and modifications, please consult TESCO.

Cleaning CGA 4.1 and ASTM G93

Connections 1/4" NPT inlet,
outlet and gauge ports

Weight (without gauges) 2 lbs. (.91 kg)

Pressure Conversion 14.5 PSIG = 1 bar 145 PSIG = 1 MPa


Viton® and Vespel® are registered trademarks of DuPont.





Advantages

- Compact and economical
- For gas or liquid service
- Piston sensed for high reliability and long service life
- Standard version includes 1/4" NPT gauge ports
- Brass or Stainless Steel construction
- Adjustable stop limits maximum outlet pressure
- 6000 PSIG inlet available
- Self venting and captured self venting available

44-5200 Series Self-Venting/Non-Venting

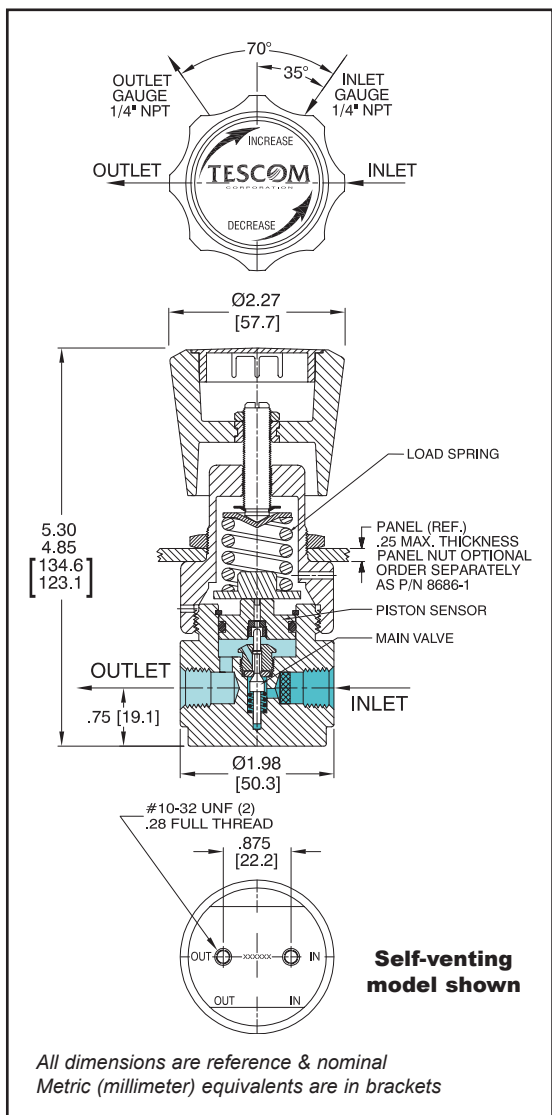

Flow Charts

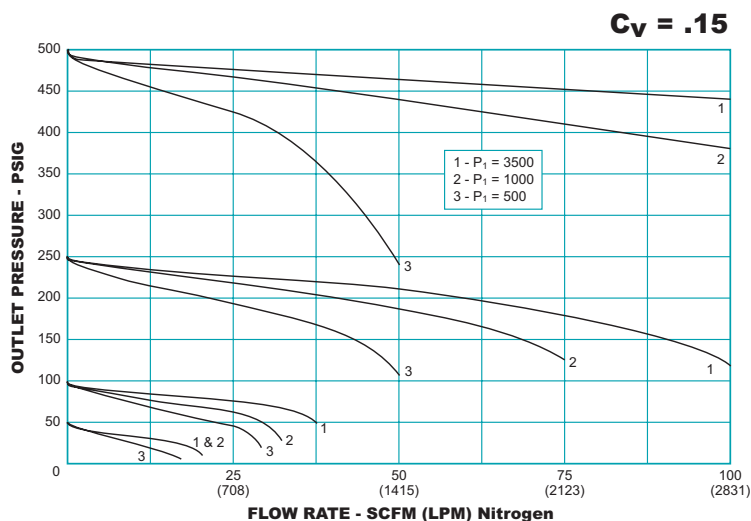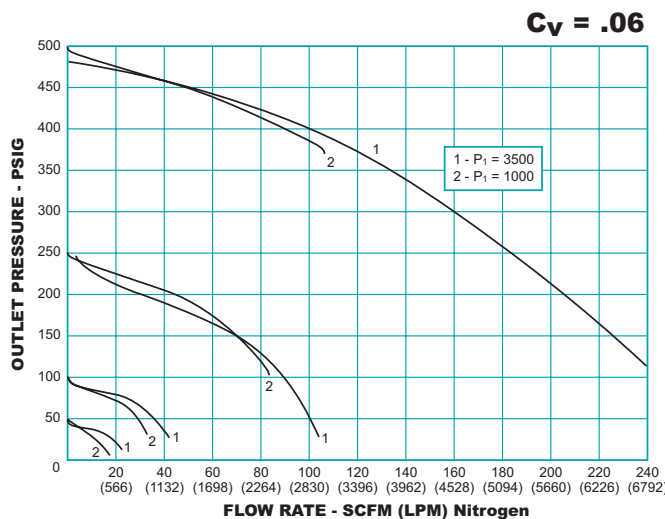

Part Number Selector

example part number:

44-52 1 5 - 2 4 3 V - SEE NUMBER BELOW

BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE	INLET & OUTLET PORT TYPE	PORT SIZE	INLET PRESSURE	FLOW CAPACITY	OPTIONAL SELF-VENTING	MODS
44-52	1 - Brass 6 - 316 Stainless Steel	0 - 1-25 PSIG 1 - 1-50 PSIG 2 - 2-100 PSIG 3 - 2-250 PSIG 5 - 5-500 PSIG 6 - 5-600 PSIG	2 - NPT	4 - 1/4"	1 - 3500 PSIG 2 - 400 PSIG 3 - 3500 PSIG	$C_v = .06$ $C_v = .15$ $C_v = .15$	V - Self-venting	- 038 - Dome loaded - VA027 - Air loaded, self-venting

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the TESCOM Safety, Installation & Operation Precautions.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice.

For information contact:

TESCOM

TESCOM Industrial Controls

Tel: 800-447-1250 • 763-241-3238

Fax: 763-241-3224 • email: ic@tescom.com

12616 Industrial Boulevard • Elk River, MN 55330 USA

www.TESCOM.com

©Tescom Corporation, 2007; All Rights Reserved.

Tescom is a business unit of the Regulator Division.

Trademarks are property of divisions of Emerson Process Management.

Form No. 1866 Rev. 5/07 Printed 5/07 5M Printed in the U.S.A.

EMERSON
Process Management