

# CRYSTAL OSCILLATOR

## CMO5032T SERIES



### Features

- External dimensions:5.0×3.2×1.2mm
- Standard Frequency:32.768kHz
- Excellent frequency stability over wide temperature range realized by third-order temperature characteristics specific to AT-cut crystal
- Reflow soldering
- Rohs compliant/Pb Free.

### Specifications

Item/Type	CMO5032T
Output Type	CMOS
Standard Frequency	32.768KHz
Vibration Mode	AT Fundamental
Load Capacitance	15pF
Supply Voltage	1.8V to 3.3V
Frequency Tolerance(at 25℃)	±10ppm, ±30ppm
Operating Temperature	-40~+85℃,or specify
Storage Temperature	-55~+125℃,or specify
Rise(Tr)/Fall (Tf) Time	130nS Max.
Supply Current	90uA Max.
Symmetry	45~55%
Start-up Time	10 mS Max.
Frequency Aging (at 25 ℃)	±3ppm/year Max.


# CRYSTAL OSCILLATOR

## CMO5032T SERIES



### Dimensions

(Unit:mm)

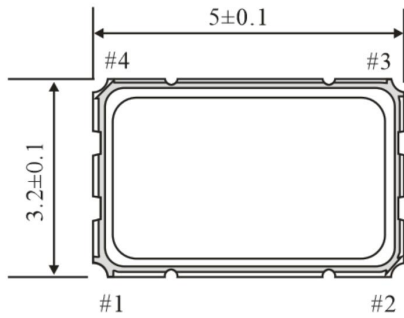

PIN	FUNCTION
1	T/S
2	GND
3	OUT
4	VDD

T/S: Tri-state, PIN 1 connected to VDD or floating, the product is working properly; connected to GND, stops working

