


QUARTZ CRYSTAL UNITS

CRS306TG

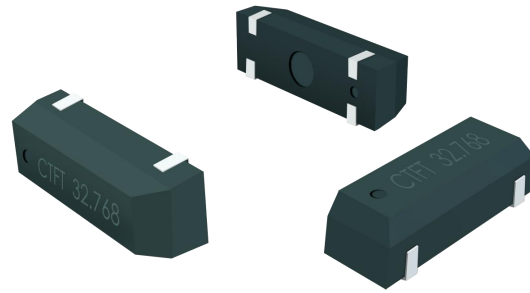

Features

- External dimensions: 8.0×3.6×2.5mm.
- Standard Frequency: 32.768KHz
- Higher frequency pullability and lower equivalent series resistance
- Lower cost and delivery quickly .Best choice for Notebook、 Cable Modem
- RoHS compliant/pb Free

Specifications

Item/Type	CRS306TG
Standard Frequency	32.768KHz
Load Capacitance	7pF,9pF ,12.5pF or specify
Frequency Tolerance(at 25℃)	±20ppm, or specify
Frequency Versus Temperature	±20ppm,or specify
Operating Temperature	-40~+85℃,or specify
Storage Temperature	-55~+125℃,or specify
Shunt Capacitance	2pF Max.
Temperature Coefficient	(-0.036+/-0.005)ppm/℃ ²
Level Of Drive	1.0 μW typical
Frequency Aging (at 25 ℃)	±5ppm/year Max.
Equivalent Series Resistance(ESR)	
Fundamental	
32.768KHz	50KΩ Max.

QUARTZ CRYSTAL UNITS

CRS306TG



Dimensions

(Unit:mm)

