


D 型液体搅拌机

螺旋齿轮传动组合，低噪音。全密闭式机架，防尘、防水，标准化规格，轻便实用型。

Composed of helical gear for driving, this type makes low noise. Tightly closed frame makes it water-proof and dust-proof. With standardized model, it is portable and handy.

尺寸表 Dimension Table

型号	转速 RPM		使用马达	Dimension:mm											图样	
	60Hz	50Hz		A	B	J	E	F	f	G	Z	D	S	L	Pic	
D-020	1720	1450	1/4HP-4P	225	235	0	170	210	40	14	13	100	19	650	A	
	430	360	1/4HP-4P	225	224	65	170	210	40	14	13	230	19	800	B	
	330	280	1/4HP-4P	225	224	65	170	210	40	14	13	230	19	800	B	
	220	175	1/4HP-4P	225	238	20	170	210	40	14	13	260	19	800	C	
	100	85	1/4HP-4P	225	238	20	170	210	40	14	13	260	19	800	C	
D-050	1720	1450	1/2HP-4P	248	235	0	170	210	40	14	13	120	19	650	A	
	1120	1000	1/4HP-6P	248	235	0	170	210	40	14	13	120	19	700	A	
	430	360	1/2HP-4P	248	224	65	170	210	40	14	13	230	19	1000	B	
	330	280	1/2HP-4P	248	224	65	170	210	40	14	13	230	19	1000	B	
	200	175	1/2HP-4P	248	238	20	170	210	40	14	13	260	19	1000	B	
	100	85	1/2HP-4P	248	238	20	170	210	40	14	13	260	19	1000	C	
D-100	1720	1450	1HP-4P	242	328	0	220	250	45	17	15	150	22	700	A	
	1120	1000	1/2HP-6P	242	328	0	220	250	45	17	15	150	22	800	A	
	510	430	1HP-4P	242	302	98	220	250	45	17	15	330	22	1200	B	
	360	300	1HP-4P	242	302	98	220	250	45	17	15	330	22	1200	B	
	290	250	1HP-4P	242	302	98	220	250	45	17	15	330	22	1200	C	
	240	200	1HP-4P	242	317	38	220	250	45	17	15	360	22	1200	C	
	190	160	1HP-4P	242	317	38	220	250	45	17	15	360	22	1200	C	
	140	120	1HP-4P	242	317	38	220	250	45	17	15	360	22	1200	C	
	115	100	1HP-4P	242	317	38	220	250	45	17	15	360	22	1200	C	
	90	80	1HP-4P	242	317	38	220	250	45	17	15	360	22	1200	C	
D-200	1720	1450	2HP-4P	322	328	0	220	250	45	17	15	150	25	800	A	
	1120	1000	1HP-6P	322	328	0	220	250	45	17	15	200	25	900	A	
	510	430	2HP-4P	322	302	98	220	250	45	17	15	330	25	1400	B	
	360	300	2HP-4P	322	302	98	220	250	45	17	15	330	25	1400	B	
	240	200	2HP-4P	322	317	38	220	250	45	17	15	360	25	1400	C	
	140	120	2HP-4P	322	317	38	220	250	45	17	15	360	25	1400	C	
	115	100	2HP-4P	322	317	38	220	250	45	17	15	360	25	1400	C	

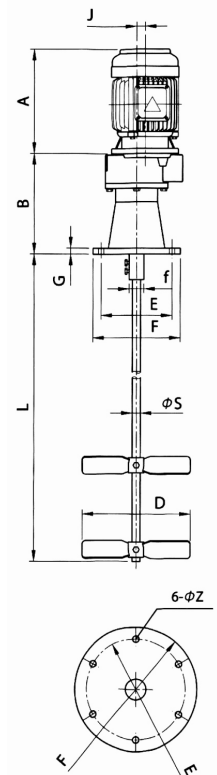

- 1.随机所付之叶片为双翼平桨两层，或三翼螺旋桨一层，表面酸洗处理。
- 2.接液部份之棒叶材质为 SUS304 其他特殊材质或包涂装，请另行洽询。