



REVISIONS				
REV	DATE	DESCRIPTION	BY	APP.BY
△				
△				
△				

DRAWING NO. SA 901152 △

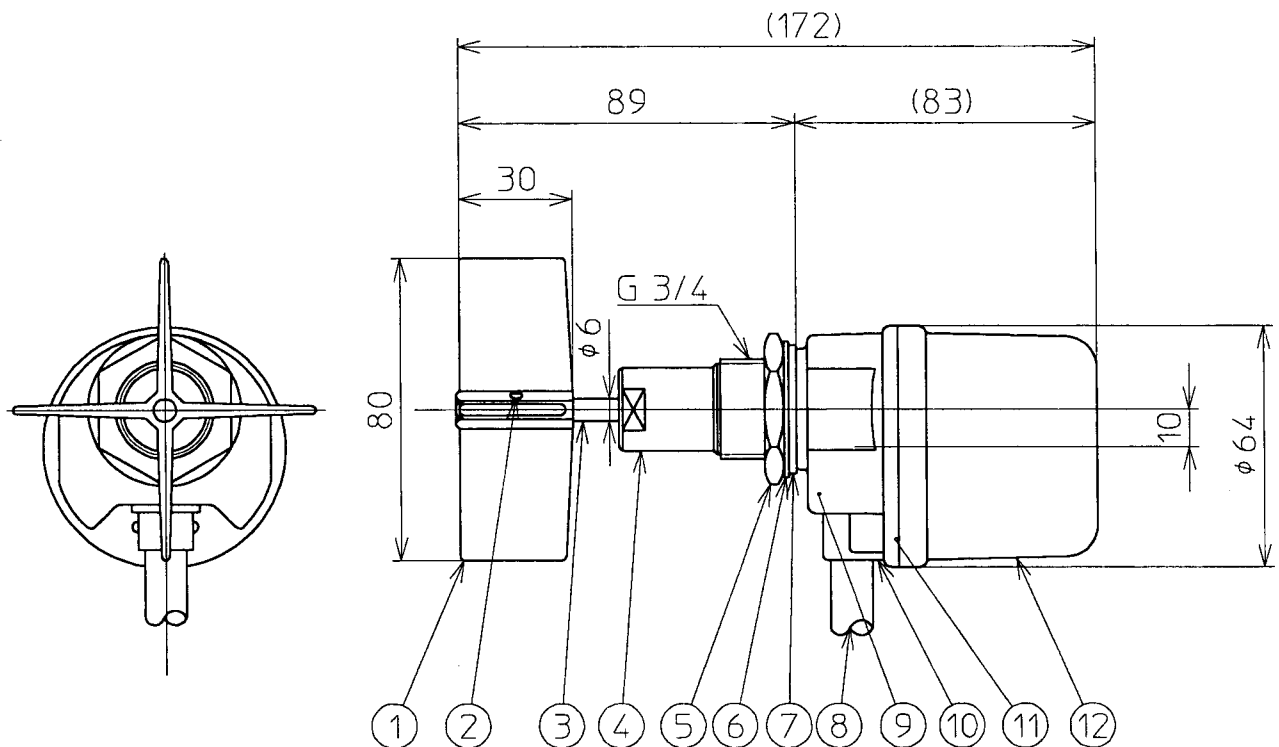

Electric Rated

Power Supply	V AC 50/60Hz
Contact Capacity	250V 3A AC (Resistance load) 30V 4A DC (Resistance load)
Rotational Frequency	1 r.p.m. ($1.65 \times 10^{-2} S^{-1}$) (50Hz) 1.2 r.p.m. ($2.0 \times 10^{-2} S^{-1}$) (60Hz)

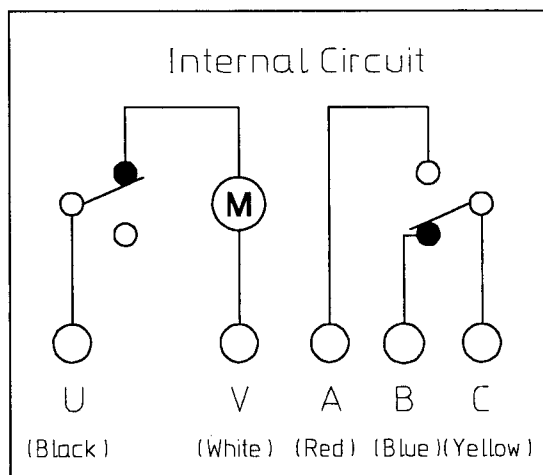

12	Cover	1	Polycarbonate
11	Set Plate	1	Polycarbonate
10	Cable Bush	1	Polycarbonate
9	Housing	1	Aluminum Alloys Die Castings
8	Cable	0.3m	VCT 5x0.5mm ²
7	Gasket	1	Acrylonitrile Butadiene Rubber
6	Washer	1	Brass(Nickel Plating)
5	Fiting Nut	1	Brass(Nickel Plating)
4	Cap	1	Brass(Nickel Plating)
3	Spindle	1	304 Stainless Steel
2	Split Pin	1	304 Stainless Steel
1	Paddle	1	Polycarbonate
P.No.	Name	Qty.	Material

DATE 07-29- '99	DR.BY <i>[Signature]</i>
SCALE N.T.S.	CH.BY <i>[Signature]</i>
UNITS MILLIMETERS	APP.BY <i>[Signature]</i>
NOHKEN INC. OSAKA, JAPAN	

TITLE OUTLINE DRAWINGT OF ROTATING-PADDLE LEVEL SENSOR	
MODEL R7-X	REFERENCE
DRAWING NO. SA 901152 △	