


磁性水流开关 Magnetic Flow Switches

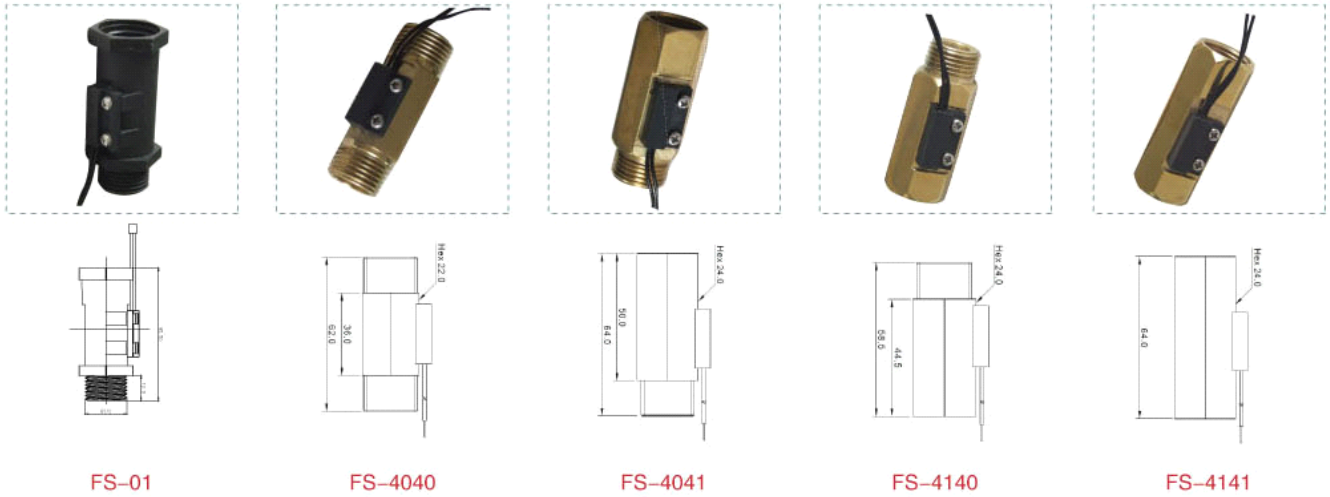

型号 Type	FS-01	FS-2020	FS-2021	FS-2120	FS-2121
		FS-4040	FS-4041	FS-4140	FS-4141
		FS-6060	FS-6061	FS-6160	FS-6161
壳体材料 housing material	ABS	铜/不锈钢 Copper/SUS304			
安装方式 Installation Mode	垂直安装 Vertical Installed	V: 垂直安装 Vertical Installed only C: 可以水平或者垂直安装 Horizontal and Vertical Optional			
入水口螺纹接口 Inlet Thread	外螺纹 Outer	外螺纹 Outer	外螺纹 Outer	内螺纹 Inner	内螺纹 Inner
入水口连接螺纹 Inlet Screw Thread	M20	2: G1/4 BSP 4: G1/2 BSP 6: G3/4BSP			
出水口螺纹接口 Outlet Thread	内螺纹 Inner	外螺纹 Outer	内螺纹 Inner	外螺纹 Outer	内螺纹 Inner
出水口连接螺纹 Outlet Screw Thread	M20	2: G1/4 BSP 4: G1/2 BSP 6: G3/4BSP			
最小启动流量 Start-up Volume(min)	1.2 L/min	1.2 L/min			
最大工作流量 Operate Volume(max)	10 L/min	12 L/min			
正常工作压力 Standard Operation Pressure	0.05~0.5 MPa	0.005~1.0 MPa			
最大承受压力 Suffering Pressure(max);	1.0 Mpa	1.5 MPa			
触点负载 Contact Rating Max		10W /70W			
最大开关电压 Max. Switching Voltage		200VDC/250VAC			
最小击穿电压 Min. Breakdown Voltage		250VDC/800VDC			
最大开关电流 Max.Switching Current		0.5A/1.0A			
最大负载电流 Max. Carry Current		1.2A/2.25A			
工作温度范围 Operation Temperature	0~+95 °C	0~+100 °C			

*以上技术参数可按客户要求定制 Consult Misensor for Customized Product