




# UZK 型阻旋式料位开关

## UZK ROTATING PADDLE LEVEL SWITCH

### 概述 INTRODUCTION

UZK型阻旋式料位开关适用于各种敞开容器内料位的控制, 仪表采用特殊油封设计, 具有双层防尘, 并有离合器装置保护马达, 工作可靠, 使用维护方便, 广泛用于化工、食品、采矿、塑料、陶瓷等工业行业, 是一种较理想的简易料位控制仪表。

UZK rotating paddle level switch is suitable for control in open vessels. Special oil seal design is used for the instrument, and double-layer dustproof is provided. Moreover, clutch equipment is used to protect motor. Reliable in operation, the products are used widely in the field of chemical, foodstuff, mining, plastic and ceramic industries. Actually in is a quite ideal and simple level control instrument.

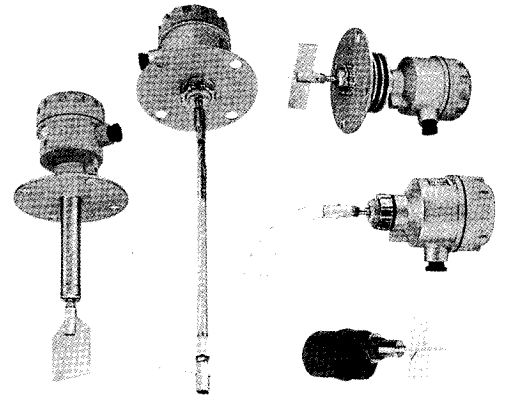


### 型号规格 MODEL AND SPEC


UZK-	阻旋式料位开关 rotation obstructing level switch			
A	100 × 30 (宽 × 高), 80 × 30		叶片形式 veing form	
B	65 × 80			
F	镰刀型 falcform type			
	1	普通型 ordinary type	2 轴保护管型 axis protection tube type	结构形式 structure form
	3	轴长可调型 axis length adjustable type	4 超小型接线盒, 材质: 工程塑料	
		1 螺纹安装 thread mounting G1"		安装形式 mounting form
		2 法兰安装 flange mounting DN80, PN1.0		
	D	隔爆型 explosion-proof type dIIBT4		选项 options
	H	高温型 high temperature type, 过程温度 process temperature: ≤200°C		
	Y	供电电源 power supply 110VAC (220VAC 不填)		

### 主要技术参数 MAIN TECHNICAL PARAMETERS


供电电源 power supply: 220VAC, 110VAC  
 消耗功率 power consumption: 3W  
 接点容量 contact capacity: AC 250V, 5A SPDT  
 转速 rotate speed: 1R.P.M.  
 扭力 torque force: 0.5 ~ 1.0kg cm  
 工作温度 operating temperature:  
 普通型 ordinary type: 60°C;  
 高温型 high temperature type: ≤200°C  
 电气接口 electric connection: M20 × 1.5 内螺纹 inner thread

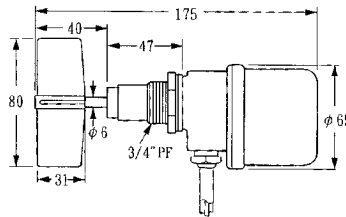

UZK-A41

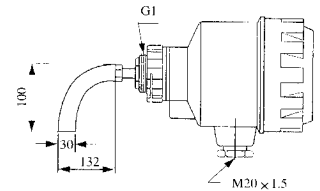


UZK-F11

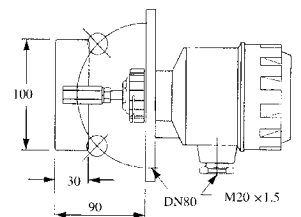


UZK-F12


### 外形尺寸 DIMENSIONS

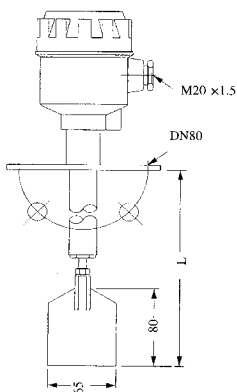


UZK-B22(轴保护管型)  
axis protection tube type

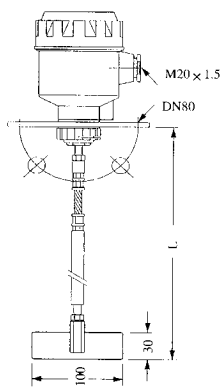

UZK-A32(轴长可调型)  
axis length adjustable type

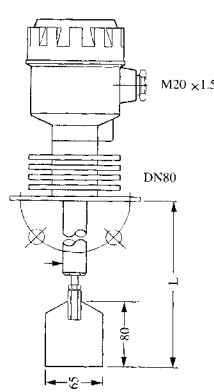

UZK-B22H(轴保护管高温型)  
axis protection tube, high temperature type

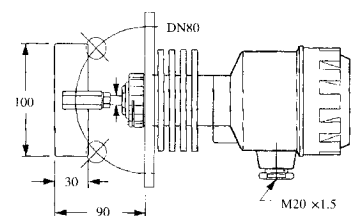

UZK-A12H(高温型)  
high temperature type