



沪制02240183



上海星申仪表有限公司

电话: 021-58308800, 021-58309977

传真: 021-58309955

网址: http://www.xingshen.com


UHZ-517C12E 型磁翻柱液位计

UHZ-517C12E MAGNETIC LIQUID LEVEL GAUGE

适用范围 SUITABLE RANGE

UHZ-517C12E型磁翻柱液位计适用于高温高压场合的液位测量, 最高工作温度为520℃, 最大工作压力为25.0MPa。

UHZ-517C12E magnetic reversing column liquid level gauge is suitable for liquid level measurement in high temperature and high pressure situation. Its highest operating temperature is 520℃, and its maximum operating pressure is 25.0 MPa.

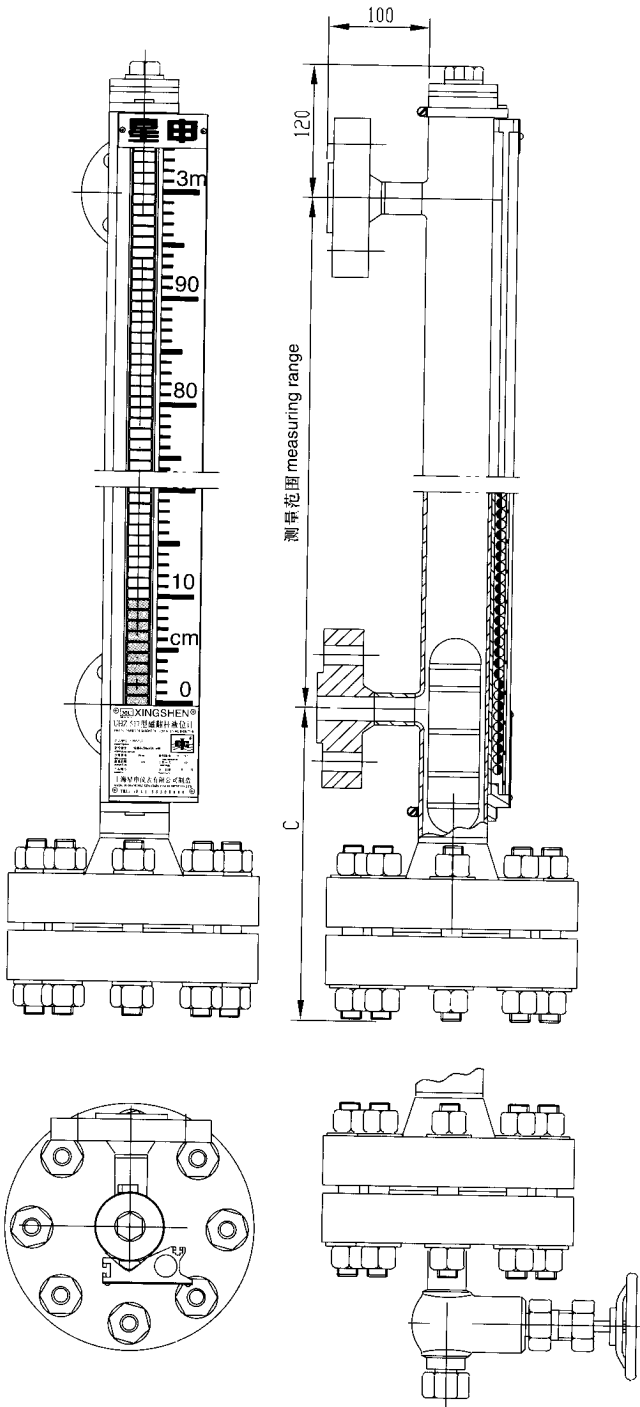

技术参数 SPECIFICATION

测量范围 measuring range:

两个法兰中心之间的距离 center-center distance

最小 min. 150mm 至最大 max. 8000mm

工作压力 operating pressure: 25.0MPa

工作温度 operating temperature: ≤520℃

介质密度 medium density: 0.45~2.0g/cm³

过程连接 process connecting:

旁路侧面安装法兰 side mounting convex flange:

DN25, PN25.0凸面,

法兰标准 flange standard: HG20592~20635-97 其它

法兰标准请用用户注明 Other standard on request.

材质 material:

旁路管 bypass tube: 00Cr17Ni14M2(316L)

浮子 float: 钛 titanium

翻柱 reversing column: 陶瓷 ceramic

可选项 optional item:

UHZ-517C12E	
<input type="checkbox"/> L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch, G、M、N、S、T任选项
<input type="checkbox"/> R	4~20mA 二线制变送器 with two-wire transmitter
<input type="checkbox"/> D	隔爆型 explosion proof type: dIIBT4
<input type="checkbox"/> E	本安型 intrinsically safe type: ibIICT4
<input type="checkbox"/> F	配隔离安全栅 matched with isolating barrier
<input type="checkbox"/> A	XGTH-510(竖式)显示调节报警仪 with display and regulating instrument(upright)
<input type="checkbox"/> B	XGTA-810(横式)显示调节报警仪 with display and regulating instrument(horizontal)
<input type="checkbox"/> J3	真空夹套 with vacuum jacket
<input type="checkbox"/>	测量范围 measuring range(mm)
<input type="checkbox"/>	介质密度 specific gravity of medium(g/cm ³)
<input type="checkbox"/>	工作压力 operating pressure (MPa)