

# UHZ-517T32、UHZ-517T33 磁翻柱液位计

## UHZ-517T32 AND UHZ-517T33 MAGNETIC LIQUID LEVEL GAUGE

### 适用范围 SUITABLE RANGE

UHZ-517T32、T33顶装式磁翻柱液位计主要用于各种地下储罐及侧面不宜开口的容器的液位测量。由于结构上的原因，液位计在测量时存在一定的盲区值N，对于不同介质密度，盲区值也不一样。本厂仪表出厂时，标尺刻度零位已迁移到实际值。

UHZ-517T32 and T33 top-mounted magnetic liquid level gauges are mainly used to measure the level in underground storage tanks and vessels that cannot be opened at side. Some blind area N must exists at measurement due to structure. And for different specific gravity medium, the blind area is different. The product leaves factory with actual value on scale at start.

### 技术参数 SPECIFICATIONS


测量范围 measuring range : 最大max . 4000mm  
 工作压力 operating pressure : 2.5MPa  
 工作温度 operating temperature : -20~200 ℃  
 介质密度 medium density : T32型 : 0.65~2.0g/cm<sup>3</sup>  
 T33型 : 0.5~2.0g/cm<sup>3</sup>

### 过程连接 process connecting :

T32型 : DN100, PN1.0 或PN2.5 凸面convex flange ,  
 T33型 : DN150, PN1.0 或PN2.5 凸面convex flange ,  
 法兰标准flange standard : HG20592~20635-97 其它  
 法兰标准请用用户注明Other standard on request.

材质 material : 顶导管top guide tube : 304或316L  
 浮子float : 钛titanium

可选项 optional item :

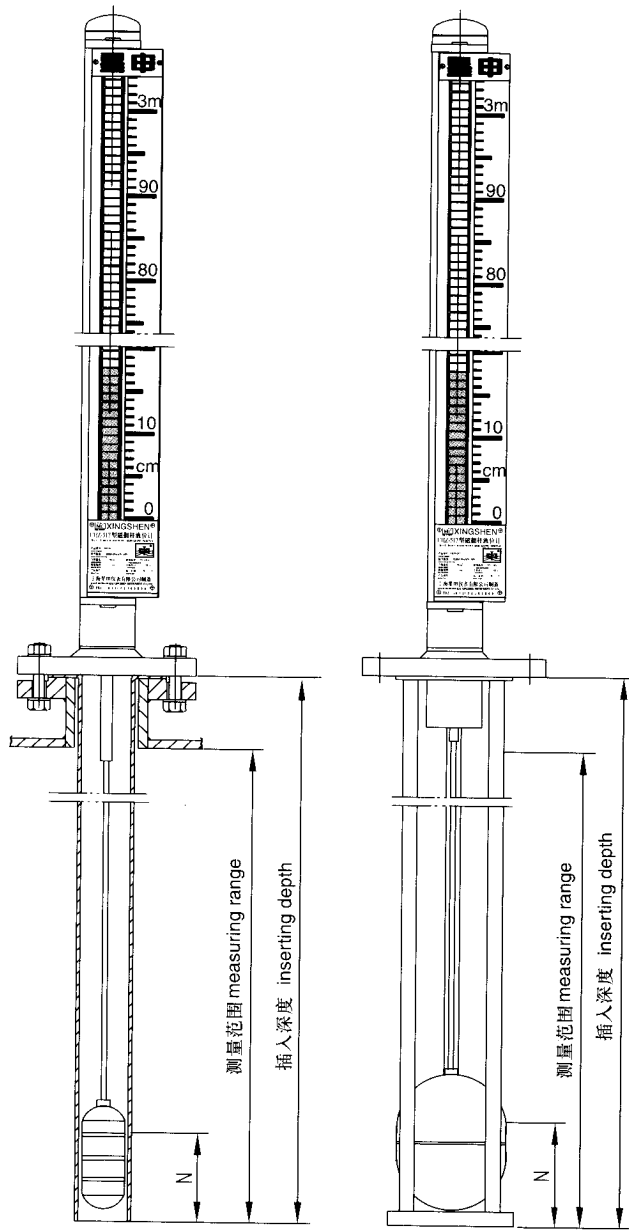

UHZ-517T32 型

UHZ-517T33 型

UHZ-517T32(T33)	
L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch G、M、N、S、T 任选项
R	4~20mA 二线制变送器 with two-wire transmitter
D	隔爆型 explosion proof type: dIIBT4
E	本安型 intrinsically safe type: ibICT4
F	配隔离安全栅 matched with isolating barrier
A	XGTH-510(竖式)显示调节报警仪 with display and regulating instrument(upright)
B	XGTA-810(横式)显示调节报警仪 with display and regulating instrument(horizontal)
J1	蒸汽加热夹套 with steam heating jacket
J2	循环水加热夹套 with cycling water heating jacket
J3	真空夹套 with vacuum jacket
J4	电伴热装置 electrical heating equipment
<input type="checkbox"/>	测量范围 measruing range(mm)
<input type="checkbox"/>	介质密度 specific gravity of medium(g/cm <sup>3</sup> )
<input type="checkbox"/>	工作压力 operating pressure (MPa)

