

UHZ-517T34、UHZ-517T35 防腐型磁翻柱液位计

UHZ-517T34 AND UHZ-517T35 CORROSION-PROOF MAGNETIC LIQUID LEVEL GAUGE


适用范围 SUITABLE RANGE

UHZ-517T34、T35顶装式防腐型磁翻柱液位计主要用于各种地下储罐及侧面不宜开口的容器,且有腐蚀性介质的液位测量。由于结构上的原因,液位计在测量时存在一定的盲区值N,对于不同介质密度,盲区值也不一样。本厂仪表出厂时,标尺刻度零位已迁移到实际值。

UHZ-517T34 and T35 top-mounted magnetic liquid level gauges are mainly used to measure the level in underground storage tanks and vessels that cannot be opened at side. Some blind area N must exist at measurement due to structure. And for different specific gravity medium, the blind area is different. The product leaves factory with actual value on scale at start.

技术参数 SPECIFICATION

	UHZ-517T34型	UHZ-517T35型
测量范围 measuring range	≤6000mm	≤4000mm
工作温度 operating temperature	-20~80℃	-20~200℃
工作压力 operating pressure	1.0MPa	
介质密度 medium density	0.65~2.0g/cm ³	
过程连接 process connecting	DN100 PN1.0 凸面法兰Convex flange. 法兰标准flange standard: HG20592~20635-97 其它法兰标准请用户注明 Other standard on request.	
材质 material	顶导管 浮子 float	304内衬PP PP
		304内衬PTFE PTFE

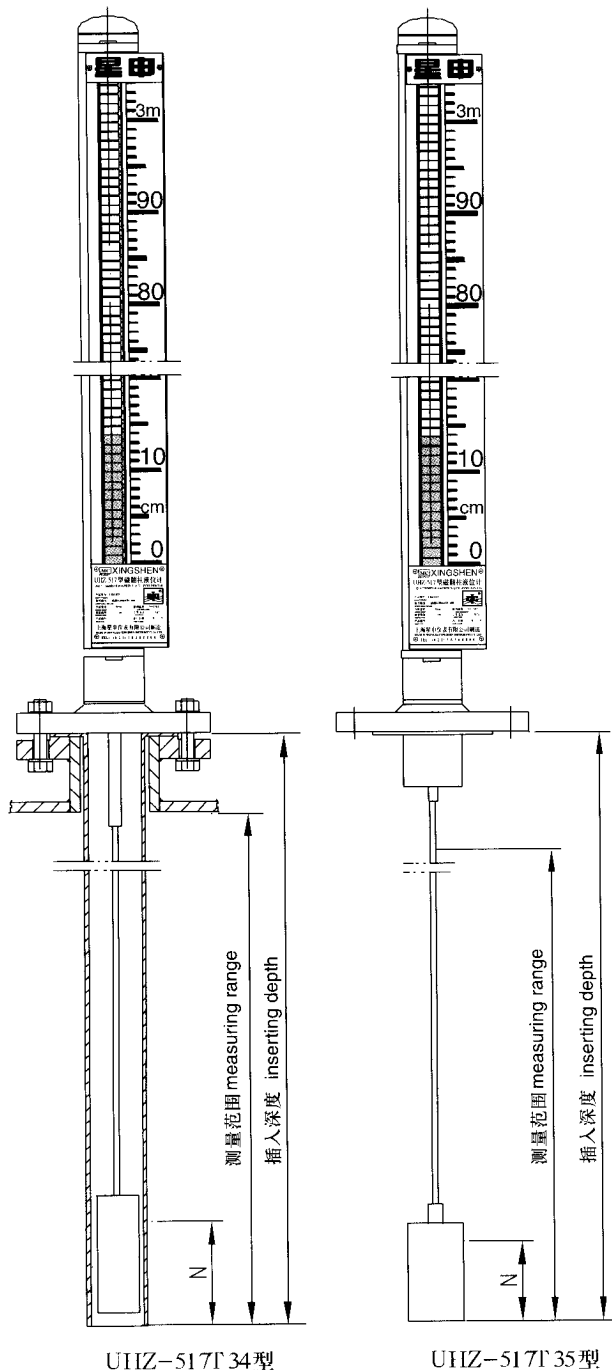

UHZ-517T34型

UHZ-517T35型

可选项 optional item:

UHZ-517T34(T35)	
L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch, G、M、N、S、T 任选项option
R	4~20mA 二线制变送器 with two-wire transmitter
D	隔爆型 explosion proof type: dIIBT4
E	本安型 intrinsically safe type: ibIICT4
F	配隔离安全栅 matched with isolating barrier
A	XGTH-510(竖式)显示调节报警仪 with display and regulating instrument(upright)
B	XGTA-810(横式)显示调节报警仪 with display and regulating instrument(horizontal)
J2	循环水加热夹套 with cycling water heating jacket
J3	真空夹套 with vacuum jacket
J4	电伴热装置 electrical heating equipment
<input type="checkbox"/>	测量范围 measruing range(mm)
<input type="checkbox"/>	介质密度 specific gravity of medium(g/cm ³)
<input type="checkbox"/>	工作压力 operating pressure (MPa)

