

## UGS-B 普通型彩色石英玻璃液位计

### UGS-B COMMON COLOR QUARTZ GLASS LIQUID LEVEL GAUGE

## UGS-G 大口径石英玻璃液位计

### UGS-G HEAVY-CALIBRE QUARTZ GLASS LIQUID LEVEL GAUGE

#### 适用范围 SUITABLE RANGE

UGS-B 普通型彩色石英玻璃液位计适用于透明或较透明介质，如水、液氨、汽油、液化气、常温碱液等多种烃、油品溶液的液位测量。仪表显示有盲区。

UGS-G 大口径玻璃液位计适用于大粘度有色介质的液位测量，如重油，润滑油等。仪表采用偏心大口径角阀和大内径液位管，配以伴热管，可以确保可靠测量。

UGS-B common color quartz glass liquid level gauges are suitable for transparent or relatively transparent mediums including various hydrocarbons and oils such as water, liquefied ammonia, gasoline, liquefied gas and normal lye. Some blind area exists in indication.

UGS-G heavy-calibre glass liquid level gauges are suitable for heavy viscosity colored mediums such as heavy oil and lubricating oil etc.. Eccentric heavy caliber angle valve, big inner diameter pipe and heating pipe are used to assure reliable measurement.

#### 主要技术参数 SPECIFICATIONS

工作压力 operating pressure:

1.6, 2.5, 4.0, 6.4, 10.0MPa

工作温度 operating temperature: -50~450℃

测量范围 measuring range L:

(两法兰间中心距CL) 300、500、800、1100、1400、1700、2000mm。

显示范围 indicating range:

测量范围 measuring range L-200mm

过程连接 process connection:

DN25(或DN20、DN40)凸面(或平面)，法兰标准HG20592~20635-97，其它法兰标准请用户注明。Convex flange as above, other on request.

接液材质 contacting material:

碳钢 carbon steel,

不锈钢 1Cr18Ni9Ti, 304SS, 316L

99.99%SiO<sub>2</sub> 石英管 quartz tube

液位计配套 attachment: 带排污阀 with drain valve

可选项 options:

蒸汽加热夹套 with steam heating jacket:

工作压力 operating pressure 1.0MPa,

接口尺寸 joint G1/2" 外螺纹 outer thread。

循环水加热夹套 with cycling water heating jacket:

工作压力 operating pressure 1.0MPa,

接口尺寸 joint G3/4" 外螺纹 outer thread。

电伴热 with electrical heating equipment

订货须知 order information

型号 model;


工作压力 operating pressure;

工作温度 operating temperature;

测量范围 measuring range;

材质 material;

过程连接 process connection

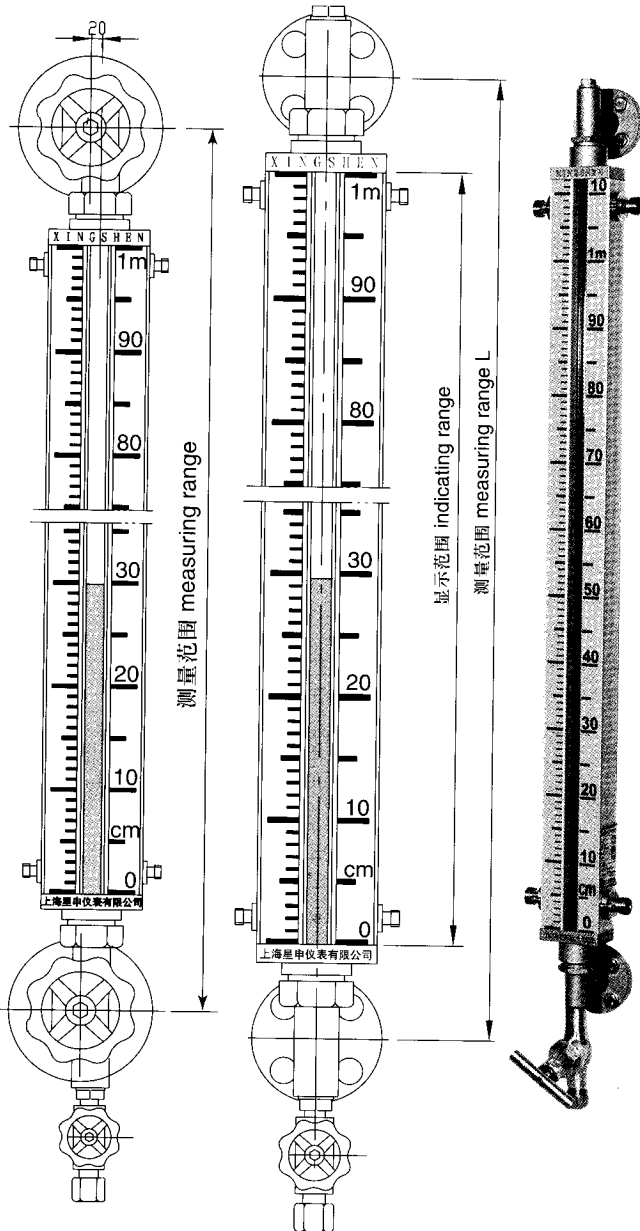

UGS-B 型